


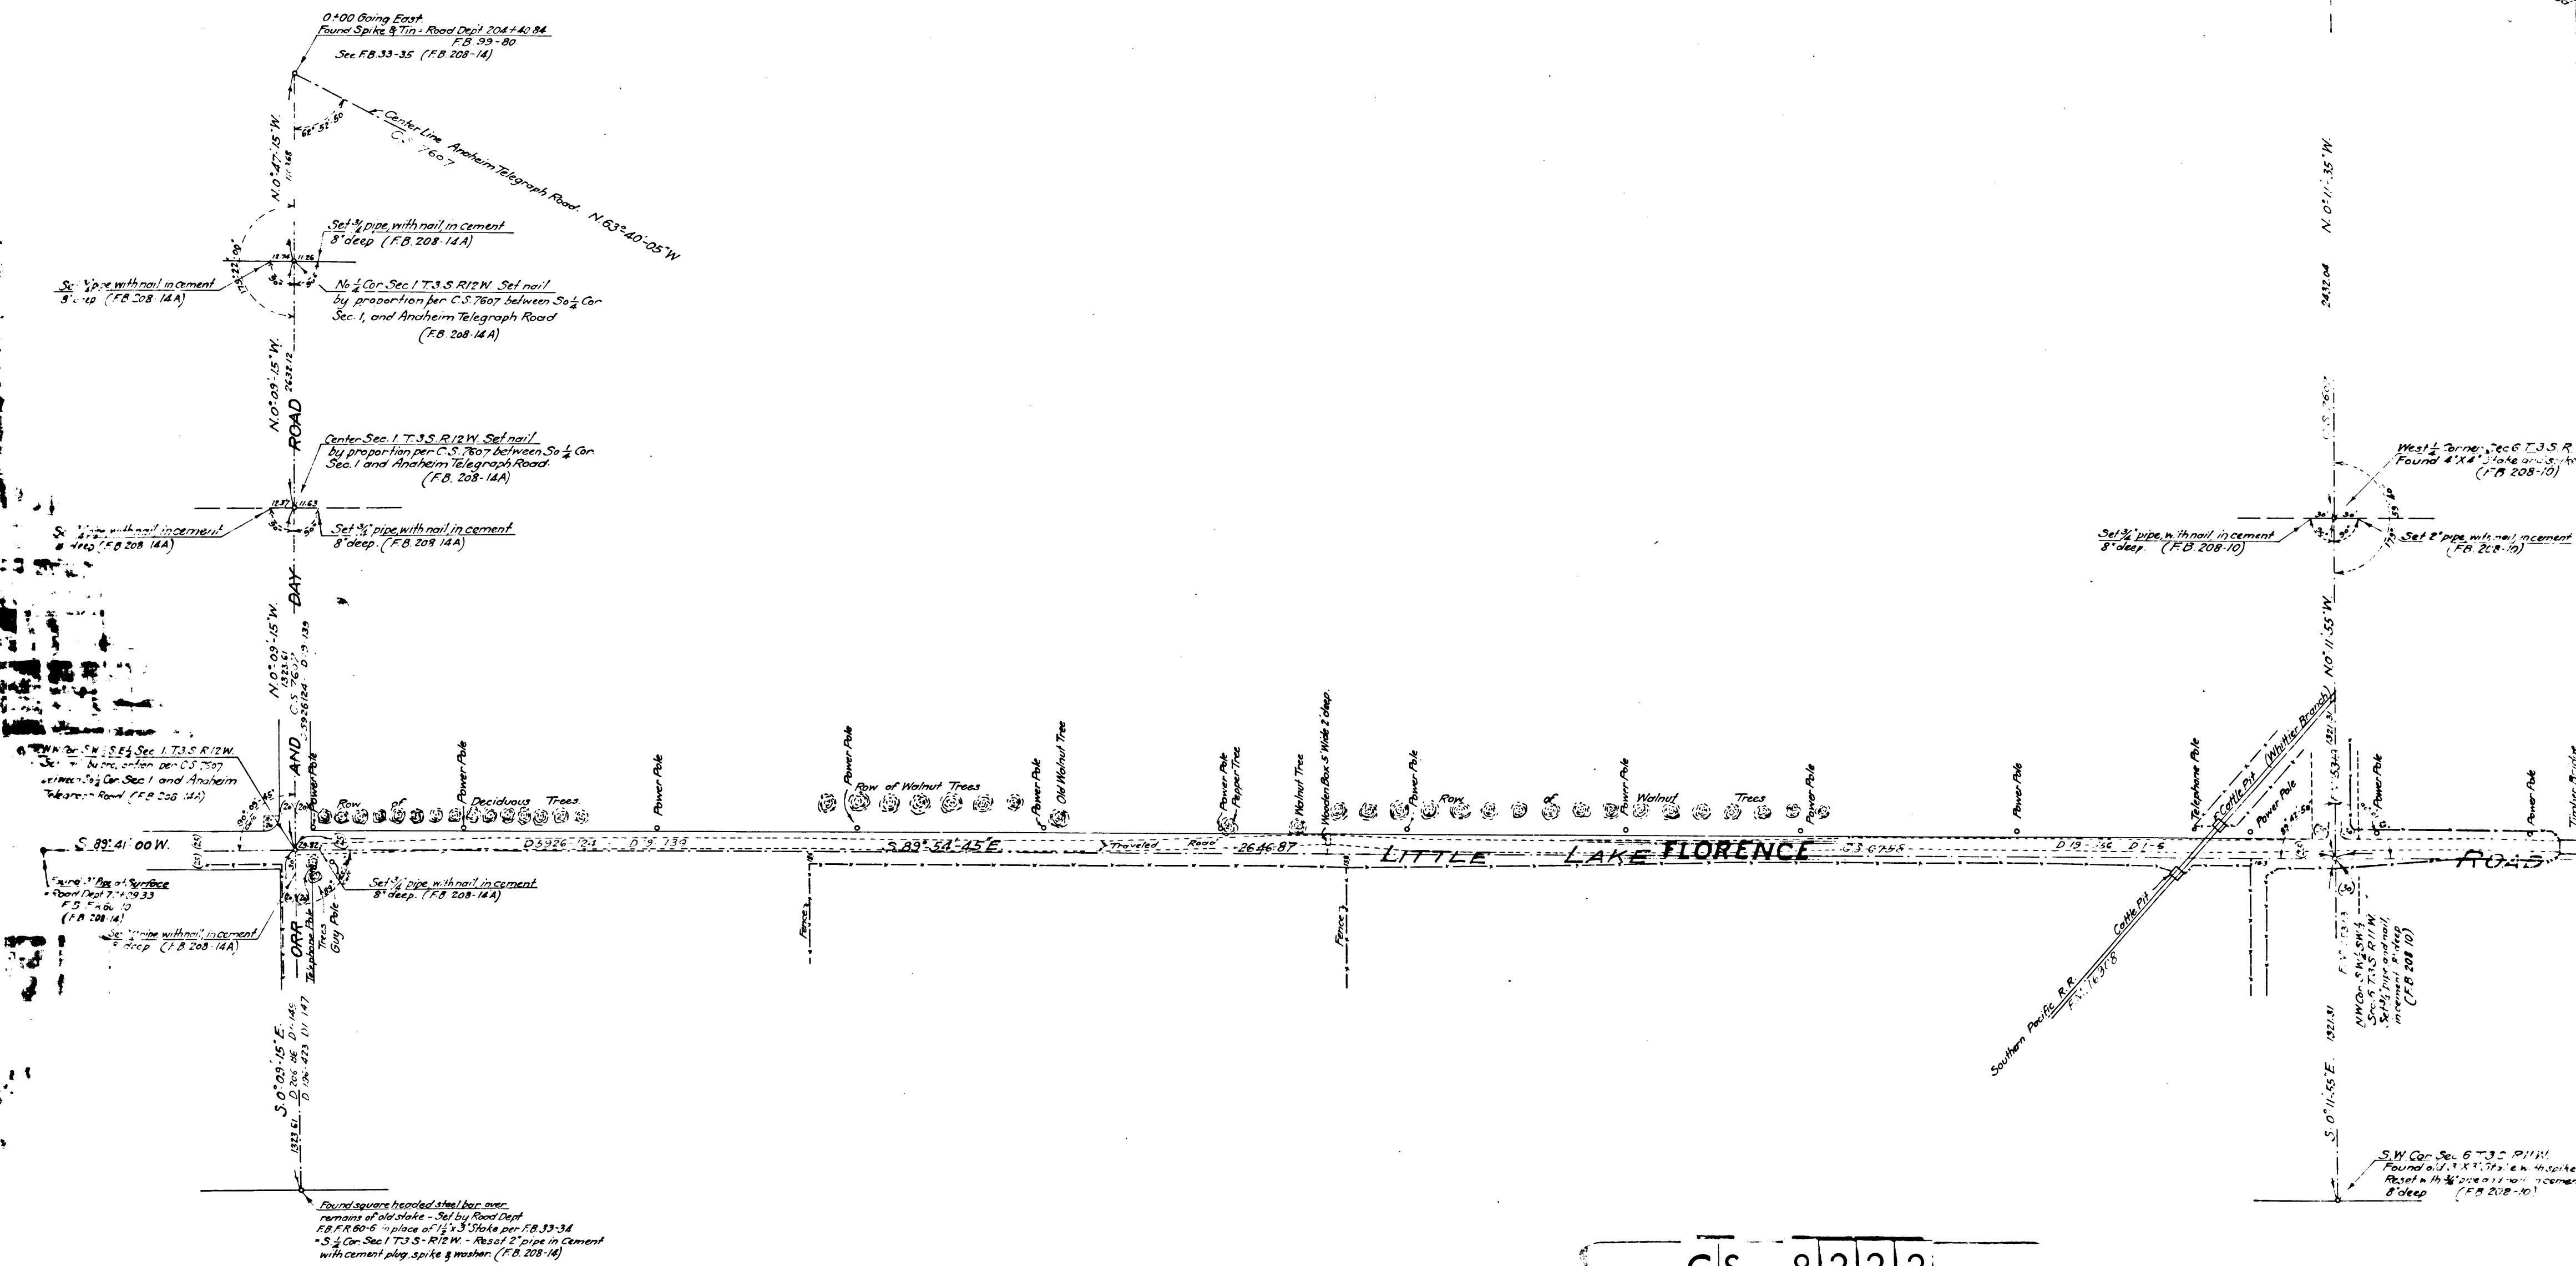

CS 8222
A1 OF A3


MAP OF
FLORENCE AVENUE
LITTLE LAKE ROAD

(FORMERLY SANTA GERTRUDES ROAD No.2)
FROM
ORR AND DAY ROAD TO BUTLER ROAD.
County Surveyors Map No. 8222.

J. E. ROCKHOLD COUNTY SURVEYOR
SURVEYED JUNE 1920
SCALE 1"=100'

Surveyed under instructions of the Board of Supervisors per order dated June 16, 1920.
Bearings based on center line of Anaheim Telegraph Road as per C.S. 7607.
F.B. 208-1 to 14A
Field work by Warren
Platted by Warren
Checked by Stoddard

11.33

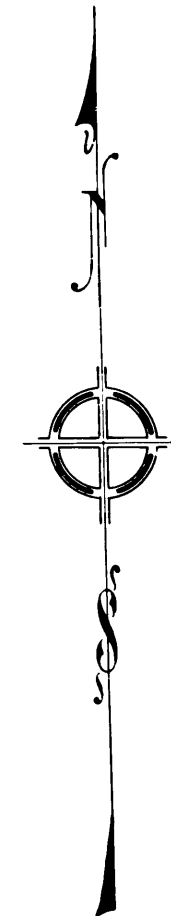

29.6755 from West. Set Spike and Washer
by proportion between Orr & Day Road and Norwalk
& Puente Hills Road per C.S. 7607
(F.B. 208-10)

Center Line Anaheim Telegraph Road
N 63° 40' 05" W 104.69
Found Road Dept. Spike & Tin
Sta 265+15.45 per F.B. 39-87
See C.S. F.B. 33-36
(F.B. 208-6)
Center Line Fulton Ave.
Found Road Dept. Spike & Tin
Sta 0+00 per F.B. 121-72
(F.B. 208-6)

Center of Section 6 T.3 S. R.11 W.
Set 2" Pipe in cement with Spike and Washer 6" below surface
by proportion per C.S. 7607 between Center Line of
Anaheim Telegraph Road and So. 4 Cor. Sec. 6
Found 2-1"x2" stakes with spike 0.30 East of pipe
(F.B. 208-6)

NE Cor. S.E. 1/4 Sec. 6
Set Spike and Washer 264.52 from East
10400 Going West (F.B. 208-6)
Found 1 1/2" pipe
(F.B. 208-6)
Center Line Mills Road
N 0° 0' 0" E 1322.12
Found 1 1/2" pipe with nail in cement
8" deep (F.B. 208-6)

South 1/2 Section 6 T.3 S. R.11 W.
Found 1 X2 Stake with nail
0.1' under surface of pavement
Road Dept 364+87.33 per F.B. 121-77
(F.B. 208-6)

Set 1/2" pipes with nails in cement
8" deep (F.B. 208-6)

RANCHO SANTA GERTRUDES
SUBDIVIDED FOR
SANTA GERTRUDES LAND
M.R. 1-502
THE ASSOCIATION
FLORENCE AVENUE
LITTLE LAKE ROAD

CS 8222

A2 OF A3

Found Road Dept Spike & Tin
Sta 265+15.45 per F.B. 93-87
See C.S. F.B. 33-36
(F.B. 208-6)


Center Line Fulton Ave.

Found Road Dept Spike & Tin
Sta 400 per F.B. 121-72
(F.B. 208-6)

Center of Section 6 T.33 R.11 W.
Set 2" Pipe in cement with Spike and Washer 6' below surface
by comparison with C.S. 7607 between Center Line of
Anaheim Telegraph Road and So. 1/4 Cor. Sec. 6
Found 2" x 2" stakes with spike 0.30 East of pipe.
(F.B. 208-6)

Center Line of Fulton Ave.

Found Road Dept Spike & Washer
F.B. 93-93 F.B. 2113-6
(F.B. 208-2)

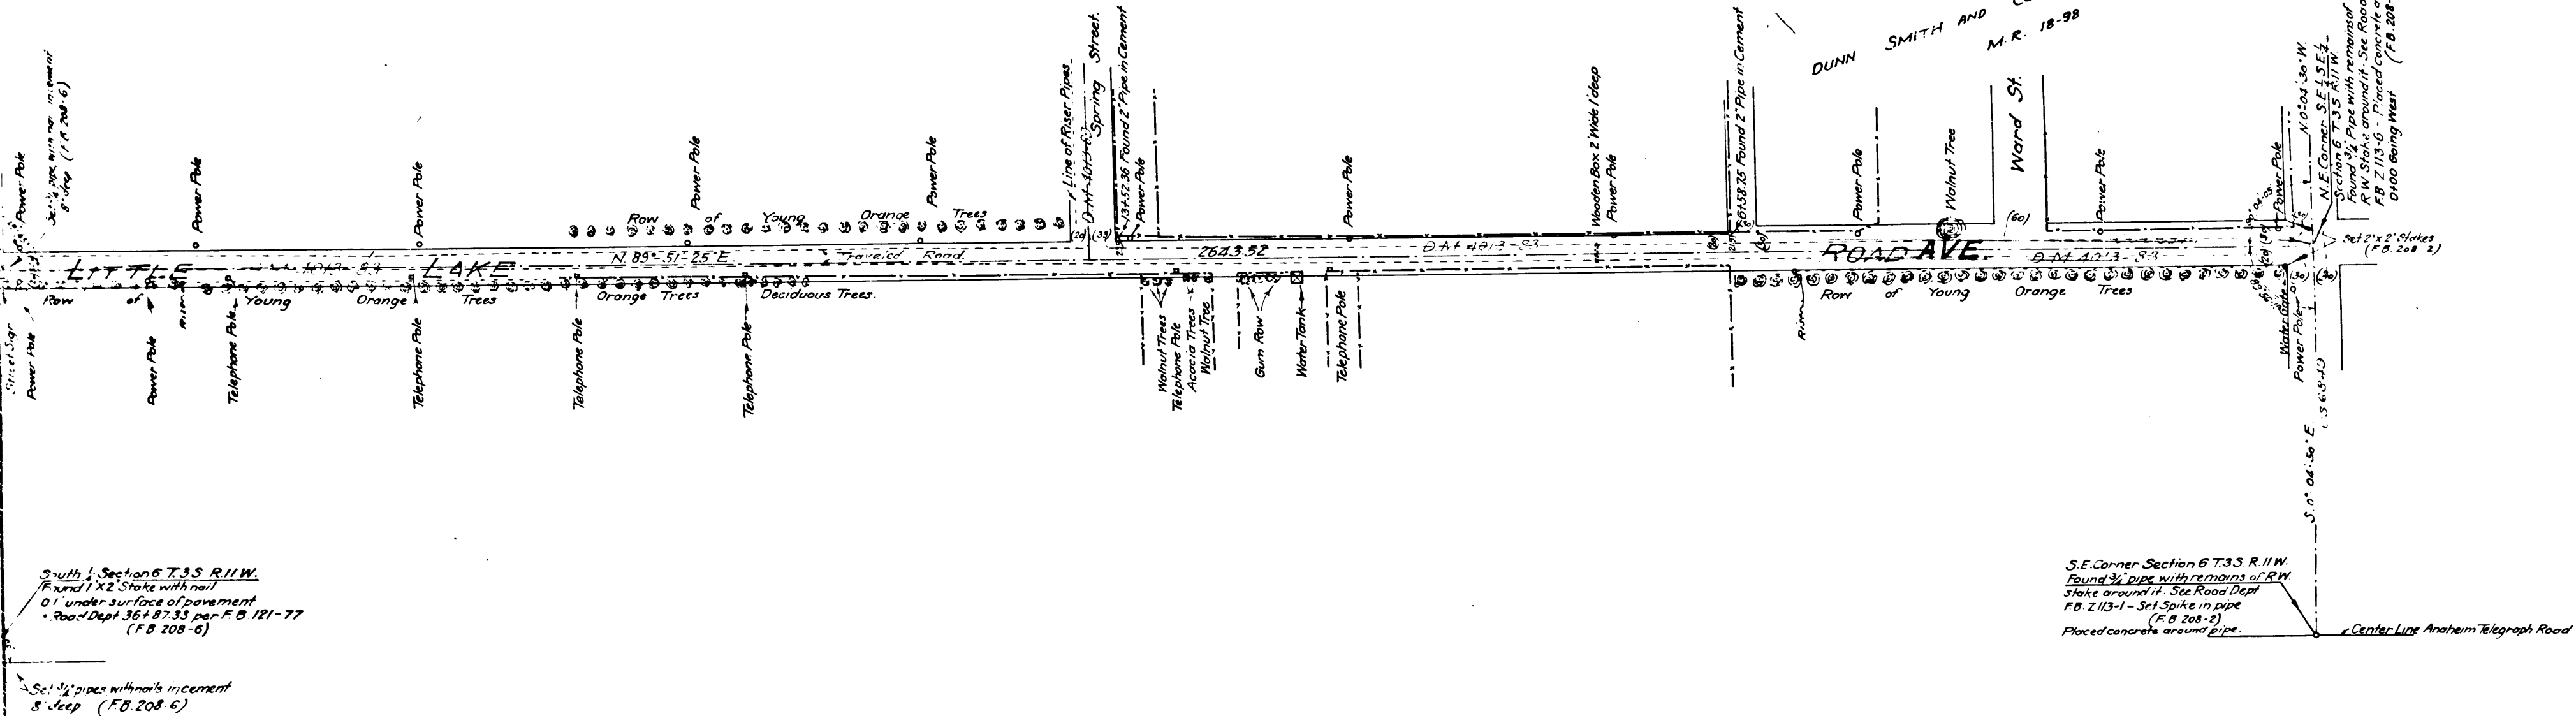

S.E. Corner Section 6 T.33 R.11 W.
Found 3/4" pipe with 1/2" means of RW
Spike around it. See Road Dept
F.B. 2113-1 - Set Spike in pipe
(F.B. 208-2)
Placed concrete around pipe.

CS 8222
A3 OF A3