8110

L.A.Co. Road Dept. B.M."C" L.O.530-117, Elev.=138.38
Sierra Ave. & Eastland Ave., N.W. Cor.
N. Let of 2 Lots, 6'S of N end C.R.

1. Use Standard Manhole Frames and Covers, S-a-117
2. Use Standard Strength Pipe.
3. Use Cement Mortar for all Vitrified Clay Pipe Joints.
4. Resurface all trench within paved Area to meet L.A. County Road Dept. requirements.
5. Encase four feet of Sewer at points of interference with Poles as per S-a-119.
6. All Structures shall be Brick Sewer Structures, S-a-104
7. Construct tops of Structures in Rights of Way 6" above finished grade.

NOTE:
No representative of the County Engineer will survey or lay out any portion of the work. The owner or his authorized representative shall furnish the County Engineer with Grade Sheets and Stations for all House Connections and Y Branches, and shall provide stakes for them at their proper locations with stationing plainly marked. Any change of location shall be requested in writing by the owner or his representative.
No revisions shall be made in these Plans without approval of the County Engineer.

PROFILE, ALIGNMENT AND GRADE OF
SANITARY SEWERS
TO BE CONSTRUCTED IN
EASTERN AVENUE
BETWEEN EASTLAND AVE. & SHEILA ST.

PRIVATE CONTRACT NO. 659
W.S. 36
SHEET 1 OF 1 SHEET

Scale: Vert. 1"=4' Oct. 1947
Hor. 1"=40'

PREPARED IN THE OFFICES OF
JONES & GILBERT

By Hans Gilbert
Reg. C.E. No. 1797

FOR LEGEND
See Plan No. S-a-GG

NOTE:
Grades to which this improvement is to be constructed are shown on Plans and Profiles. Grade points for top of curb, center line of streets, or center line of alley are shown by circles on Profiles. At all points between designated points the grade shall be established so as to conform to a straight line drawn between said designated points.
Elevations are in feet above "U.S.C.G.S. Datum" or Mean Sea Level.
This drawing and the data thereon are hereby made a part of the specifications.
Work shall be constructed according to specifications on file in the office of the County Engineer and shall be prosecuted only in the presence of the County Engineer.
Before work can be started, the Contractor must obtain a permit to excavate in County streets from the L.A. County Road Dept. 1104 Hall of Records and make a deposit with the County Engineer, 700 Fashion League Building, sufficient to cover the cost of Construction Inspection and Record Plans.

COUNTY OF LOS ANGELES, CALIFORNIA

APPROVED Alfred Jones
County Engineer

APPROVED Chief Engineer of County Sanitation District No. 2

CHECKED L.D. Mc Nee Oct 10, 1947
Office of County Engineer, Reg. C.E. No. 6322

Approved for the collection of liquid industrial waste.
Connection Permits must be obtained from the County Engineer.
Date 10/15/47
Industrial Waste Engineer, Office of County Engineer.

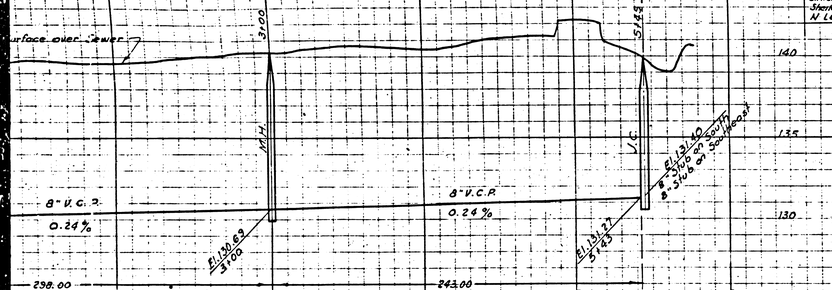

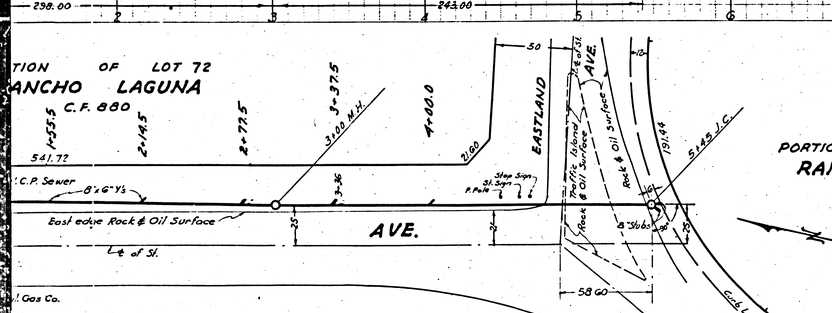



P.C. 659
INDEX MAP
Scale: 1"=600'

Final Ck T.T.P. 9/27/48

BC 659

M8

M8

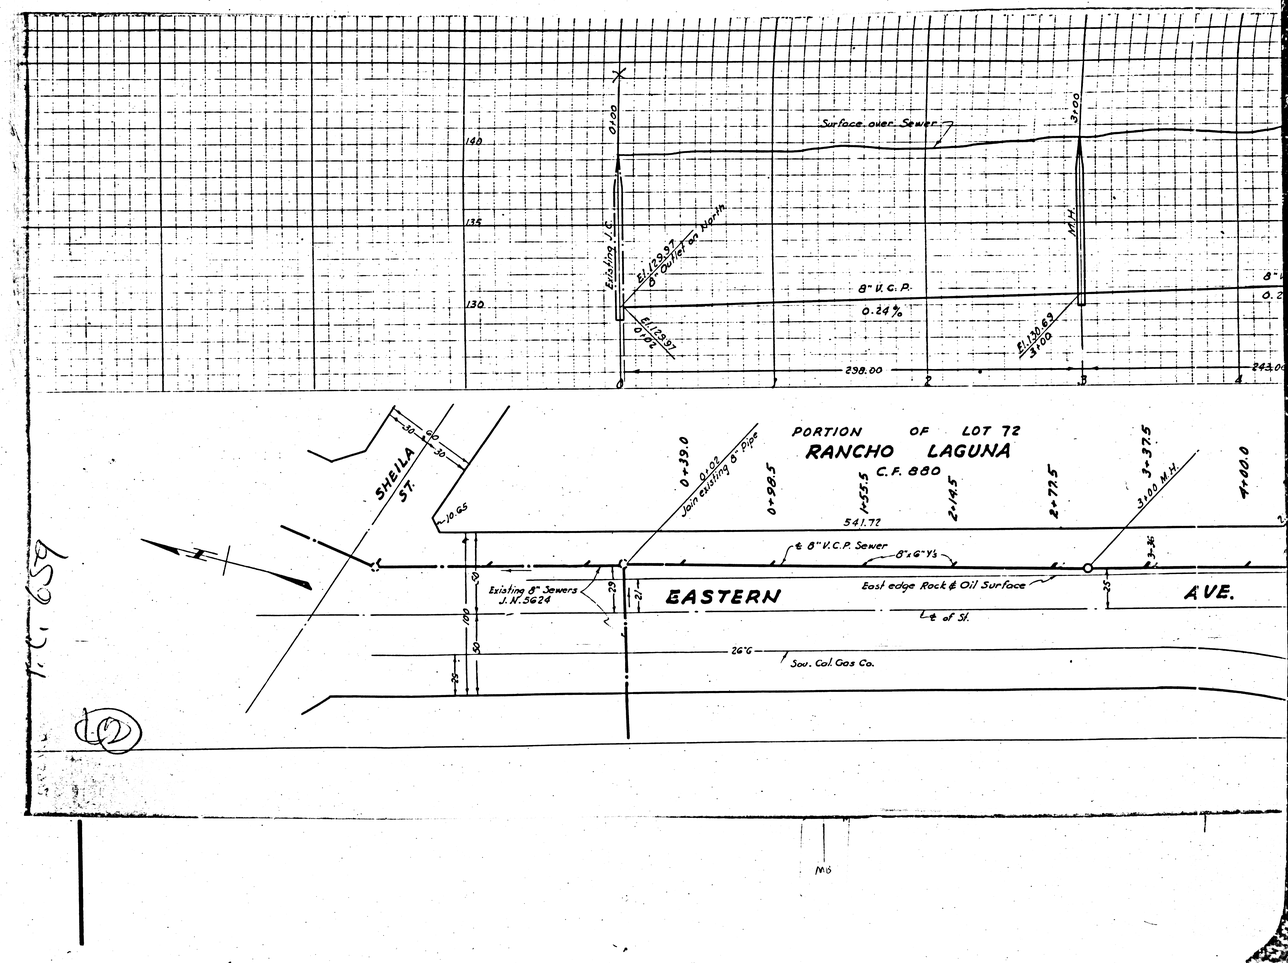
Surface over Sewer
Existing I.C.
El. 129.97
8" Outlet on North
8" V.C.P.
0.24%
El. 129.37
0.12%
El. 130.69
3+00
298.00
M.H.
SHEILA ST.
30
30
30
10 Gas
PORTION OF LOT 72
RANCHO LAGUNA
C.F. 880
0+39.0
0+98.5
1+55.5
2+14.5
2+72.5
3+37.5
4+00.0
3.00 M.H.
Join existing 8" Pipe
541.72
8" V.C.P. Sewer
8"x6"Y's
Existing 8" Sewers
J.N. 5624
EASTERN
East edge Rock & Oil Surface
℄ of St.
AVE.
26'6
Sou. Cal. Gas Co.
T.C. 659
10