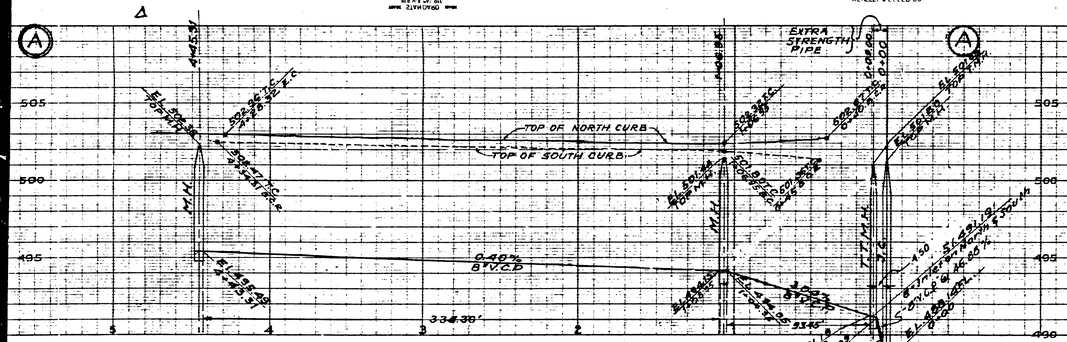

(13,988)

(1) USE STANDARD MANHOLE FRAME AND COVER S-a-117
(2) USE STANDARD STRENGTH PIPE, (EXCEPT AS NOTED)
(3) USE CEMENT MORTAR FOR ALL VITRIFIED CLAY PIPE JOINTS
(4) RESURFACE ALL TRENCH WITHIN PAVED AREA TO MEET LOS ANGELES COUNTY ROAD DEPARTMENT REQUIREMENTS
(5) CONSTRUCT HOUSE CONNECTIONS WITH INVERT AT PROPERTY LINE 5 FEET BELOW CURB GRADE.
(6) ALL STRUCTURES SHALL BE BRICK SEWER STRUCTURES S-a-104
(7) ENCASE FOUR FEET OF SEWER AT POINTS OF INTERFERENCE WITH POLES AS PER S-2-113

BENCH MARK #1
Elev. 497.460 - Curb Angle on N.W. st. Corner of Intersection of OAK Avenue and MADRI Drive as per F.B. L.G. 373-1

NOTE:
No representative of the County Engineer will survey or layout any portion of the work.
The owner or his authorized representative should furnish the County Engineer with Grade Sheets and stations of all Y branches and shall provide stakes for them at their proper locations with stationing plainly marked. Any change of Location shall be requested in writing by the owner or his representative. No revision shall be made in these plans without approval of the County Engineer.

PROFILE, ALIGNMENT, AND GRADE OF
SANITARY SEWERS
TO BE CONSTRUCTED IN
(A) LEROY STREET
FROM
OAK AVENUE TO 484' WEST OF OAK AVENUE
(B) OAK AVENUE
FROM 1'L
LEROY STREET TO 150' SOUTHERLY

TRACT No 15525
PRIVATE CONTRACT NO. 1873
SHEET 1 OF 1 SHEET
W.S. 44
SCALE VERT. 1"=4' HORZ. 1"=40'
JUNE 1952

PREPARED IN THE OFFICE OF
BARNETT, HOPPE & SMITH
CIVIL ENGINEERS AND LAND SURVEYORS
BY Harold A. Barnett
HAROLD A. BARNETT R.E. 12816

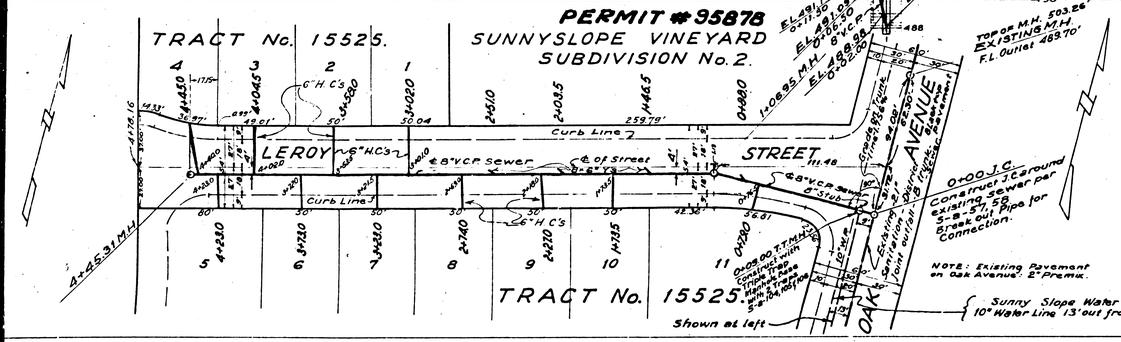

Note:
Before breaking into any existing structure and before final acceptance of this work, County Sanitation District should be notified in order that required inspection may be made.

Before breaking into any existing structure and before final acceptance of this work, County Sanitation District should be notified

Checked 11-15-52 W. Larson

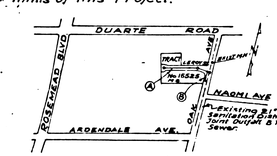

INDEX MAP
P.C. 1819 J.N. 3938
TRACT No 15525
SCALE 1"=600'

Approved: R. M. RAWN
Chief Engineer of County Sanitation District No. 2
By: A. Ash
Office Engineer

Approved: C. E. Hinrichs
County Engineer

Note:
Stoppers to be installed with joint compound by manufacturer at his Plant. Spec's. Sec. 33.48.
Approval of this plan by the COUNTY OF LOS ANGELES does not constitute a representation as to the accuracy of the, location of or the existence of any underground Utility, Pipe or Structure within the limits of this Project.

NOTE:
Grades to which this improvement is to be constructed are shown on plan and profile. Grade points for top of curb, center Line of street are shown by circles on Profiles. At all points between designated points the grade shall be established so as to conform to a straight Line drawn between said designated points.
Elevations are in feet above U.S.G.S. datum or mean sea level.
This drawing and the data hereon are hereby made a part of the specifications.
Work shall be constructed according to specifications on file in the office of the County Engineer and shall be prosecuted only in the presence of the County Engineer.
Before work can be started the Contractor must obtain a permit to excavate in County Streets from the L.A. County Road Department, 211 South Main Street, and make a deposit with the County Engineer, R.M. 830-108 W. 2nd. Street, sufficient to cover the cost of construction, inspection, and record plans.
If work is to be done in a State highway, a permit must be obtained from the State of California, Division of Highways, 808 State Building, after making a deposit with the County Engineer.
COUNTY OF LOS ANGELES, CALIFORNIA.

Checked by John A. Zimmerman 9-5-51
Office of County Engineer

bC 1819
SEE W.S. 44

13,989
TOP OF CURBS
T.T.M.H.
M.H.
8"-V.C.P.
OAK
AVENUE
Calif-Mich. Land & Water Co.
Sou. Counties Gas Co.
Sunny Slope Water Co.
Existing 21" Sanitation District Joint Outfall Trunk Sewer.
SUNNY-SLOPE VINEYARD SUBDIVISION No. 2.
LEROY STREET
TRACT No. 15525.
11
12
505
500
495
490