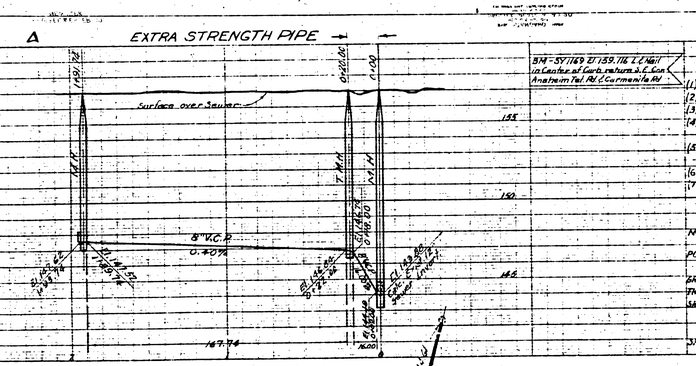

S14-S7.1169 27.159.116 L.C.N.G.
In Center of Lots return A.C. Cor
Anaheim Tel Rd & Carmenita Rd

(1) USE STANDARD MANHOLE FRAMES AND COVERS, S-a-117
(2) USE STANDARD STRENGTH PIPE EXCEPT AS NOTED.
(3) USE CEMENT MORTAR FOR ALL VITRIFIED CLAY PIPE JOINTS.
(4) RESURFACE ALL TRENCH WITHIN PAVED AREA TO MEET LOS ANGELES COUNTY ROAD DEPARTMENT REQUIREMENTS
(5) CONSTRUCT HOUSE CONNECTIONS WITH INVERT AT PROPERTY LINE 5 FEET BELOW GRADE OF CURB.
(6) ALL STRUCTURES SHALL BE BRICK SEWER STRUCTURES, S-a-104
(7) ENCASE FOUR FEET OF SEWER AT POINTS OF INTERFERENCE WITH POLES AS PER S-a-119

NOTE:
NO REPRESENTATIVE OF THE COUNTY ENGINEER WILL SURVEY OR LAY OUT ANY PORTION OF THE WORK.
THE OWNER OR HIS AUTHORIZED REPRESENTATIVE SHALL FURNISH THE COUNTY ENGINEER WITH GRADE SHEETS & STATIONS OF ALL HOUSE CONNECTIONS & Y BRANCHES & SHALL PROVIDE STAKES FOR THEM AT THE P. PROPER LOCATION WITH STATIONING PLAINLY MARKED. ANY CHANGE OF LOCATION SHALL BE REQUESTED IN WRITING BY THE OWNER OR HIS REPRESENTATIVE
NO REVISIONS SHALL BE MADE IN THESE PLANS WITHOUT APPROVAL OF THE COUNTY ENGINEER
STOPPERS TO BE INSTALLED WITH JOINT COMPOUND BY MANUFACTURER AT HIS PLANT
SPECS. SEC. 38.48
CONCRETE PAVEMENT TO BE CUT NOT LESS THAN 2" IN DEPTH WITH CONCRETE SAW. SPECS. SEC. 65

(13,976)

PROFILE, ALIGNMENT AND GRADE OF
SANITARY SEWERS
TO BE CONSTRUCTED IN
SANITARY SEWER RIGHT OF WAY
IN LOT 16 OF RESURVEY OF GUNN
& HAZARDS PLAT OF THE CULLEN TRACT

PRIVATE CONTRACT Nº 1969
W.S.-34
ONE SHEET

Scale Vert. 1"=4' Horz. 1"=40' NOV. 1951

PREPARED IN THE OFFICES OF
RALPH B. NUNNELLEY
BY: Ralph B. Nunnelley
Reg. C.E. Nº 8090

P.C. 1969

RESURVEY OF GUNN & HAZARD'S PLAT OF THE CULLEN TRACT
M.R. 34, 64

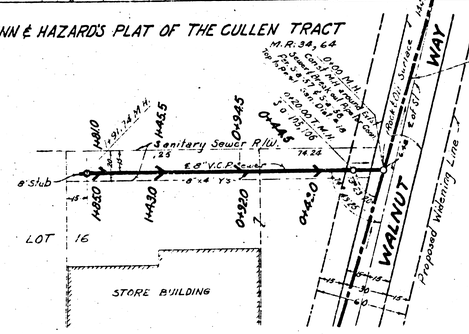

INDEX MAP

Scale 1" = 600'
P.C. 1969 J.N. 4101

Checked 1-10-52

FOR LEGEND
See Plan Nº S-a-64

NOTE
ELEVATIONS ARE IN FEET ABOVE U.S.G.S. DATUM OR MEAN SEA LEVEL
THIS DRAWING AND THE DATA HEREON ARE HEREBY MADE A PART OF THE SPECIFICATIONS
WORK SHALL BE CONSTRUCTED ACCORDING TO SPECIFICATIONS ON FILE IN THE OFFICE OF THE COUNTY ENGINEER AND SHALL BE PROSECUTED ONLY IN THE PRESENCE OF THE COUNTY ENGINEER
BEFORE WORK MAY BE STARTED THE CONTRACTOR MUST OBTAIN A PERMIT TO TRENCH IN COUNTY STREETS FROM LOS ANGELES COUNTY ROAD DEPARTMENT, 108 WEST 2ND ST. AND MAKE A DEPOSIT WITH THE COUNTY ENGINEER, 730 COUNTY ENGINEERING BUILDING SUFFICIENT TO COVER COST OF CONSTRUCTION INSPECTION AND RECORD PLANS.
IF WORK IS TO BE DONE IN A STATE HIGHWAY, A PERMIT MUST BE OBTAINED FROM THE STATE OF CALIFORNIA, DIVISION OF HIGHWAYS, 120 SOUTH SPRING ST. AFTER OBTAINING THE PERMIT WITH THE COUNTY ENGINEER
APPROVAL OF THIS PLAN BY THE COUNTY OF LOS ANGELES DOES NOT CONSTITUTE A REPRESENTATION AS TO THE ACCURACY OF THE LOCATION OF OR THE EXISTENCE OR NONEXISTENCE OF ANY UNDERGROUND UTILITY PIPE OR STRUCTURE WITHIN THE LIMITS OF THIS PROJECT.

COUNTY OF LOS ANGELES, CALIFORNIA

APPROVED WILLIAM J. FOX
COUNTY ENGINEER
BY A. L. Gregory

APPROVED A. M. RAWN
CHIEF ENGINEER OF COUNTY SANITATION DISTRICT Nº 1
BY [illegible]
CHIEF ENGINEER

Before breaking existing sewer facility
and before final [illegible] of this work
County Sanitation District [illegible] be notified
in order that [illegible] may be made.

CHECKED BY [illegible]
OFFICE OF COUNTY ENGINEER 1-15-52

P.C. 1969