

NO MINIMUM SPACING SHOWN  
REINFORCEMENT  
ALL REINFORCEMENT SHALL BE  
AS SHOWN  
MIN. 2 1/2" DIA.

NEW YORK  
REINFORCED PIPE CO.

(A. 687)


**USE STANDARD MANHOLE FRAME (COVER 5'-0" DIA.)**  
**USE EXTRA STRENGTH PIPE**  
**USE CEMENT MORTAR FOR ALL VITRIFIED CLAY PIPE JOINTS.**  
**REPAVE ALL TRENCH WITH IN PAVED AREA TO MEET L.A. COUNTY ROAD DEPARTMENT REQUIREMENTS. IN ACCORDANCE WITH THE PERMIT.**  
**ALL STRUCTURES SHALL BE BRICK SEWER STRUCTURES S. O. 104**  
**ENCASE 4' OF SEWER AT POINTS OF INTERFERENCE WITH POLES AS PER S. O. 113.**

The contractor shall be responsible for the maintenance of the work during the construction period and shall be liable for the cost of any damage to existing structures, utilities, or other property caused by the construction. The contractor shall be responsible for the removal of all debris and materials from the site. The contractor shall be responsible for the protection of all existing structures and utilities. The contractor shall be responsible for the maintenance of the work during the construction period and shall be liable for the cost of any damage to existing structures, utilities, or other property caused by the construction. The contractor shall be responsible for the removal of all debris and materials from the site. The contractor shall be responsible for the protection of all existing structures and utilities.

**PROFILE ALIGNMENT AND GRADE OF  
SANITARY SEWERS**  
TO BE CONSTRUCTED IN  
**SLAUSON AVENUE**  
Between  
**GARFIELD AVE. and a Point 375 East.**

**SHEET 1 OF 1 SHEET**  
**PRIVATE CONTRACT NO 2108**  
SCALE 4"=1'-0" HORIZONTAL  
**W-5-36** MARCH 1952  
**PREPARED BY TRACY R. BOUSMAN**  
J. N. 4245  
FOR LEGEND SEE PLAN N° S-O-64

**INDEX MAP**

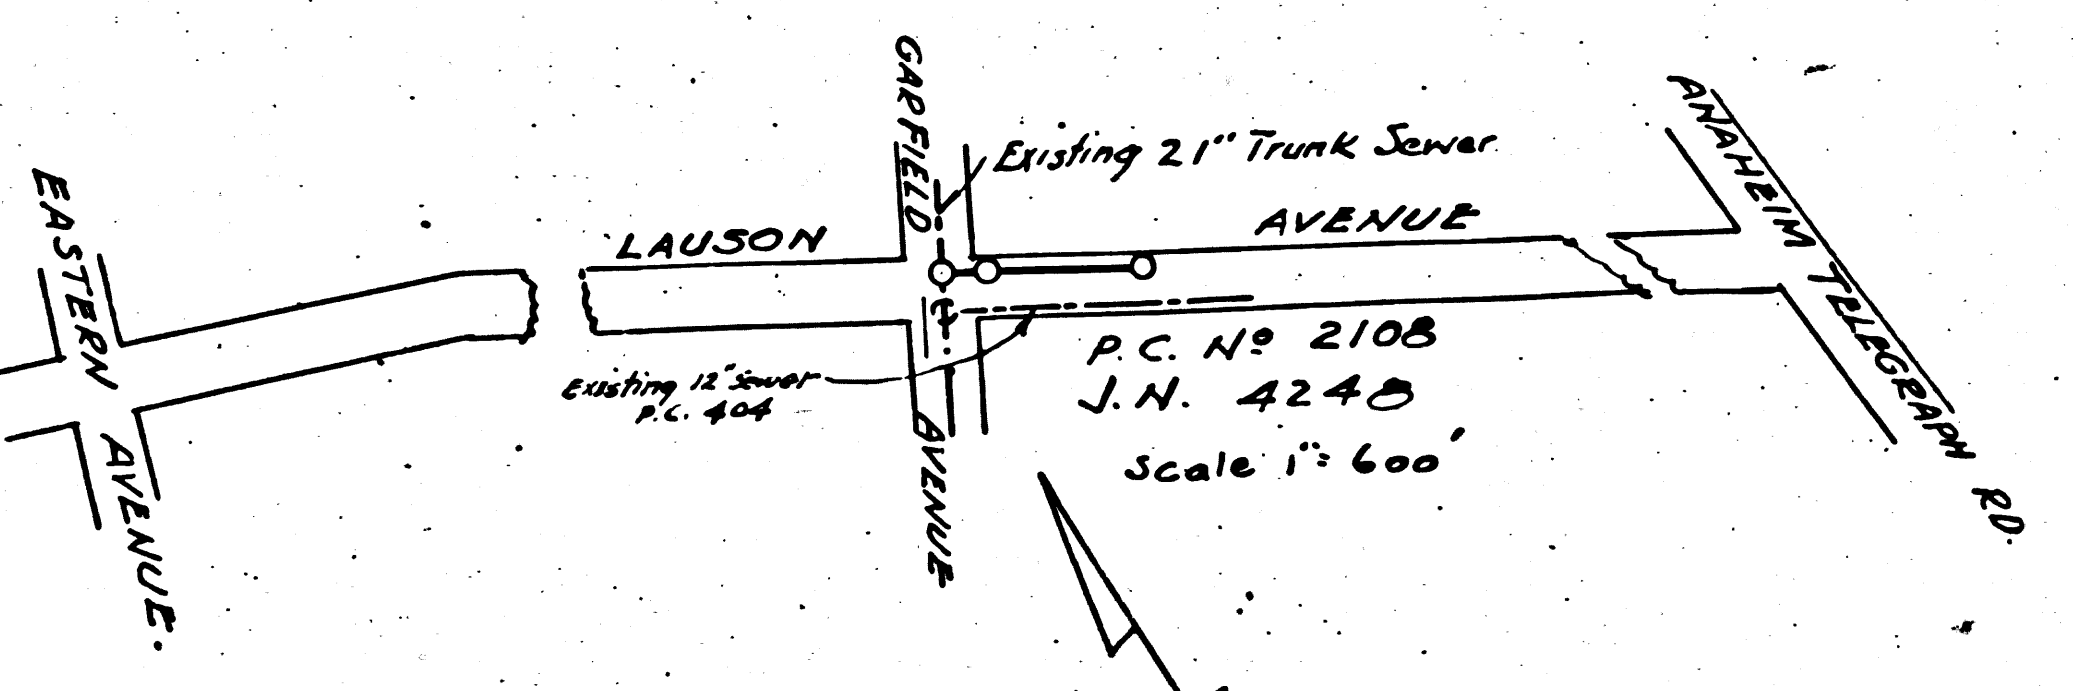

Grades to which this improvement is to be constructed are shown on plan & profile. Grade points to be set out by contractor are indicated on profile. All points between change of grade points shall be established so as to conform to a straight line drawn between said change of grade points.  
This drawing and the data hereon are hereby made a part of the Specifications. This drawing shall be construed according to specifications published in the office of the County Engineer and shall be prosecuted only in the presence of the County Engineer. Before work can be started the contractor must obtain a permit to excavate in County Street from the L.A. County Road Dept. 100 or Second St., and make a deposit with the County Engineer 525 L.A. County Engineering Bldg., sufficient to cover the cost of County inspection and report of plans.  
Approval of this plan by the County of Los Angeles does not constitute a representation as to the accuracy of the location of or the existence or non-existence of any underground utility pipe or structure within the limits of this project.

**COUNTY OF LOS ANGELES, CALIFORNIA**  
APPROVED  
BY **WM. J. FOX** COUNTY ENGINEER  
BY **W. J. FOX** CHIEF DEPUTY  
APPROVED  
BY **A. M. RAWIN** CHIEF ENGINEER  
BY **W. J. FOX** CHIEF DEPUTY  
COUNTY SANITATION DIST. NO 2  
OFFICE ENGINEER

Before breaking into any existing structure and before final acceptance of this work, County Sanitation District should be notified. A second inspection may be made. Checked 6-23-52. [Signature]  
CHECKED BY **Walter S. ...** DATE 4-1-52  
OFFICE OF THE COUNTY ENGINEER  
R.E. NO. 12860


D.M. SYLVE, L.A. COUNTY RD. DEPT.  
MAY 15 1946, P.L. 39, 122.  
L.A. CO. HIGHWAY DEPT.  
COR. GARFIELD & SLAUSON.

115  
140  
135

P.C. 5108

P.C. 5108

V.V. 4548

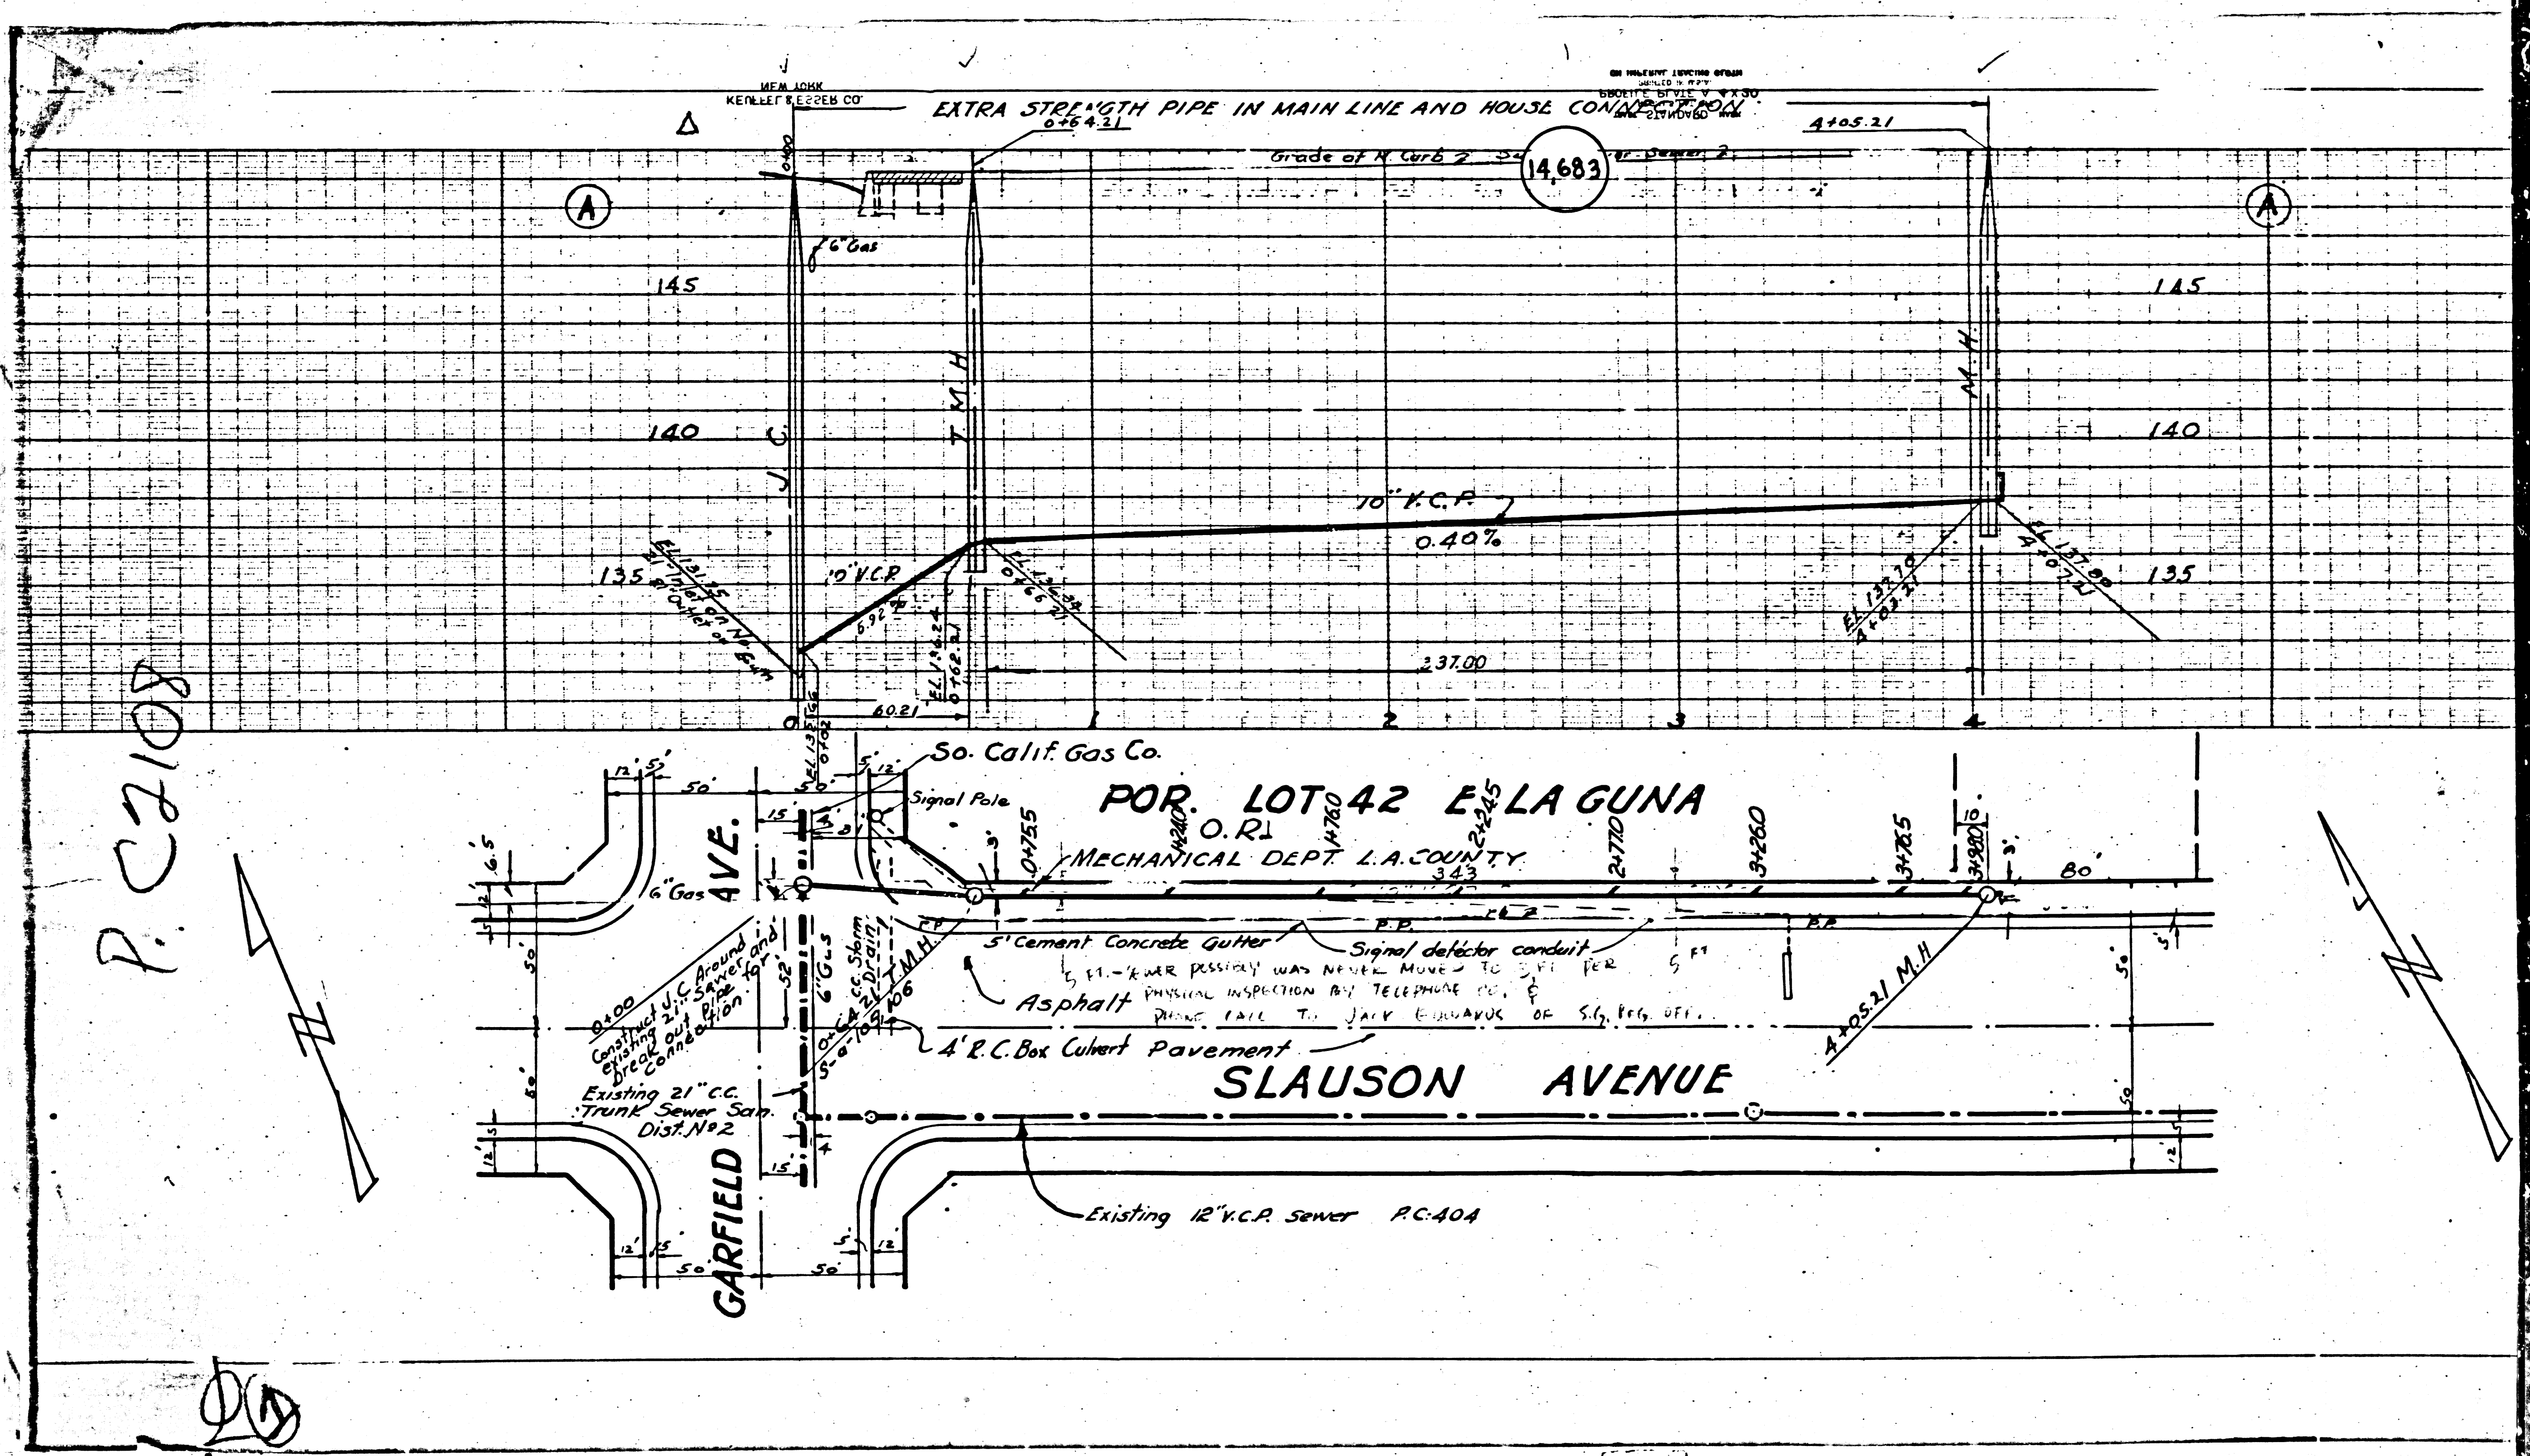

P. 27108

DD