


2
29

Copied from Photographic Copies
furnished by
U.S. General Land Office
Washington, D.C.

18.
19.
26
4

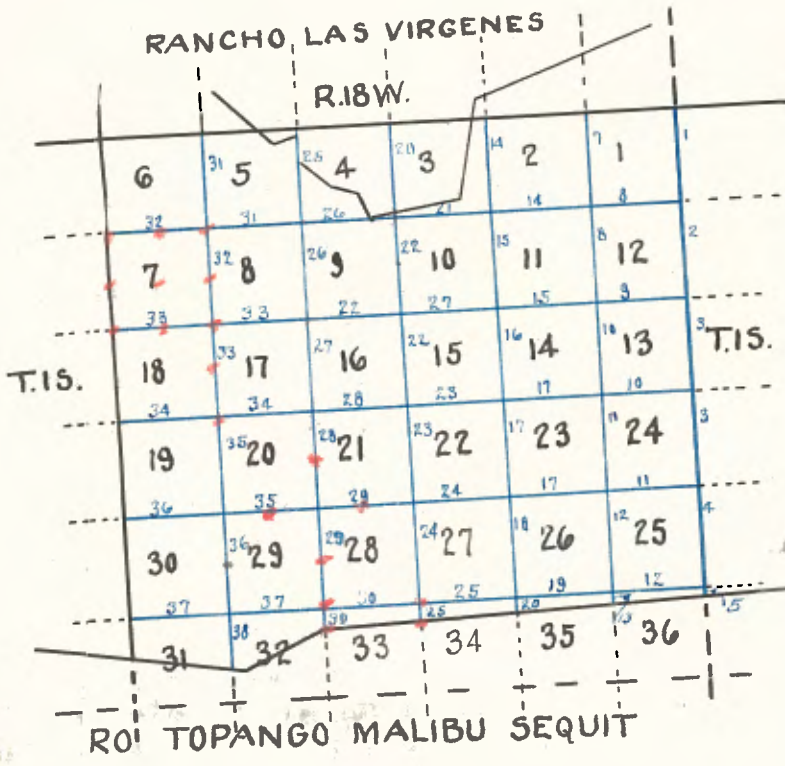

W. Boundary T. 1 S., R. 17 W., S. B. M.

From the cor. to Twp. 1 N. and 1 S., Rs. 17 and 18 W. on San Bernardino base line, previously rebuilt by me, I run south on a true line bet. secs. 1 and 6.

Var. 14° 30' East

Domingo's house bears S 26° E

Descend
Cross Gulch 4 lks. wide course S 45° W and over valley bears N. E. and S. W.

14.00 Cross same Gulch 12 lks. wide, course S. E., leave valley and ascend.

Domingo's house bears S 70° E.

19.00 Top of spur bears N. E. and S. W. and

Descend

26.00 Cross Creek 20 lks. wide, course S 5° W. and ascend

40.00 To a point in a road bears N 25° E. and S 25° W. and sunk a sandstone

20 lks. in the ground, marked $\frac{1}{2}$ on W. face - Thence I run E 13 lks. and set a post 3 ft. long, 3 ins. square, with marked stone, 12 ins. in the ground for witness cor. to $\frac{1}{2}$ sec. cor. marked W. C. $\frac{1}{2}$ S. on W. face, dug pits 18x12 ins. N. and S. of post 5 $\frac{1}{2}$ ft. dist. and raised an earth mound, $\frac{1}{2}$ ft. high, $\frac{1}{2}$ ft. base around post.

Thence I run W 13 lks. to true line

40.20 Cross road bears N 8° E. and S 8° W.

48.50 A school house bears W 52 lks. dist.

59.85 Cross fence bears E. and W.

70.00 Top of spur bears E. and W. and

Descend

77.00 A house bears E 184 lks. dist.

78.10

Cross road bears E. and W. at forks of road which bears S. and along same

80.00

Sunk a sandstone 20x12 ins. in the ground, in center of road,

for cor. to base. 1.6, 7 and 12 marked with 1 notch on N. and 5 notches on S. edges. This being an impracticable point to further mark cor. I set a post, 4 ft. long, 4 ins. square, 12 ins. in the ground 15 lks. due East of this point for witness cor. to secs. 1, 6, 7 and 12 marked

W. C. T. 1 S. S. 6 on N. E.

R 17 W S 7 on S. E.

R 18 W S 12 on S. W. and

S 1 on N. W. faces, with 1 notch on N. and 5 notches on S. edges, from which bears

A willow, 10 ins. dia. S 40° E. 144 lks. dist. marked

L. S. R. 17 W. W. C. S. 7 N. E.

No other trees within limits; raised a stone mound around post.

Pits impracticable.

Land broken and rolling.

Sold and 3rd. date.

Scattered willow and sycamore timber and dense undergrowth of

Oct. 22nd. 1895

Oct. 23rd. 1895.

Scattered oak timber and dense undergrowth of same and charred. Soil 2nd and 3rd rate Land for N. 60.00 chs. rolling valley, remainder rough and mountainous pits impracticable.

No other tree within limits; raised a stone mound alongside corner

1 S R 18 W S 13 B.T.

143 lks. dist. marked

A live oak 10 ins. dia. S 60° 20' W

R 17 W. S 18 B.T.

7 lks. dist. marked T 1 S.

A live oak 5 ins. dia. S 22 1/2° E

R 17 W. S. 7 B.T.

118 lks. dist. marked T. 1 S.

A live oak 8 ins. dia. N 62 1/2° E.

S. edges, from which bears

Sacs. 7, 12, 13 and 18 marked with 2 notches on N. and 4 notches on

Set a sandstone 24x36 ins. 18 ins. in the ground for cor. to

Cross gulch 8 lks. wide, course S. E. and ascend

Cross trail bears N. W. and S. E.

Top of spur, bears N 65° E. and W and descend

Cross gulch 6 lks. wide, course W. and ascend

Top of ridge, bears E. and W. and descend

Leave valley, bears N. E. and S. W. and ascend

Cross gulch, 6 lks. wide, course W.

Enter dense brush bears E. and W.

Cross road bears E. and W.

163 lks. dist. marked 1/2 S. B. T.

A white oak 30 ins. dia. S 70 1/2° W

1.47 lks. dist. marked 1/2 S. B. T.

White oak 32 ins. in dia. N 53 1/2° E

1/2 on W. face, from which bears

marked

Set a sandstone 30x12x8 ins., 22 ins. in the ground for 1/2 sec. cor.

Cross fence bears E. and W.

Cross creek 25 lks. wide, course S 45° W and over rolling valley

Leave road bears N. and S. W. and continue to descend

H. R. Stokes house bears E. 62 lks. dist.

A well bears E. 26 lks. dist.

Descend along road through rolling valley

South on a true line, bet. sacs. 7 and 12 Var. 14° 30' East

From the true point for cor. to sacs. 1, 6, 7 and 12, 1 run

West Boundary T. 1 S., R. 17 W., S. B. N.

80.00
78.60
74.10
68.00
66.00
64.50
62.75
60.00
42.27
40.00
39.84
17.65
16.50
4.00
2.26

Var. 14°30' East

W. Boundary T. 1 S R 17 W. S. B. M.

South on a true line, bet. Secs. 13 & 18.

Ascend

Top of spur bears E. and W. and

Descend,

Cross head of gulch, course E. and

Ascend

Top of spur, bears E. and W. and

Descend

Tapt's house bears W 197 lks. dist.

Cross road to Tapt's house bears E. and W.

Cross Malibu creek 50 lks. wide, course S 88° E and ascend

Cross road bears N. E. and S. W. on top of low spur, bears N. E. and

S. W. and descend

Cross gulch 8 lks. wide, course N. E. and

Ascend

Set a sandstone 26x10x8 ins. 19 ins. in the ground for 7 sec. cor.,

marked 7 on W. face, from which bears

A live oak 18 ins. dia. S 72° W

6 lks. dist, marked 7 S. B. T.

A live oak, 18 ins. dia. N 76° W

35 lks. dist, marked 7 S. B. T.

A sandstone boulder 16x16x12 ft. on line

Top of spur bears E. and W. and

Descend

Cross gulch 4 lks. wide, course N 25° E, and ascend

Top of ridge bears N. E. and S. W. and

Descend

Set a sandstone 33x12x8 ins. 24 ins. in the ground for cor. to

Secs. 13, 18, 19 and 24 marked with 3 notches on N. and S. edges and

raised a stone mound along side.

Plts impracticable.

Land broken and mountainous.

Soil 3rd. rate.

Scattering oak and sycamore timber, and dense undergrowth of

chaparral.

Oct. 24, 1895.

South on a true line bet. Secs. 19 and 24.

Var. 14°30' East

Descend

To base of perpendicular cliff, impossible to chain. I offset W 20

lks; thence S 100 lks; thence E 20 lks. to true line counting distances

from cor. to Secs. 13, 18, 19 and 24.

Cross gulch 4 lks. wide, course N. and

Ascend.

4.00

8.92

13.00

25.00

25.10

31.61

37.25

38.26

40.00

48.96

60.00

64.00

79.50

80.00

2.25

6.50

W. Boundary T 1 S, R. 17 W, S. B. M.

12.00	To base of perpendicular cliff, 60 ft. high. To avoid same I offset 80 lks; thence S 50 lks; thence 780 lks. to true line, counting distances from cor. to Secs. 13, 18, 19 & 24.
15.00	Top of ridge bears N 60° E and S 60° W and descend
31.30	Cross ravine, 10 lks. wide, course E. and ascend
40.00	Set a sandstone, 28x14x8 ins., 21 ins. in the ground for $\frac{1}{2}$ sec. cor. marked $\frac{1}{2}$ on W. face and raised a stone mound along side. Pits impracticable. From which bears:-
40.20	A sandstone boulder 11x5x3 ft., N 65° W 9 lks. dist. Top of spur bears N. W. and S. E. and descend
46.22	Cross gulch 4 lks. wide, course S 65° E and ascend;
50.50	Top of spur bears E. and W. and ascend
57.48	Cross gulch 6 lks. wide, course E. and ascend
66.00	Top of spur bears N 60° E and S 60° W and descend
70.04	Cross gulch 3 lks. wide, course E. and ascend
76.00	Top of spur, bears E. and W. and descend
77.00	To base of perpendicular bluff, impossible to chain. To avoid same, I offset W 15 lks; thence S 100 lks; thence N 15 lks. to true line, counting distances from cor. to Secs: 13, 18, 19 & 24.
78.10	Cross gulch 4 lks. wide, course E. and descend.
80.00	Set a sandstone 26x14x10 ins., 19 ins. in the ground for cor. to Secs. 19, 24, 25 and 30 marked with 4 notches on N. and 2 notches of S. edges, and raised a stone mound along side. Pits impracticable. Land broken and mountainous. All 3rd. rate. Scattering oak timber and dense undergrowth of chaparral.

Oct. 25th. 1895

South on a true line bet. Secs. 25 and 30. Va 14°30' East

50.	Top of spur, bears E. and W. and descend
3.00	Cross gulch 6 lks. wide, course N. E. and ascend
19.50	Top of ridge, bears N 60° W and S 60° E and descend
23.25	Cross gulch 4 lks. wide, course E. and ascend
25.50	Top of ridge bears E. and W. and descend
40.00	Set a sandstone 28x12x10 ins., 21 ins. in the ground for $\frac{1}{2}$ sec. cor. marked $\frac{1}{2}$ on W. face, and raised a stone mound along side. Pits impracticable.

Oct. 28th. 1895.

correct.

particularly the latitude and reversing apparatus and found them I carefully examined the adjustments of my solar compass, today, scattering oak timber and dense undergrowth of chaparral.

Soil 3rd. rate

Land mountains

its impracticable.

faces and raised a stone mound around post.

R 18 W. S 36 on W faces, with 6 notches on N. E. and W.

R 17 W. S 31 on E. and

C. C. T 1 S on N.

closing cor. to Secs. 31 and 36 marked

4 1/2 ft. long 4 ins. square, with marked stone, 12 ins. in the ground, for with a stone mound, in good English order, alongside, and set a post

S 85° 45' W from a stake set firmly in the ground, marked T. M. R. H. K.,

intersect N. boundary of rancho Topanga Millon sequit, 8.76 chs,

Cross canon 25 lks. wide, course S 15° W and ascend

Top of spur bears E. and W. and Descend

Cross gulch 4 lks. wide, course E. and Ascend

Top of low spur bears N. E. and S. W. and descend

Ascend

South on a true line bet. Secs. 31 and 36. Va. 14° 30' East

7.34
4.55
3.50
2.70
.50

Oct. 26th. 1895.

scattering oak timber and dense undergrowth of chaparral.

Soil 3rd. rate

Land mountains.

and raised a stone mound, alongside. pits impracticable.

25, 30, 31 and 36 marked with 1 notch on S. and 5 notches on N. edges

Set a sandstone 24x12x6 ins., 18 ins. in the ground for cor. to Secs.

Cross gulch 6 lks. wide, course E. and Ascend

Top of spur bears E. and W. and Descend

Cross canon 10 lks. wide, course E. and ascend

Top of low spur, bears N. E. and S. W. and descend

Cross canon 10 lks. wide, course E. and Ascend

W. boundary T 1 S, R. 17 W. S. B. M.

80.00
79.00
77.50
65.00
51.10
42.50

W.S. Green
U.S. Surveyor-General for California.

Attest my hand and Official Seal, the day and ~~year~~ date herein
above written.

this office.

the foregoing Trans-script has been correctly copied from the
original field notes, as the same remain of record and on file in

I, U.S. Surveyor General for California, do hereby certify that

San Francisco Cal., May 22, 1896.

Office of U.S. Surveyor-General.

W.S. Green
U.S. Surveyor-General for California.

Seal.

surveys they describe are hereby approved.

any corrections and explanations made, the said field notes and the
November 20th, 1884 having been critically examined, and the necess-

J.R. Glover, U.S. Deputy Surveyor, under his contract 382 dated
San Bernardino Meridian in the State of California, executed by

S. boundary lines of Twp. 2 N., R. 17 W. The E. and W. boundary lines of
Twp. 1 N., R. 17 W. and the E. and W. boundary lines of Twp. 1 S., R. 17 W.

The foregoing field notes of the surveys of the N.E. and

San Francisco, Cal., May 22, 1896

Office of U.S. Surveyor-General.

Subdivisions of T 1 S, R. 18 W., S. B. M.

Survey commenced Sept. 22nd, 1896 and executed with a Burt's Patent Improved Solar Compass, made by John Housh of San Francisco. This instrument was examined by J. C. Sala, Examiner of Instruments for the U.S. Surveyor General for California, as per Certificate No. 20, dated June 14th, 1895, see p. 14 of Supply notes of 1895. 1 S.

On the night of Sept. 21, 1896, at cor. to Secs. 1, 2, 35 and 36 on the N. boundary of T. 1 S. at 7:22 P.M. I observe Polaris approaching its eastern elongation and mark the line thus determined by a tack driven in a wooden plug set in the ~~XXXXXX~~ ground, 5.00 chs. North of my station.

On the morning of Sept. 22, 1896, at 7:00 I lay off the azimuth of Polaris 130° to the west of the line and mark the true meridian thus established by driving a tack in a plug set firmly in the ground. See p. 14 of supply notes of 1 S., 18 W.

The angle thus determined reduced by the table on page 100 of the surveying manual, gives the mean declination 14° 52' E.

Sept. 22, 1896, at 7:00 A.M., 1 m. t., I set off 34° 07' from the lat. arc at cor. to Secs. 1, 2, 35 & 36.

I commence at the cor. to Secs. 1, 2, 35 and 36, on San Bernardino base line, on the N. body of the Twp., previously described by me. Thence I run

6.50

13.00

24.50

32.52

35.00

38.00

40.00

49.00

80.00

Ascend
Top of ridge, bears E. and N., 75 ft. above cor. and descend
Gulch 8 lks. wide, course S. E., 50 ft. below ridge and ascend
Top of ridge, bears E. and W., 75 ft. above Gulch and descend
Gulch, 6 lks. wide, course S. E., 60 ft. below ridge, and ascend
Top of ridge, bears E. and W., 40 ft. above Gulch and descend
Gulch, 6 lks. wide, course S. E., 50 ft. below ridge, and ascend
Set a sandstone 20x10x8 ins., 15 ins. in the ground, for 7 sec. cor., marked 7 on W. face, dug pits 18x18x12 ins., N. & S. of stone 3 ft. dist. and raised a mound of earth 3 1/2 ft. base, 1 1/2 ft. high W. of cor.

Top of ridge, bears E. and W., and descend
Set a sandstone 26x12x10 ins., 18 ins. in the ground for cor. to Secs. 1, 2, 11 and 12, marked with 5 notches on S. and 1 notch on N. edges and pits impracticable. Land rough and mountainous.

Soil 3rd. rate, timber oak. Undergrowth oak and Chaparral.

Subdivisions of T.1 S., R.13 W., S.B.M.

Rest on a random line bet. Secs. 1 & 12.
 Set temp. $\frac{1}{2}$ sec. cor.
 Intersect E. bdy. of T. 37 lks. N of witness cor. to sec. 1, 6, 7, 12
 which is a post, 4 ins. sq., 1 ft. above ground, marked and witnessed
 as described by the surveyor general. (see p. 8 of supply notes of
 T. N. & 1 S-18 W)
 Thence I run
 N. 89° 44' W. on a true line bet. sec. 1 & 12. (see p. 8 of supply notes
 of T. N. & 1 S-18 W.)

0.40 Road, bears N. and S.
 0.48 Wire fence, bears N. and S.
 1.80 Wire fence, bears N. E. and S. W.
 7.50 Wire fence, bears N. and S.
 7.75 Creek, 30 lks. wide, course South
 Ascend

10.00 House, bears North, 2.00 chs. dist.
 36.00 Top of spur, bears S. E. and N. W., 200 ft. above road and descend
 46.18 Set an oak post 3 ft. long, 3 ins. sq., with marked stone 24 ins. in
 the ground, for $\frac{1}{2}$ sec. cor., marked $\frac{1}{2}$ on N. face, dug pits 18x18x12 ins.
 E. and W. of post, 3 ft. dist. and raised a mound of earth, $3\frac{1}{2}$ ft. base,
 1 $\frac{1}{2}$ ft. high, N. of cor.

40.48 Gulch, 8 lks. wide, course South, 140 ft. below ridge and ascend
 54.00 Top of ridge, bears N. and S., 100 ft. above gulch and descend
 61.06 Gulch, 8 lks. wide, course South, 120 ft. below ridge, and ascend
 70.00 Top of ridge, bears N. & S. and descend
 80.36 The cor. to sec. 1, 2, 11 and 12.

Land, rough and mountainous
 Soil, 2nd. and 3rd. rate
 Timber, Oak
 Undergrowth, chaparral.

S 001. E. bet. sec. 11 and 12
 Descend
 2.25 Gulch, 8 lks. wide, course S. W. and ascend
 15.50 Top of rocky point, bears S. W. and N. E. and descend
 22.50 Enter small valley, bears E. and W.
 32.10 Creek, 50 lks. wide, course N. E., 100 ft. below point.
 Leave valley, bears E. & W. and ascend
 40.00 Set an oak post, 3 ft. long, 3 ins. sq., with marked stone 24 ins. in the
 ground, for $\frac{1}{2}$ sec. cor., marked $\frac{1}{2}$ on W. face; from which
 an oak, 15 ins. diam. bears S 15° E., 82 lks. dist. marked $\frac{1}{2}$ S. B. T.