
Copied from Photographic Copies furnished by
U. S. General Land Office
Washington D. C.

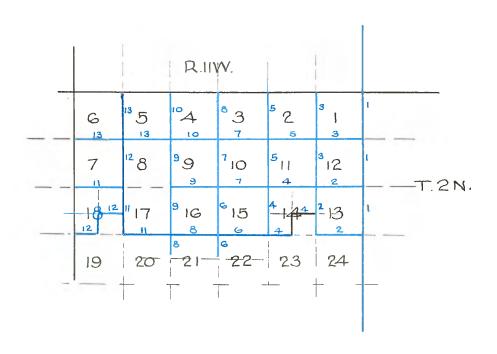

The line between Rs. 10 and 11 can only be run a short distance I therefore run South on East Boundary of Sec. 1. Va. 14-1/4° E.

Ascending. Summit of a spur course S. E. and N. W. 21.00 The ground from this point being too rough to measure directly south I offset east 5.00 chs. thence south 19.00 chs.

thence west 5.00 chs.
Set Pine post 3 x 3 in. 6 feet long in rock mound as per inst.
for 1/4 sec. cor. on east boundary of sec. 1. 40.00

Thence south Counting distance from cor. of Tps. 2 and 3 N. Rs. 10 and 11 53.50 W. cross deep gulch 30 lks. wide co. S. E. Ascend.

Summit of spur course N. W. and S. I. 77.50

Descend. Set Fir post 4 x 4 in. 3-1/2 feet long in rock mound for cor. to secs. 1-2-6-7 from which bears a Fir 2 feet dia. 8. 19-1/2° W. 29 lks. dist. 80.00 Land rough with good Pine in Canadas.

South on east boundary of sec. 12.

Cross deep gulch in canada course S. E. 20.00

Ascend. 40.00

Set Pine post 3 x 3 ins. 3-1/2 feet long in rook mound as per instructions for 1/4 sec. cor. whence bears a Pitch Pine 1 foot dia. N. 18-3/4° W. 1.05 chs. Summit of spur and descend.

Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to secs. 12-13-7 -15. 77.50 80.00 Land over high mts. good Fine and Fir timber in canadas. Soil 3rd rate.

South on east boundary of sec. 13.

Descending.
Set post 3 x 3 in. 3 feet long in rock mound for 1/4 sec. 40.00 cor. from which bears a Cottonwood 12 ins. dia. S. 10° W. 2.40 chs. Pine 2-1/2 feet dia. N.18-1/4° E. 60 lks.

Oross gulch in Canada main branch of San Cabriel Creek 42.50 course E. Ascend.

Set post 4 x 4 ins. 3-1/2 feet long in rock mound on side hill facing W. as per inst. for cor. to secs. 13-24-18-19. This is all the land in this direction valuable for timber or otherwise. I therefore do not run this line further south. Sept. 25th 1875. 80.00

| 40.00 49.50 80.00 | As only the northern portion of this Tp. can be subdivided I begin the survey from the corner to Secs. 13-24 on the east boundary of the Tp. I run on true line. West on true line between Secs. 13 and 24 Va.14-1/4° E. Along on north slope of high mountain range. Set sand rock 6 x 10 x 24 ins. in rock mound on hill side facing north as per instructions for 1/4 sec. cor. Cross dry gulch 50 lks. wide course N. E. Set post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for cor. to secs. 13-14-23 and 24. Land on north slope of high mountain range covered with low brush the ravines to the south are worthless hills, no timber some scattering timber on line. |
|-------------------------|---|
| | North between secs. 13 and 14. Va. 14-1/4 E. |
| 20.00 | Descending. Enter danada, the west fork of San Gabriel course E. |
| 22.00 | Enter canada, the west fork of San Gabriel course E. Cross creek 6 lks. wide course E. |
| 23.50 40.00 | Leave canada and ascend on ridge. Set Pine post 3 x 3 ins. in rock mound as per instructions |
| 70100 | on side hill facing south for 1/4 sec. cor. from which |
| 80.00 | bears a Pitch Pine 2 feet dia. N. 18-1/2° W. 60 lks. dist. Set post 4 x 4 ins. 3-1/2 feet long in rock mound as per |
| 00.00 | instructions on summit of ridge corner to secs. 11-12-13 |
| | and 14 from which bears a N. Pine 3 feet dia. S. 29° W. |
| | 19 lks. dist. P. Pine 1 foot dia. N. 80° E. 27 lks. dist. |
| | Land rolling. |
| | Timber, Pine, Low Oak and Cottonwood, some grazing in canadas. |
| | |
| | |
| | East on random line between secs. 12 and 13 |
| 40.00 | Set temporary 1/4 sec. cor. Va. 14-1/4° E. |
| 43.50 | Gross gulch course S. E. |
| | Ascend |
| g0.1 g | Intersect east boundary of Tp. 10 lks. south of corner to sections 12 and 13. |
| | Thence, |
| | S. 89*56' W. on true line between secs. 12 and 13 Va. 14-1/4° E. |
| 40.09 | Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as |
| | Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a Pine 3 feet dia. N. 22° E. 60 lks. dist. |
| 80.18 | The corner to sees. 11-12-13 and 14. |
| | Land rolling mountains. |
| | Soil 2nd rate. Pine and Oak timber. |
| | * ALOV COLON VAISUDA 6 |

North between secs. 11 and 12 Va. 14-1/4* E.

Ascending. Set Pine post 3 x 3 in. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears Live Oak 1 foot dia. N. 16° W. 62 lks. dist. 40.00 Descend.

Cross gulch 51 lks. wide course S. E. 51.50 Asoend.

Set Pine post 3 x 3 in. 3-1/2 feet long in large wide mound on south hill facing south over summit as per 80.00 instructions for cor. to secs. 1-2-11-12 from which bears a Fir 20 ins. dia. S. 10° W. 20 lks. dist.

N. Pine 24 ins. dia. N. 13-1/2° W. 25 lks. dist.

Land over rough mountains 2nd rate. Pine and Fir. timber.

> East on random line between secs. 1 and 12 Va. 14-1/4° E.

Descending Set temporary 1/4 sec. cor.

40.00 Cross dry gulch course S. E. ascend along south slope of 50.00 mountains.

80.26 Intersect east boundary of To. 21 lks. north of cor. to secs. 1 and 12

Thence, N. 89°51' %. on true line between secs. 1 and 12

Va. 14-1/4° E.
Set Pine post 3 x 3 ins. 3 feet in rock mound for 1/4 section 40.13 corner as per instructions from which bears a Pitch Pine

12 in. dia. N. 22° W. 17 lks. dist. The corner to secs. 1-2-11 and 12. 80.26 Land very rough with good Pine timber in canadas.

North on random line between secs. 1 and 2

Va. 14-1/4° E. Summit of high ridge main divide between the waters of the Tajunga and those flowing in the San Gabriel course S. W. 2.50 and N. E. Descend.

Set temporary 1/4 section corner. 40.00

44.00 Cross near head of Tajunga creek course N. W. Ascend.

74.00

Summit of high ridge course N. W. and S. E. Intersect north boundary of Tp. 24 lks. west of corner to 79.45 sections 1 and 2 from this corner I run 8. 10° W. on true line between sections 1 and 2

va. 14-1/4° E. Set Spruce post 3 x 3 ins. 3 feet long in large rock mound as per instructions for 1/4 section corner from which bears white Pine 3 feet dia. N. 80° W. 1.05 chs. dist. The corner to sections 1-2-11 and 12. 39.45

79.45 Land rough mostly 1st rate.

Pine and Spruce.

The line between sections 14 and 23 is very rough I therefore begin at the 1/4 section corner between sections 13 and 14 and run West on true line through section 14. Va. 14-1/4° E.

Set Spruce post 3 x 3 ins. 3 feet long in earth mound and pits on east side of deep canada as per instructions for 40.00 center of section 14. Thence,
South on 1/4 section line through center of section 14.
Va. 14-1/ Va. 14-1/4° E.

Cross gulch 50 lks. wide course S. E. Cross west fork of San Gabriel River 6 lks. wide course E. 11.00 21.50 Ascend.

Set Pine post 3 x 3 ins. 3 feet long on high abrupt bluff in rock mound as per instructions on west side of deep canada for 1/4 section corner between sections 14 and 23 from which bears a Fir 20 ins. dia. N. 60° W. 29 lks. dist. West between sections 14 and 23.

Va. 14-1/4° E. 40.00

Along north slope of mountains.
Set Oak post 4 x 4 ins. 3-1/2 feet long in rock mound near foot of high abrupt mountains as per instructions for corner to sections 14-15-22 and 23 from which bears a Live Oak 14 ins. dia. N. 27-1/2° E. 29 lks. dist.
Land very rough mountains with good Pine timber in canadas 40.00 and scattered over the mountains.

North between sections 14 and 15.

Descending.

Cross dry gulch 50 lks. wide. Cross creek .06 chs. wide the west fork of the San Gabriel 8.50 29.00 course east. Ascend.

Set mound post 3 x 3 in. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner. 40.00

Center of deep gulch course S. E. not a suitable place to build a monument I set an Oak post 3 x 3 ins. 3 feet long in rock mound 2.50 chs. W. as per instructions for witness to corner to sections 10-11-14 and 15. 80.00 Land very rough, timber scattering Pine, Fir and Oak.

> From the true corner I run East on random line between sections 11 and 14 Va. 14-1/4° E.

22.00 Leave guloh and ascend. Summit of spur course N. W. and S. E. Set temporary 1/4 section post. Oross gulch 1.02 chs. wide course S. W.

40.00 50.50

Ascend. Intersect N. and S. line 21 lks. south of corner to sections 11-12-13 and 14 from which corner I run 79.78 S. 89°51' W. on true line between sections 14 and 11 Va. 14-1/4° E.

Set Pine post 3 x 3 ins. 3 feet long in rock mound as per instructions for 1/4 section corner from which bears a N. Pine 4 feet dia. E. 21° E. 1.05 chs. dist. The corner to sections 10-11-14-15. 39.89 79.78 Land very rough, scattering Pine and Fir, low brush, Redwood and Chemisal. North between sections 10 and 11.
Va. 14-1/4° E. 2.50

Witness post and ascend.

Set Fir post 3 x 3 ins. 3 feet long in rock mound as per instructions for 1/4 section corner from which bears a Fir 14 ins. dia. 8. 80-1/2° W. 96 lks. dist.

53.50

80.00

14 ins. dia. S. SO-1/2° W. 96 IKS. dist.
Summit of high timbered ridge course N. E. and S. W. divide
between the water of the Tajunga and San Gabriel Creeks
Descend timbered hills.
Set Pine post 4 x 4 ins. 3-1/2 feet long in earth mound and
pits as per instructions for corner to sections 2-3-10-11
from which bears a N. Pine 4 feet dia. N. 20° W. 1.06 chs. dist.
N. Pine 2 feet dia. N. 35° E. 25 chs. dist.
Land high mountains, mostly lst rate. Pine timber. land high mountains, mostly 1st rate. Pine timber.

East on random line between sections 2 and 11 Va. 14-1/4° E.

Along north boundary of timbered mountains. 40.00 Set temporary 1/4 section corner.

75.50 Summit of divide between waters of the Tajunga and the San

Cabriel River course S. W. and N. E. Intersect N. and S. line 10 lks. north of corner to sections 1-2-11 and 12 from this corner I rum 80.00 N. 89°56' W. on true line between sections & and 11

Va 14-1/4° E. Set Pine post 3 x 3 ins. 3 feet long in rock mound as per instructions for 1/4 section corner from which bears Pitch Pine 12 ins. dia. N. 17-1/2° W. 27 lks. dist. N. Pine 24 in. dia. S. 27-3/4° W. 1.06 chs. dist. The corner to sections 2-3-10 and 11. 40.00

80.00 Land very rough 1st rate. Pine.

> North on random line between sections 2 and 3.
> Va. 14-1/4° E. Descending.

Cross branch of Arroyo Tajunga 25 lks. wide course S. W. 6.00 Cross an old trail course N. E. and S. W. 6.50 Ascend.

40.00 Set temporary 1/4 section corner.

57:50 77:25 Summit of high bald mountain covered with lat rate Pine.

Small spring 1.00 ch. E. of line. Intersect north boundary at the post corner to sections 2 and 3 from this corner I run

South on true line between sections 2 and 3. Va. 14-1/4° E. Set Oak post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner on side hill facing S. The corner to sections 2-3-10 and 11.

Land over high mountains N. 1/2 lst rate.

Pine S. 1/2 worthless covered with low brush. 39.75 79.75

Sept. 28th 1875.

From corner to sections 14-15-22 and 23 I run West on true line between sections 15 and 22 Va. 14-1/4° E.

Cross guloh 50 lks. wide course N. E.
Set post 3 x 3 in. 3-1/2 feet long in rock mound as per
instructions for 1/4 section corner from which bears a
N. Pine 3 feet dia. N. 49° N. 27 lks. dist.
Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound for
corner to sections 15-16-21 and 22. 12.00

80.00 Land along north slope of mountains 2nd rate. Timber.

South between sections 21 and 22.

Set Pine post 3 x 3 ins. 3-1/2 feet long in earth mound and 40.00 pits as per instructions on steep side hill facing N. E. for 1/4 section corner. Timber 2nd and 3rd rate.

> Being unable to proceed further on this line I return to corner to sections 15-16-21 and 22.
>
> West between sections 15 and 16 Va. 14-1/4° E.

Descending. Cross creek .06 chs. wide branch of the San Gabriel course S. E. 7.50 Ascend.

Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner on summit of spar course 40.00 E. and W. Descend.

Cross gulch 1.00 chs. wide course S. E. 64.50 Ascend.

Set Pine post 4 x 4 ins. 3-1/2 feet in large rock mound as 80.00 per instructions for corner to sections 9-10-15 and 16. Land very rough. Timber scattering Pine and Fir.

| | ********************************** |
|----------------|--|
| ho 00 | East on random line between sections 10 and 15 Va. 14-1/4° E. |
| 40.00 80.20 | Set temporary 1/4 section corner. Intersect N. and S. line at true corner to sections 10-11-14 and 15 from this corner I run west on true line between sections 10 and 15 Va. 14-1/4° E. |
| 40.10 | Set Oak post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a Fir 24 ins. dia. N. 70° W. 22 lks. dist. |
| 80.20 | The corner to sections 9-10-15 and 16. Land rough, broken good Pine in places very scattering. |
| | North between sections 9 and 10. |
| 26.50 | Ascending. Summit of divide between the water of the Tajunga and the San Cabriel River course N. E. and S. W. Descend. |
| 40.00 | Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears White Pine 2 feet Dia. S. 27° W. 50 lks. dist. White Pine 3 feet dia. S. 45° E. 70 lks. dist. |
| 80.0 0 | Set Oak post 4 x 4 ins. 3 feet long in rock mound as per instructions for corner to sections 3-4-9 and 10 from which bears a Fir 24 in. dia. N. 82° W. 29 lks. dist. Land rough 2nd rate. Pine scattering. |
| | East on random line between sections 3 and 10 Va. 14-1/4° E. |
| 20.00 | Enter canada thence up canada. Oross old trail nearly E. — N. W. thence along W. side of trail on W. edge of canada. |
| 40.00 66.00 | Set post for temporary 1/4 section corner. Cross trail course N. E. and S. W. Cross gulch course S. W. in canada 5 lks. wide. |
| 68.50 80.06 | Intersect N. and S. line 21 lks. south of corner to sections 2-3-10 and 11 from this corner I run S. 89*51* W. on true line between sections 3 and 10 Va. 14-1/4* E. |
| 40.03 80.06 | Set Oak post 3 x 3 ins. 3 feet long in rock mound for 1/4 section corner as per instructions. The corner to sections 3-4-9 and 10. Land along canada good grazing. Pine. Soil 2nd rate. |

North on random line between sections 3 and 4 Va. 14-1/4° E. Descending. Enter canada course W. and S. E. 20.00 Cross old trail course W. and S. E. 21.00 Cross boundary gulch 50 lks. wide course W. Leave canada and ascend brushy side hill. Set post temporary 1/4 section corner. 22.50 23.50 40.00 Summit of spur course E. 56.50 and W. Descend. Intersect north boundary of Tp. 18 lks. E. of corner to sections 3 and 4 from which corner I run S. 08° E. on true line between sections 3 and 4 80.00 va. 14-1/4° E. Set post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner. 40.00 The corner to sections 3-4-9 and 10. 80.00 Land rough. Good scattering Pine, grazing in canadas.

Sept. 29th 1875.

From corner to sections 15-16-21 and 22 I run,

West on true line between sections 16 and 21

Va. 14-1/4° E.

Along on North slope of hills.

40.00 The point for 1/4 section falling in deep gulch course N. E. not a suitable place to build a monument. I set Oak post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions 1.50 chs. west for witness to 1/4 section corner from which bears a Fir 2 feet in dia. W. 18° E. 60 lks. distance.

79.00 Enter canada.

So.00 Set Alder post 4 x 4 ins. 3-1/2 feet long in earth mound and pits as per instructions for corner to sections 16-17-20 and 21 from which bears an Alder 6 ins. in dia. N. 18-1/2° W. 60 lks. dist.

Land along foot of high mountain scattering timber Pine, Fir

South between sections 20 and 21
Va. 14-1/4 E.

and Oak.

Ascending.

Set Redwood post 3 x 3 in. 3-1/2 feet long in earth mound in S. E. slope of hills as per instruction for 1/4 section corner. This is as far as the line can be run South as the country is too rough and worthless to survey.

Land very rough 2nd rate.

Pine scattering.

From corner to sections 16-17-20 and 21 I run,
North between sections 16 and 17 14-1/4° E. Va. 2.50 6.50 Cross creek 6 lks. wide course E. Leave canada and ascend over foot of hills. 30.00 Oross dry guloh 50 lks. wide course S. E. Ascend. Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a Norway Pine 3 feet in dia. N. 14° W. 70 lks. dist. The line here causes a deep canada too rough to measure this line further north therefore run West on 1/4 line through 40.00 section 17. Va. 14-1/4° E. 15.50 40.00 Cross dry gulch 50 lks. wide course S. E. Set Pine post 3 x 3 ins. 3-1/2 feet long for center of section 17.

North on 1/4 section line through section 17. 19.50 Edge of dry guloh course S. E. Over same and ascend. To the line between sections 8 and 17.
Set Oak post 3 x 3 ins. 3-1/2 feet long as per instructions in rock mound for 1/4 section corner from which bears a Fir 2 feet in dia. N. 71° W. 45 lks. dist.
From this corner I run, 40.00 East between sections S and 17.

Va. 14-1/4° E. Along side hill aloping S. Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions on side hill facing S. E. for corner to sections 8-9-16 and 17 from which bears a Pitch Pine 14 ins. dia. 8. 25 W. 14 lks. dist. 40.00 Pitch Pine 12 ins. in dia. N. 22° E. 30 lks. dist. Land very rough with good scattering Pine in canadas. East on random line between sections 9 and 16 Va. 14-1/4° E. 18.50 Cross guloh course S. W. and ascend. 40.00 Set temporary 1/4 section corner. 45.00 47.50 71.00 Summit of high ridge course M. and S. Descend. Cross dry gulch near head 5 lks. wide course N. E. Intersect N. and S. line 30 lks. south of the corner to sections 9-10-15 and 16 from this corner I run S. 59°47' W. on true line between sections 9 and 16 80.50 Va. 14-1/4° E. Set Pine post 3 x 3 ins. 3 feet long in large rock mound as per instructions for 1/4 section corner on side hill facing west from which bears a Norway Pine 3 feet dia. N. 60° W. 40.25

North between sections 8 and 9
Va. 14-1/4° E.

The corner to sections 8-9-16 and 17.

71 lks. dist.

80.50

Land very rough with good scattering Pine in gulches.

| 21.00 24.00 40.00 | Ascending. Summit of high spur between water of the Tajunga and San Gabriel. Descend. Set Spruce post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a Fir 24 in. dia. N. 70° W. 62 lks. dist. P. Pine 12 ins. dia. 8. 64-1/2° E. 29 lks. dist. Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 4-5-8 and 9. Land high rolling mountains. |
|--|---|
| | lst rate Pine in places very scattering. Sept. 30th 1875. |
| | East on random line between sections 4-9 Va. 14-1/4* E. |
| 22.50 40.00 60.00 80.32 | Along side hill facing N. Summit of a spur course N. and S. Descend. Set post for temporary 1/4 section corner. Oross gulch 50 lks. wide course W. Intersect N. and S. line 10 lks. south of corner to sections 3-4-9 and 10 from this corner I run S. 89°56' W. on true line between sections 4 and 9 Va. 14-1/4° E. |
| 40.16 80.32 | Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions on side hill facing N. E. for 1/4 section corner. The corner to sections 4-5-5 and 9. |
| | Land rolling with good pine scattering. |
| | North on random line between sections 4 and 5. Va. 14-1/4° E. Descending. |
| 26.50 40.00 48.50 53.50 55.00 80.12 | Oross dry gulch 50 lks. wide course N. E. Set temporary 1/4 section corner. Cross old trail in edge of canada course N. W. and S. E. Cross gulch 50 lks. wide course N. W. Leave valley. Ascend. Intersect north boundary of Tp. 19 lks. west of corner to sections 4 and 5. Thence S. Os W. on true line between sections 4 and 5. |
| 40.12 80.12 | Va. 14-1/4° E. Set Alder post 3 x 3 ins. in earth mound and pits as per instructions for 1/4 section corner. The corner to sections 4-5-8 and 9. Land rolling good scattering Pine in places 2nd rate, grazing in canadas. |

| | From corner to sections 16-17-20 and 21 I run West on true line between sections 17 and 20 Va. 14-1/4° E. |
|-------------------------|--|
| 10.00 40.00 | Enter gulch course N. 80° E. up gulch about 1.00 oh. wide. Point for 1/4 section corner falling in center of gulch I set Oak post 3 x 3 ins. 3 feet long in rock mound as per instructions 1.50 dist. north for witness to 1/4 section corner from which bears an Alder 10 in. dia. S. 20° W. 1.10 ch. dist. |
| 44.50 72.00 72.75 | Leave gulch along on N. side of same. Cross old trail course N. W. and S. E. Cross dry gulch 50 lks. wide course S. E. |
| 80.00 | Ascend. Set Oak post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 17-18-19 and 20. Land along canada good grazing 2nd rate timber Pine, Alder and Fir. |
| | The land S. is too rough and worthless to measure also the line between sections 18 and 19 I run North between sections 17 and 18. Va. 14-1/4° E. |
| 5.00 9.00 | Cross old trail in canada course N. W. and S. E. Cross gulch 50 lks. wide in ravine. Ascend. |
| 40.00 | Set post 3 x 3 ins. 3 feet long in rock mound as per instructions for 1/4 section corner. Redwood 6 ins. dia. N. 15° W. 21 lks. dist. |
| 卅.00 | Summit of spur course N. W. and S. K. Descend. |
| 80.00 | Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 7-5-17 and 18. Land rough, 2nd rate Pine and Fir. |
| | The line between sections 8 and 17 crosses deep canada too rough to survey I run West on random line between sections 7 and 18 Va. 14-1/4° E. |
| 38.00 | Along N. E. slope of ridge. Summit of high spur course N. W. and S. E. |
| 40.00 | Descend. |
| 53.00 | Set temporary 1/4 section corner. Cross trail course N. W. and S. E. Intersect west boundary of Tp. 21 lks. north of corner to sections 7 and 18 Thence N. 59°51' E. on true line between sections 7 and 18 |
| 40.20 | Va. 14-1/4° E. Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a |
| 50 .20 | Pitch Pine 12 ins. dia. N. 12° W. 21 lks. distance. The corner to sections 7-5-17 and 15. Land very rough, timber Pine and Fir scattering. |

From the 1/4 section corner between sections 17 and 18. West on true line through section 18 va. 14-1/4° E.

- 20.00 Oross trail course N. W. and S. E. Oross guloh 50 lks. wide course S. E. Ascend.
- Set post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner.

 Center of 18 from which bears a Redwood 6 ins. in dia.

 N. 12° W. 27 lks. dist. from this corner I run

 South on 1/4 section line through section 18.

 Va. 14-1/4° E. 40.00
- Cross guloh 50 lks. wide course 3. E.
 To point for 1/4 section corner falling in deep gulch course N. E. not suitable place to build monument I set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for witness to 1/4 section corner 1.00 ch. South from which bears a Pine 3 feet dia. N. 65° E. 29 lks. West on random line between sections 18 and 19 va. 14-1/4° E. dist.

Intersect west boundary of Tp. 11 lks. north of cor. to sections 18 and 19 from this corner I run 40.18 N. 89*51 E. on true line between sections 18 and 19
Va. 14-1/4 E.
To point for 1/4 section corner between sections 18 and 19.

40.15 Land very rough, good scattering Pine, Fir, Live Oak and Redwood brush.

Oct. 1st 1875.

From corner to sections 7-8-17 and 18 I run North between sections 7 and 8 Va. 14-1/4° E.

10.00

Oross gulch 1.00 ch. wide course S. E.
Set Pine post 3 x 3 ins. 3-1/2 feet long in rock mound
as per instructions for 1/4 section corner from which
bears a N. Pine 3 feet dis. N. 45° E. 70 lks. dist.
Summit of main divide between waters of Tajunga and San 40.00

57.00 Cabriel Rivers course E. and W. Ruins of old house bears S. 75° W. 25.00 chs. dist.

Descend.

Cross trail course N. E. and S. W. Set Pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 5-6-7 and 8. Land let rate. Pine along ridge scattered on hill side.

| | East on random line between sections 5 and 8. |
|-------------------------|--|
| 12.00 | Cross trail on summit of spur course N. E. and S. W. Descend. |
| 34.50 | Cross gulch course N. E. |
| 40.00 | Ascend. Set temporary 1/4 section corner in center of gulch course N. W. |
| 79.90 | Intersect N. and S. line 21 lks. north of corner to sections 4-5-8 and 9 from this corner I run N. 59*51' W. on true line between sections 5 and 8. Va. 14-1/4* E. |
| 39.95 | Set post 3 x 3 ins. 3 feet long in earth mound and pits as per instructions for 1/4 section corner from which bears a Fir 20 ins. dia. N. 25° W. 62 lks. dist. |
| 79.90 | The corner to sections 5-6-7 and 8. Land very rough, scattering Pine and Fir. |
| | West on random line between sections 6 and 7. Va. 14-1/2° E. |
| 7.50 | Oross gulch 50 lks. wide course N. E. Ascend. |
| 20.00 | Summit of spur course N. and S. Descend. |
| 40.00 | Set temporary 1/4 section corner in center of gulch course N. W. |
| 80.14 | Intersect west boundary of Tp. 10 lks. S. of corner to sections 5 and 7 from this corner I run 8. 89*56 E. on true line between sections 6 and 7 Vs. 14-1/4° E. |
| 40.14 | The post for 1/4 section corner falling in deep ravine, I set Redwood post 3 x 3 ins. 3-1/2 feet long in rock mound for 1/4 section corner as per instructions 1.50 chs. east for witness to 1/4 section corner from which bears a Redwood 6 ins. dia. N. 20-1/2° W. 42 lks. dist. |
| 80.14 | The corner to sections 5-6-7 and 8. Land over rough hills, covered with low brush scattering Pine timber, 2nd rate. |
| | North on random line between sections 5 and 6 Va. 14-1/4° E. |
| 16.50 40.00 79.87 | Cross gulch 1.00 ch. wide, course N. E. Set temporary 1/4 section corner. Intersect north boundary of Tp. at post corner to sections 5 and 6 from this corner I run, South on true line between sections 5 and 6 Va. 14-1/4° E. |
| 39.87 | Set post 3 x 3 ins. 3-1/2 feet long in earth mound and pits as per instructions for 1/4 section corner. |
| 79.87 | The corner to sections 5-6-7 and 8. Land rough, 2nd rate, Pine, Fir and Redwood. |
| | Oct. 2nd 1875. |

This is all the land in this Tp. worth subdividing.

General Description

There is a fair proportion of timber in this Tp. chiefly in the canadas and along the high range of mountains between waters of the Tajunga and San Cabriel Rivers.

There is some good grazing in canadas and the land is chiefly valuable for timber.

The country is especially rough and expensive to build

water is scarce except in the main branches of the

Tajunga and San Cabriel Rivers. ****************