


Copied from Photographic Copies
furnished by
U.S. General Land Office,
WASHINGTON, D. C.

Red lines run by J. R. Glover - 1895

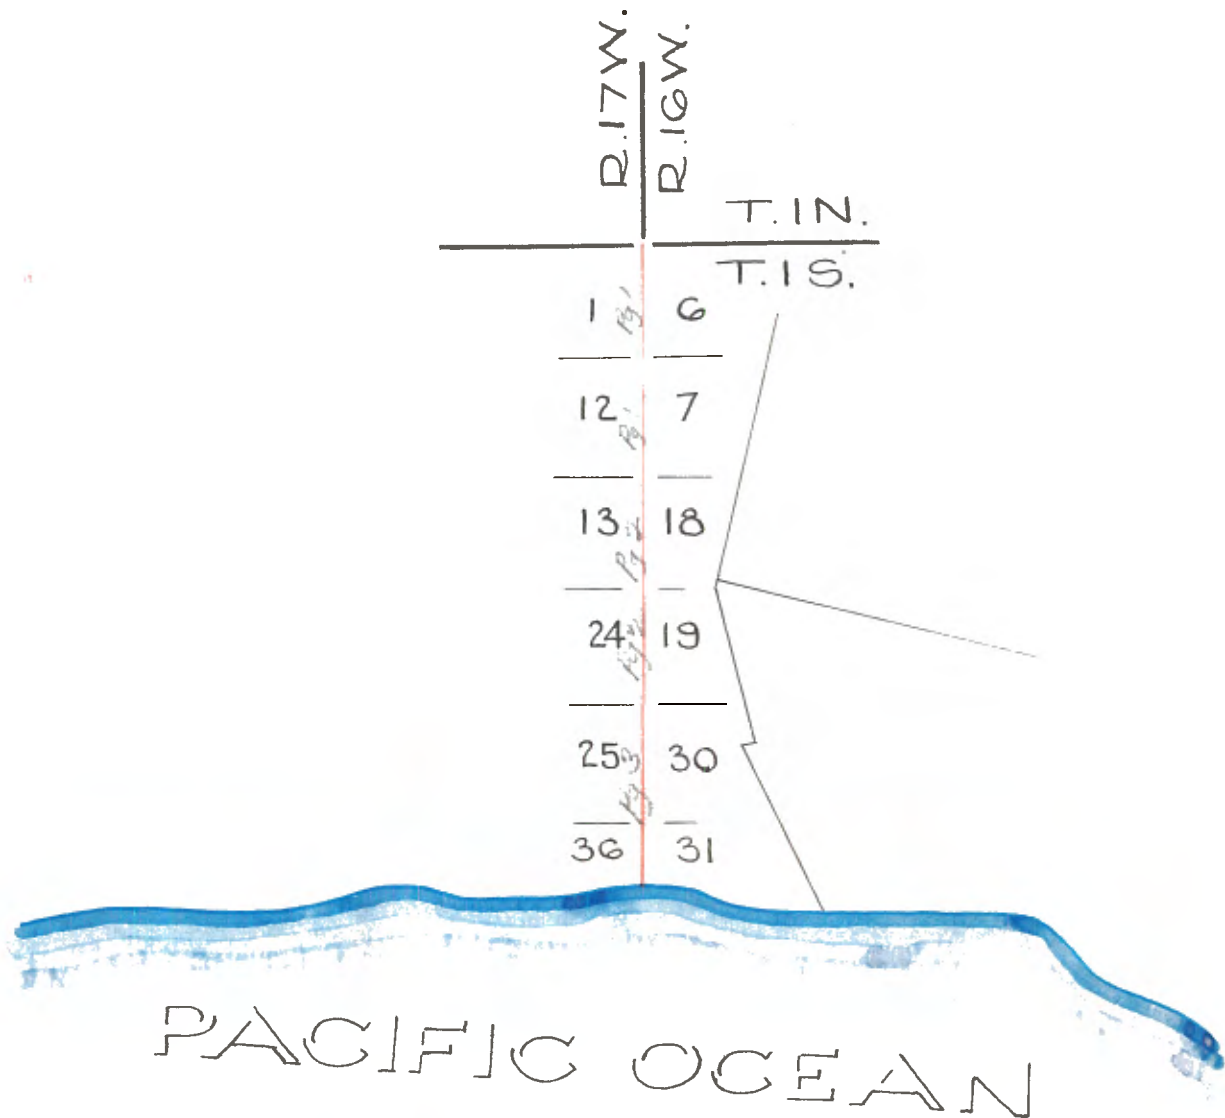

EAST BOUNDARY, TOWNSHIP 1 SOUTH, RANGE 17 WEST,
S. B. M.

CHAINS

From the cor. to Tps. 1 N., and 1 S., Ra. 16 and 17 W. on San Bernardino base line, previously set by me,
I run,
South on a true line between Secs. 1 and 6, Va. $14^{\circ}30'$ East.
Descend

- 16.70 Cross gulch 8 lks. wide, course $S.40^{\circ} W.$ and ascend.
19.00 Top of spur, bears E. and W. and descend.
20.60 Cross head of gulch, course W. and ascend.
24.50 Top of spur, bears E. and W. and descend.
26.10 Cross gulch 4 lks. wide, course W. and ascend.
28.50 Top of spur bears E. and W. and descend.
38.08 Cross gulch 5 lks. wide, course W. and ascend.
40.00 Set a sandstone 26 x 16 x 4 ins. 19 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W. face, dug pits 18 x 18 x 12 ins N. and S. of stone, $5\frac{1}{2}$ ft. dist. and raised an earth mound $1\frac{1}{2}$ ft. high, $3\frac{1}{2}$ ft. base alongside.
- 43.50 Top of spur bears E. and W., from which
A house bears $S.42\frac{1}{2}^{\circ} W.$
Descend
- 47.04 Cross gulch, 8 lks. wide, course W. and ascend.
50.00 Top of spur, bears N.W. and S.E. and descend.
50.50 The same house bears $N.64^{\circ} W.$
53.20 Cross trail bears N.W. and S.E.
55.40 Cross creek, 10 lks. wide, course $S.20^{\circ} E.$ and ascend.
70.00 Top of ridge bears N.W. and S.E. and descend.
80.00 Set a sandstone 30 x 16 x 12 ins. 22 ins. in the ground for cor. to

Secs. 1, 6, 7, and 12, marked with 1 notch on N and 5 notches on S. edges, dug pits 18 x 18 x 12 ins. in each sec $5\frac{1}{2}$ ft. dist. and raised an earth mound, $1\frac{1}{2}$ ft. high, $3\frac{1}{2}$ ft. base alongside.
Land mountainous.

Soil 3rd rate.

Scattering oak and sycamore timbers, and dense undergrowth of chaparral.
October 7th, 1895.

South, on a true line bet. Secs. 7 and 12, Var. $14^{\circ} 30'$ East.
Descend.

- 4.40 Cross gulch 6 lks. wide, course E. and ascend.
6.50 Top of spur, bears E. and W. and descend.
15.25 Cross gulch 10 lks. wide, course E. and Ascend.
20.00 Top of spur, bears E. and W. and descend.
22.60 Cross gulch, 6 lks. wide, course E. and ascend.
27.50 Top of ridge, bears E. and W. and descend.
32.50 Cross gulch 6 lks. wide, course E. and ascend.
38.50 Top of spur bears E. and W. and descend.
40.00 Set a sandstone 22 x 16 x 15 ins. 16 ins. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W. face, from which bears,
A live oak, 16 ins. dia. $S.41\frac{1}{2}^{\circ} E.$ 70 lks. dist., marked $\frac{1}{4}$ S.B.T.
A live oak, 6 ins. dia. $S.64\frac{1}{2}^{\circ} W.$ 18 lks. dist., marked $\frac{1}{4}$ S.B.T.
- 42.50 Cross low sag, bears E. and W. and ascend.
47.50 Cross road on top of spur bears N.W. and S.E. and descend.
53.74 Cross wire fence, bears N.E. and S.W.
63.12 Cross Topango Creek, 30 lks. wide, course $S.15^{\circ} E.$ and enter Canon bears N.W. and S.E.
- 64.40 Cross road bears N.W. and S.E.
65.00 Leave canon, bears N.W. and S.E. and ascend.
78.95 Cross road, bears N.E. and S.W.
80.00 Set a sandstone 30 x 12 x 10 ins. 22 ins. in the ground for cor. to secs 7, 12, 13 and 18, marked with 2 notches on N. and 4 notches on S. edges, from which bears
A live oak, 16 ins. dia. $S.32\frac{1}{2}^{\circ} E.$ 48 lks. dist., marked,

EAST BOUNDARY, TOWNSHIP 1 SOUTH, RANGE 17 WEST,
S. B. M.

T.1 S., R.16 W., S.18, B.T.
A live oak, 12 ins. dia. S $11\frac{1}{2}^{\circ}$ W. 45 lks. dist., marked,
T.1 S., R.14 W., S. 13, B.T.
No other tree within limits, raised a stone mound alongside corner
stone. Pits impracticable.
Land mountainous.
Soil 3rd rate.
Scattering oak and sycamore timbers, and dense undergrowth of
chaparral.

October 8th, 1895.

South, on a true line bet. Secs. 13 and 18, Var. $14^{\circ}42'$ East.
Ascend.
1.10 Top of low spur bears N.E. and S.W. and descend.
2.45 Cross canon, 12 lks. wide, course N. 50° E. and Ascend.
17.50 Enter dense brush, bears E. and W.
33.00 Top of ridge, bears E. and W. and descend.
40.00 Set a sandstone, 22 x 20 x 6 ins. 16 ins. in the ground for $\frac{1}{4}$ sec.
cor. marked $\frac{1}{4}$ on W. face and raised a stone mound alongside. Pits im-
practicable.
54.41 Cross canon, 12 lks. wide, course N 40° E. and ascend.
62.50 Top of ridge, bears E. and W. and descend.
71.18 Cross gulch, 9 lks. wide, course E. and ascend.
75.00 Cross road bears N.E. and S.W.
80.00 Set a sandstone, 20 x 12 x 5 ins. 15 ins. in the ground for cor. to
Secs. 13, 18, 19, and 24, marked with 3 notches on N. and S. edges from
which bears,
A live oak, 12 ins. dia. N. $7\frac{1}{2}^{\circ}$ E. 91 lks. dist., marked T.1 S., R.16 W.
S.18 B.T.
A live oak, 30 ins. dia. S. $40\frac{1}{2}^{\circ}$ E. 122 lks. dist., marked T.1 S., R.16 W.
S.19 B.T.
No other tree within limits, dug pits 18 x 18 x 12 ins. in Secs. 13 and
24, $5\frac{1}{2}$ ft. dist. and raised an earth mound 2 ft high, $4\frac{1}{2}$ ft. base along
side corner stone.
Land mountainous.
Soil 3rd rate.
Scattering oak and sycamore timber, and dense undergrowth of chaparral.
October 9th, 1895.

South on a true line, bet Secs. 19 and 24, Var. $14^{\circ}42'$ East
Ascend.
2.00 Top of low spur bears E. and W. and descend. 528
3.71 Cross Canon, 10 lks. wide, course E. and Ascend. 6
29.00 Top of ridge, bears E. and W. and descend. 68
34.72 Cross gulch, 8 lks. wide, course S.E. and ascend.
39.00 Top of spur, bears E. and W. and descend.
40.00 Set a sandstone 34 x 20 x 12 ins. in a stone mound for $\frac{1}{4}$ sec. cor.
marked $\frac{1}{4}$ on W. face. Too rocky to set in the ground. Pits imprac-
ticable.
41.27 Cross gulch, 7 lks. wide, course South 80° E. and ascend.
51.00 Top of spur, bears E. and W. and descend
77.00 Cross canon 14 lks. wide, Course E. and ascend.
77.90 Cross road, bears E. and W.
80.00 Set a sandstone 18 x 12 x 6 ins. 12 ins. in the ground for cor. to Secs.
19, 24, 25 and 30, marked with 4 notches on N. and 2 notches on S. edges
and raised a stone mound alongside. Pits impracticable.
Land mountainous.
Soil 3rd rate.
Scattering oak timber and dense undergrowth of chaparral.
October 10th, 1895.

EAST BOUNDARY, TOWNSHIP 1 SOUTH, RANGE 17 WEST,
S. B. M.

CHAINS South on a true line bet. Secs. 25 and 30,
Var 14° 33' East
Ascend.

7.75 Top of spur, bears E. and W. and
Descend.

10.06 Cross gulch, 2 lks. wide, course E. and W. and Descend.

17.50 Top of spur, bears E. and W. and Descend.

21.00 Cross gulch, 4 lks. wide, course E. and Ascend.

28.00 Top of spur, bears E. and W. and descend.

37.40 Cross gulch, 4 lks. wide, course S.W. and Ascend.

39.50 Top of spur, bears N.E. and S.W. and Descend.

40.00 Set a sandstone 22 x 12 x 6 ins. 16 ins. in the ground for $\frac{1}{4}$ sec. cor.,
marked $\frac{1}{4}$ on W. face, and raised a stone mound alongside. Pits imprac-
ticable.

58.75 Cross ravine, 10 lks. wide, course E. and
Ascend.

62.00 Top of spur, bears E. and W. and
Descend.

64.00 Cross gulch, 5 lks. wide, course N.E. and
Ascend.

65.10 Top of low spur, bears N.E. and S.W. and
Descend

67.20 Cross gulch, 4 lks. wide, course N.E. and
Ascend.

70.40 Top of low spur, bears N.E. and S.W. and Descend.

77.80 Cross gulch, 3 lks. wide, course N.E. and
Ascend.

80.00 Set a sandstone 28 x 14 x 10 ins. 21 ins. in the ground for cor. to
Secs. 25, 30, 31, and 36, marked with 1 notch on S. and 5 notches on
N. edges and raised a stone mound alongside.
Pits impracticable.
Land mountainous.
Soil 3rd rate.
No timber.
Dense undergrowth of chaparral.
October 11, 1895.

South, on a true line bet. Secs. 31 and 36,
Var. 14° 36' East.
Ascend.

1.90 Cross road on top of spur, bears N.W. and S.E. and descend.

13.40 Cross gulch, 2 lks. wide, course S.E. and Ascend.

24.50 Top of spur, bears N.W. and S.E. and descend abruptly.

38.95 To a point near high watermark, on the shore of the Pacific Ocean,
and set a sandstone, 36 x 18 x 9 ins. 27 ins. in the ground, for meander
cor. to fractional Secs. 31 and 36, marked M.C. on S. face, and raised a stone
mound alongside, 2 ft. high, 4 $\frac{1}{2}$ ft. base.
Pits impracticable.
Land mountainous.
Soil 3rd rate.
Dense undergrowth of chaparral.
No timber.
I carefully examined the adjustments of my solar compass today,
particularly the latitude and reversing apparatus and found them correct.
October 12th, 1895.