


7191

USE STANDARD STRENGTH PIPE EXCEPT AS NOTED.
 USE CEMENT MORTAR FOR ALL VITRIFIED CLAY PIPE JOINTS.
 ENCASE FOUR FEET OF SEWER AT POINTS OF INTERFERENCE.
 ALL STRUCTURES SHALL BE BRICK SEWER STRUCTURE 3-4-10A.
 USE STANDARD MANHOLE FRAMES AND COVERS AS PER COUNTY ROAD DEPT. REQUIREMENTS.

NO REVISIONS SHALL BE MADE IN THESE PLANS WITHOUT THE APPROVAL OF THE COUNTY ENGINEER.
 NO REPRESENTATIVE OF THE COUNTY ENGINEER WILL BE AT THE SITE OF THE WORK.
 THE OWNER OR HIS AUTHORIZED REPRESENTATIVE SHALL BE RESPONSIBLE FOR THE LOCATION OF ALL EXISTING UTILITY CONNECTIONS AND Y BRANCHES AND SHALL PROTECT THEM AT THEIR PROPER LOCATIONS WITH STATION MARKERS.
 ANY CHANGE OF LOCATION SHALL BE REQUESTED BY THE OWNER OR HIS REPRESENTATIVE.

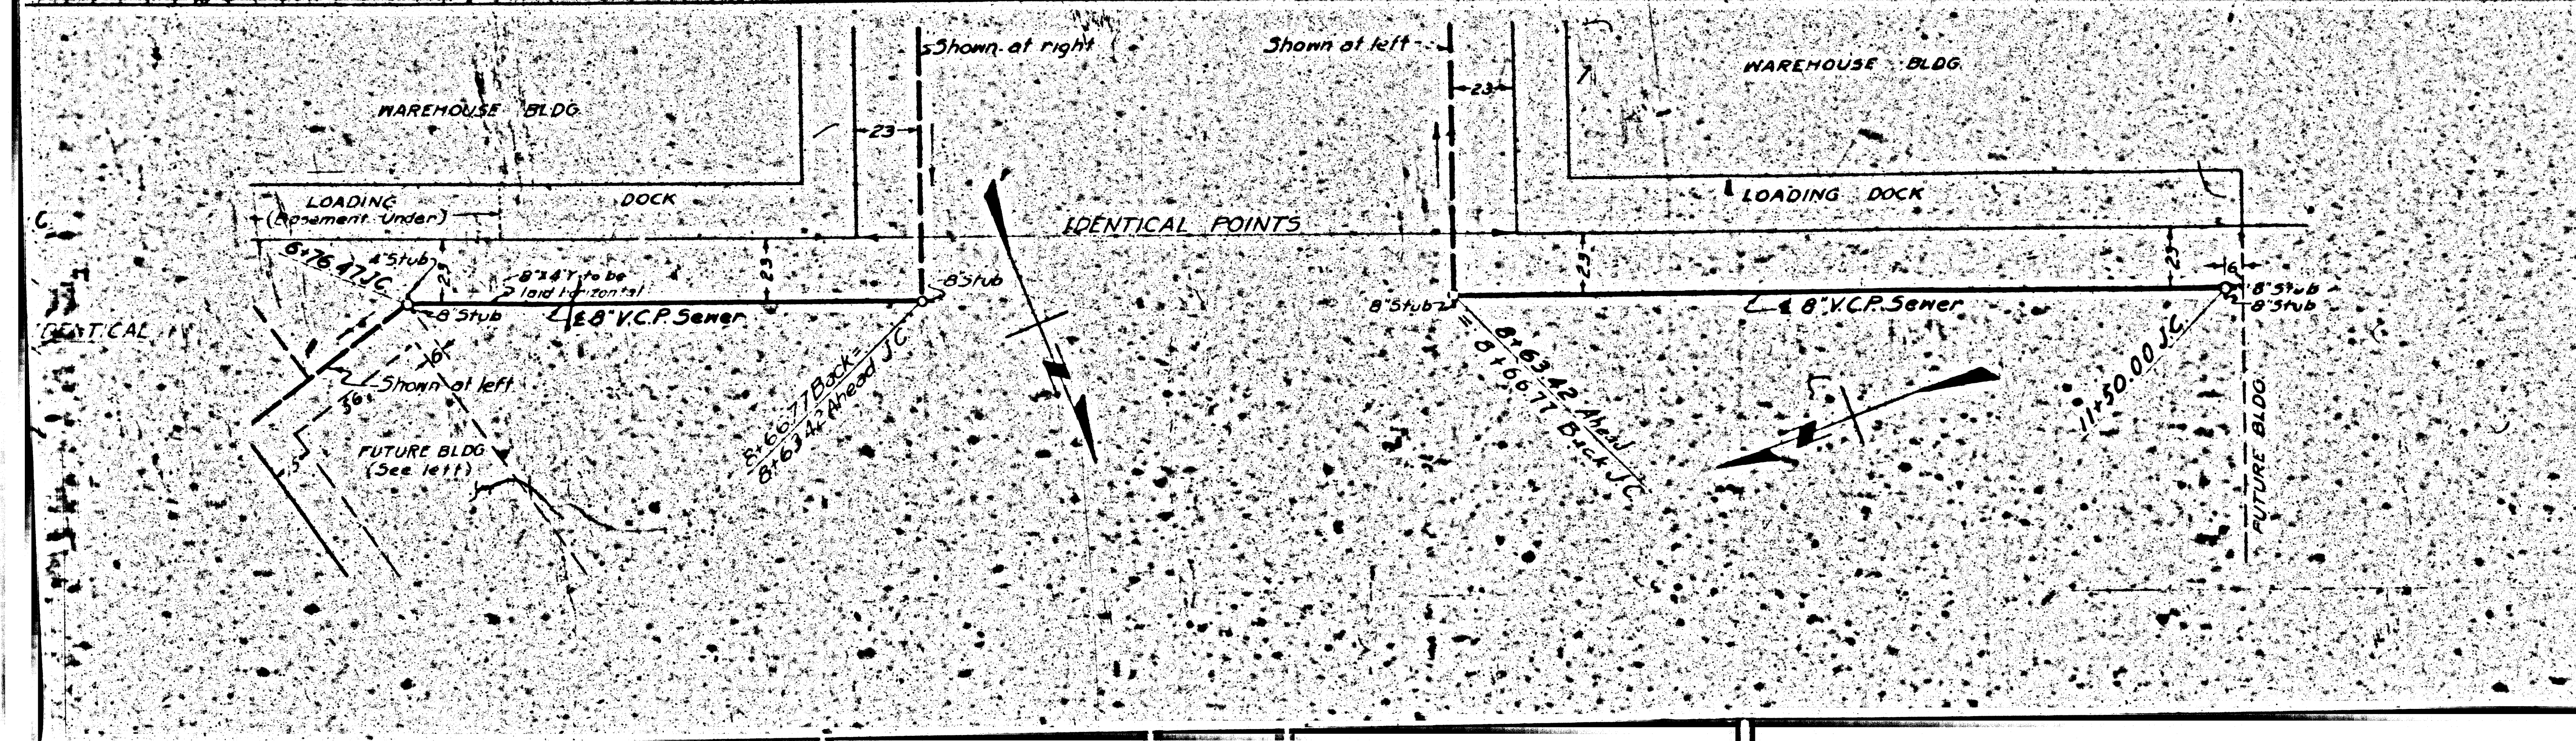

INDEX MAP
 PC No 563

PC
 563