

DOUBLE SCALE

1. Use Standard Manhole Frames and Covers, S-a-117
2. Use Extra Strength Pipe.
3. Use Cement Mortar for all Vitrified Clay Pipe Joints.
4. Resurface all trenches within paved area to meet L.A. County Road Dept. requirements.
5. Encase four feet of sewer at points of interference with poles as per S-a-119
6. House Connections to be constructed with inverts of Property Line as shown.
7. All structures shall be brick sewer structures, S-a-104

Approval of this plan by the County Engineer does not constitute a representation as to the accuracy of the location of, or the existence or non-existence of, any underground utility, pipe, or structure within the limits of this project.

Provide stakes on the Property Line or Property Line produced, at right angles to the Sewer Line, at the center line of each Manhole.

NOTE:
No representative of the County Engineer will survey or lay out any portion of the work. The owner or his authorized representative shall furnish the County Engineer with grade sheets and stakes for all house connections and all structures and shall provide stakes for these at their proper locations with the following plainly marked: Any change of location shall be reported in writing by the owner or his representative.

No revisions shall be made in these plans without approval of the County Engineer.

(12,720)

PROFILE ALIGNMENT AND GRADE OF
SANITARY SEWERS
TO BE CONSTRUCTED IN
FIRST ALLEY SOUTH OF POMONA BLVD.
BETWEEN BEVERLY BLVD. & FIRST ALLEY WEST OF ATLANTIC BLVD.

PRIVATE CONTRACT No. 1383
W.S.36
ONE SHEET

Scale: Vert 1"=4'
Horz 1"=40'

PREPARED IN THE OFFICES OF
JONES & GILBERT


FOR LEGEND
See Plan No. S-a-64



NOTE:
Grades to which this improvement is to be constructed are shown on Plans and Profiles. Grade points for top of curb, center line of streets or center line of alley are shown by circles on Profiles. At all points between designated points, the grade shall be established so as to conform to a straight line drawn between said designated points.

Locations are in feet above U.S.C.S. Datum, or Mean Sea Level.

This drawing and the data hereon are hereby made a part of the specifications. Work shall be constructed according to specifications on file in the office of the County Engineer and shall be prepared only in the presence of the County Engineer. Plans may be changed by the contractor, but shall be subject to the approval of the County Engineer. The contractor must obtain a permit to occupy the County Streets from the L.A. County Road Dept. 211 So Main St. and make a deposit with the County Engineer, 518 L.S. County Engineering Bldg., sufficient to cover the cost of Construction Inspection and Record Plans.

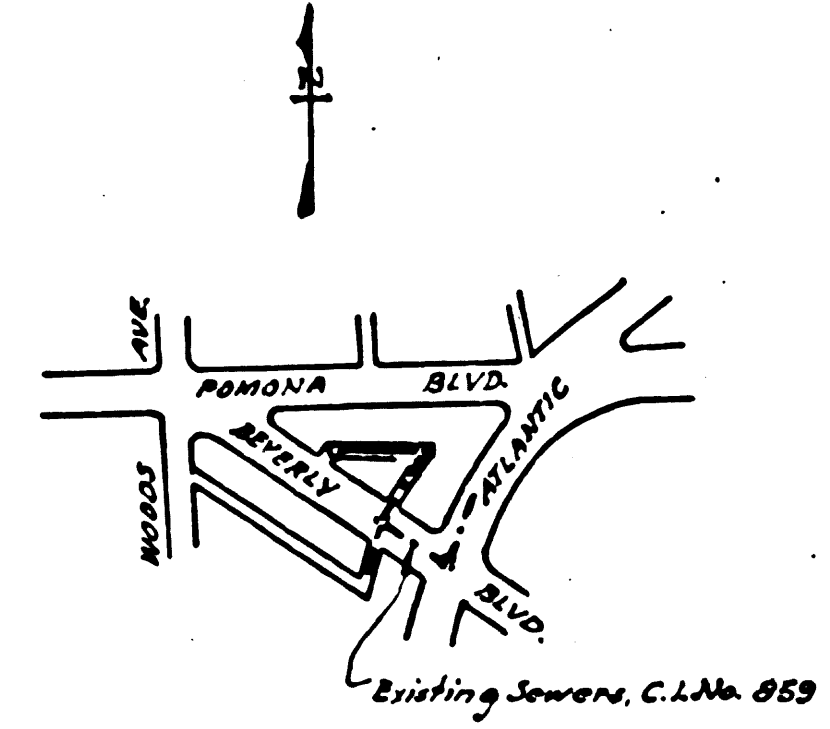

INDEX MAP
Scale: 1"=600'
J.N. 3472
P.C. No. 1383

COUNTY OF LOS ANGELES, CALIFORNIA

APPROVED *[Signature]*
County Engineer

APPROVED *[Signature]*
Chief Engineer County Sanitation District No. 2

CHECKED *[Signature]* S.P.
Office of County Engineer, P.C.E.

FIG. 1083

PC 1383