Item Line 7

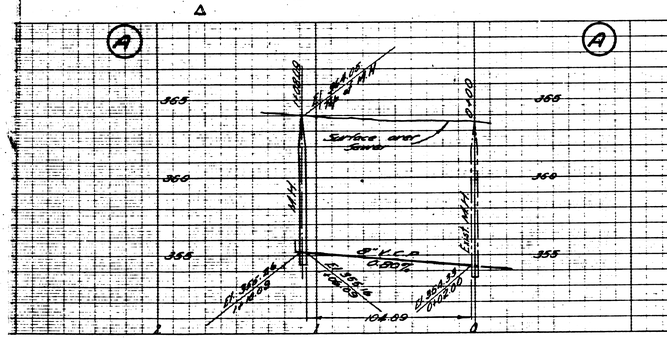

12,012

(1) Use standard manhole frame and cover, S-a-111.
(2) Use standard strength pipe.
(3) Use cement mortar for all unlined clay pipe joints.

B.M. Elev. 359.954
S.E. cor. Waverly Avenue and Broadway Avenue
L.P.T. on curb return

(4) Construct house connections with invert at property line 5 feet below curb grade.
(5) Encase first foot of sewer at points of interference with water line S-a-105.
(6) All structures shall be brick sewer structures, S-a-104.

Note:
No representative of the county engineer will survey or lay out any portion of the work.
The owner or his authorized representative shall furnish the county engineer with grade sheets and elevations of all house connections and Y branches and shall provide stakes for them, at their proper locations with cut-to-grade plainly marked. Any change in location shall be requested in writing by the owner or his representative.
No revisions shall be made on these plans without approval of the county engineer.

Note:
Check ticks on the property lines or property lines produced at right angles to the sewer line at the center line of each manhole.

PROFILE, ALIGNMENT AND GRADE OF
SANITARY SEWERS
TO BE CONSTRUCTED IN
DAINES DRIVE

1

PRIVATE CONTRACT NO 1576
W.S. 44
SHEET 1 OF 1 SHEET

SCALE: Horiz. 1"=40' Vert. 1"=4' NOVEMBER 1950

PREPARED BY: Sam W. Evans DEP. C.E. No 3137

FOR LEGEND
SEE PLAN S-a-64

Note:
Grades to which this improvement is to be constructed are shown on plans and profile. Grade points for MHs at curb, center line of street or center line of alley are shown by circles on profiles. At all points between designated points the grade shall be established so as to conform to a straight line drawn between designated points.
Elevations are in feet above U.S.C.S. datum or mean sea level.
This drawing and the data hereon are hereby made a part of the specifications. MHs shall be constructed according to specifications of the office of the County Engineer and shall be prosecuted only in the presence of the Co. Engr.
Before the work can be started the contractor must obtain a permit to encroach on County Streets from the L.A. County Eng. Dept., 211 South Main Street and make a deposit with the County Engineer, 220 L.A. County Engineering Bldg., sufficient to cover the cost of construction, inspection and incidentals.
Approval of this plan by the County of Los Angeles does not constitute a representation as to the accuracy of the location of or the existence or non-existence of any underground utility, pipe or structure within the limits of this project.

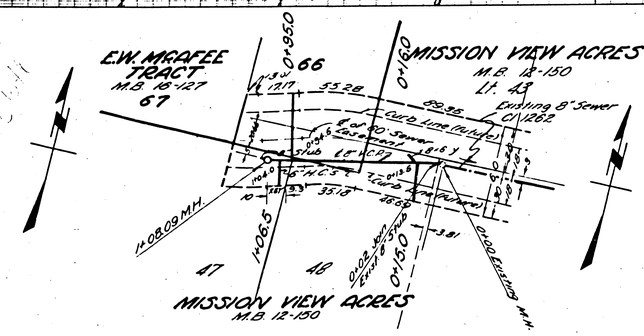



Scale 1" = 600'
PC 1576 JN 3676
INDEX MAP

Checked 1-26-51 W.E.

DEC 29 1950

COUNTY OF LOS ANGELES, CALIFORNIA

APPROVED: H. L. Sandler
COUNTY ENGINEER

APPROVED BY: Arm Rawn
CHIEF ENGINEER OF COUNTY SANITATION DISTRICT No. 12

Construction Plans Approved - Permission to use sewers withheld until easements are given to Co. of Los Angeles.
H. L. Sandler

CHECKED BY: H. L. Sandler 12-26-50
OFFICE OF COUNTY ENGINEER
REG. C.E. No 6742

BC 1576 DAINES DRIVE W.S. 44

Item Line 5