


**SAN DIMAS BUILDING DISTRICT NO. 10**

**NOTE:**  
 Provide stakes on the property lines or property lines produced at right angles to the center line of each manhole.  
 No representative of the County Engineer will survey or layout any portion of the work.  
 The owner or his authorized representative shall furnish the County Engineer with grade sheets and stations for all house laterals and Y branches and shall provide stakes for them at their proper locations with stationing plainly marked. Any change in location shall be requested in writing by the owner or his representative.  
 No revisions shall be made in these plans without the approval of the County Engineer.

1. Use standard manhole frames and covers, S-117.
2. Use standard strength pipe.
3. Use cement mortar for all vitrified clay pipe joints.
4. Resurface all trench within paved area to meet L.A. County Road Dept. or California State Highway Dept. requirements in accordance with permit.
5. Excavate four feet of cover at points of interference with poles, S-119.
6. All structures shall be brick sewer structures, S-104.
7. For allowable leakage test, see Formula No. 1, Spec's., Sec. 51.
8. Manhole tops in unimproved Right-Of-Way to be 6" above final grade.

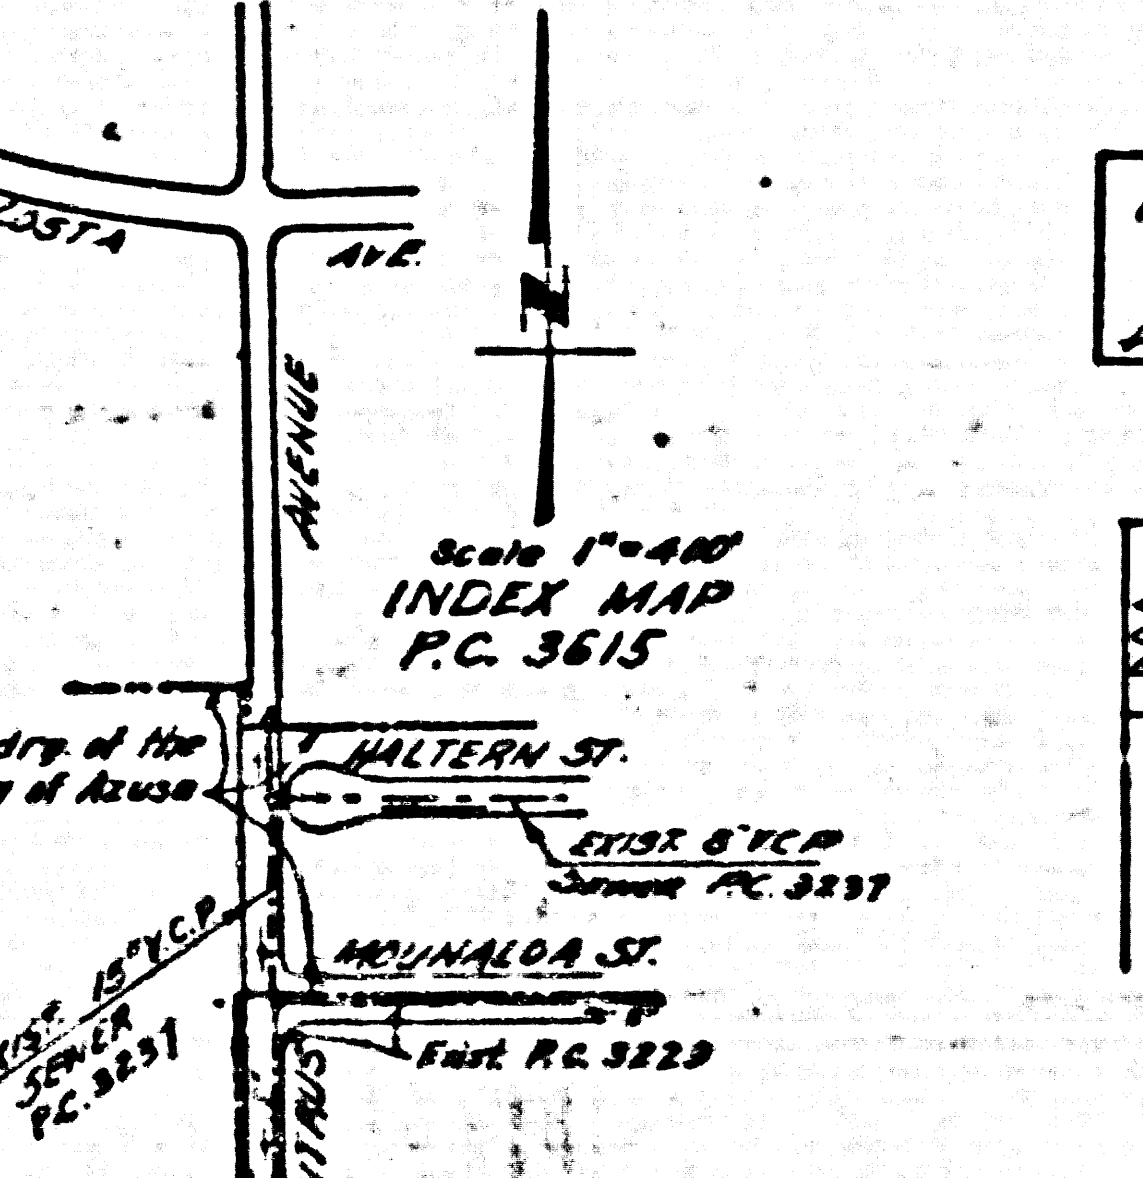

SHEETS	PAGES
1	1

**NO CHARGE FOR CONNECTIONS**  
 In Citrus 10-3-55

AM 3615-A 1128 392 30.3  
 12x12 1/2" x 12" x 12" x 12" x 12"  
 12x12 1/2" x 12" x 12" x 12" x 12"  
 12x12 1/2" x 12" x 12" x 12" x 12"

Checked 12-8-55 M. Green

**PROFILE, ALIGNMENT AND GRADE OF  
 SANITARY SEWERS  
 TO BE CONSTRUCTED IN  
 CITRUS AVENUE  
 FROM EXISTING J.C. OF P.C. 3237 AT  
 HALTERN STREET TO A POINT  
 145 FEET NORTHERLY THEREFROM**

PRIVATE CONTRACT NO. 3615  
 W. S. 47  
 1 SHEET

Scale: HORIZ. 1" = 100' VERT. 1" = 10'  
 AUGUST, 1955  
 PREPARED IN THE OFFICE OF  
**JENNINGS ENGINEERING CO.**  
 H. J. Jennings, Inc. 7154  
 FOR LEGEND SEE PLAN NO. S-64

**NOTE:**  
 Grades to which this improvement is to be constructed are shown on plans and profiles. Grade points for top of curb, center line of street, or center line of alleys are shown by circles on profiles. All of points between designated points the grade shall be established so as to conform to a straight line drawn between said designated points.  
 Elevation are in feet above U.S.C. datum or mean sea level.  
 This drawing and the data hereon are hereby made a part of the specifications.  
 Work shall be constructed according to specifications on file in the office of the County Engineer and shall be processed only in the presence of the County Engineer.  
 Before work can be started, the contractor must obtain a permit to connect to County streets from the City of Azusa Road Dept., 148 W. 2nd St., and make a deposit with the County Engineer, 148 W. 2nd St., Azusa, California, sufficient to cover the cost of construction inspection and record plans.  
 Approval of this plan by the County of Los Angeles does not constitute a representation, as to the necessity of the location of or the existence or non-existence of any underground utility, pipe or structure within the limits of this project. This note applies to all sheets.  
 If work is to be done in a State Highway, a permit must be obtained from the State of California, Division of Highways, 120 South Spring Street.

**COUNTY OF LOS ANGELES, CALIFORNIA**  
 Approved: John A. Lambie, County Engineer  
 Approved: A. M. Ryan, City Engineer  
 City of Azusa  
 Approved by: J. A. Williams, City Engineer  
 Project No. 1128  
 Date: 12-8-55

PC 3615  
 PAGE 1

21,932

CITRUS AVENUE  
 PC 3615  
 1128