


TEMPLE CITY BLDG. DIST. NO 5

NOTE:
 Provide stakes on the property lines or property lines produced at right angles to the sewer line at the center line of each manhole.
 No revisions shall be made in these plans without the approval of the County Engineer.

1. Use standard manhole frames and covers, S-a-117.
2. Use standard strength pipe except as noted.
3. Use cement mortar for all vitrified clay pipe joints.
4. Resurface all trench within paved area to meet L.A. County Road Dept. or California State Highway Dept. requirements in accordance with permit.
5. Encase four feet of sewer at points of interference with poles, S-a-119.
6. House laterals to be constructed with inverts at property line _____ feet below curb grade except as noted.
7. All structures shall be brick sewer structures, S-a-104.
8. For allowable leakage test, see Formula No. _____, Sec. 51.
9. Manhole tops in unimproved Right-Of-Way to be 4" above finish grade.

B.M. R-78, Elev. = 269.821, F.B. 1412, pg. 48
 Glendon Way (S. side), 930' ± W. of & Rue Herde Ave.
 Cut sph. in N. side P.P. # 123457-E

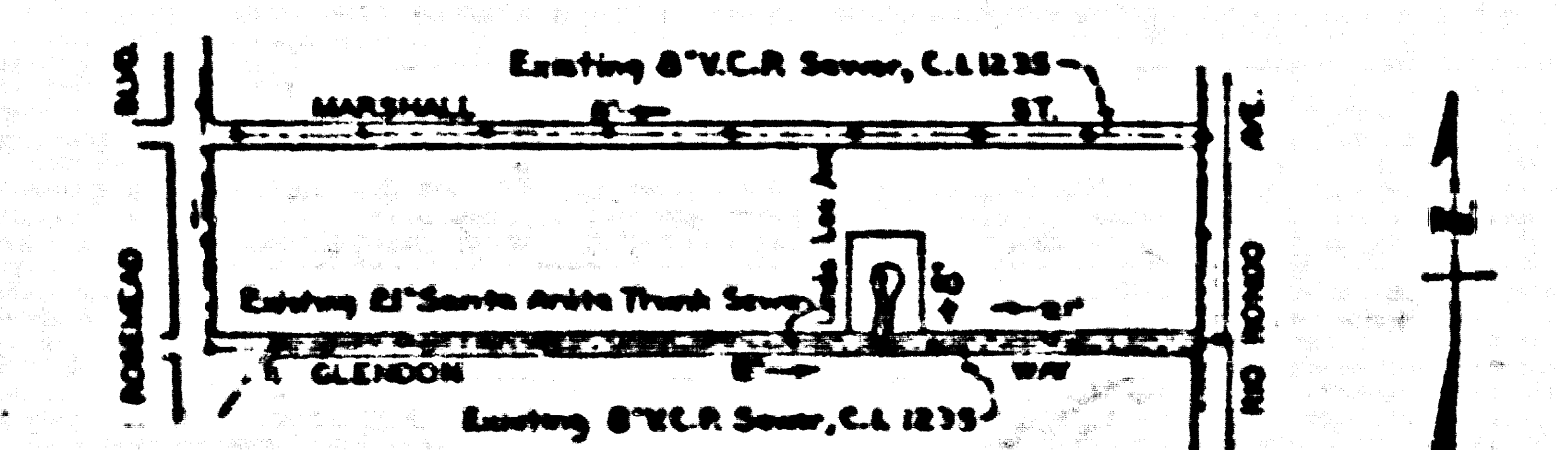

PROFILE ALIGNMENT AND GRADE OF
 SANITARY SEWERS
 TO BE CONSTRUCTED IN
 TRACT NO. 21492

PRIVATE CONTRACT NO. 3634
 W. S. 44
 1 SHEET
 AUGUST 1955

Scale: VERT. 1" = 4' HORIZ. 1" = 40'

PREPARED IN THE OFFICE OF
 CHAS. J. WILT
 No. 6 & No. 927

FOR LEGEND SEE PLAN NO. S-a-64

NOTE:
 Grades to which this improvement is to be constructed are shown on plans and profiles. Grade points for top of curb, corner line of street, or center line of alley are shown by circles on profile. As all points between designated points the grade shall be established so as to conform to a straight line drawn between said designated points.
 Elevation are in feet above U.S.C.S. datum or mean sea level.
 This drawing and the data herein are hereby made a part of the specifications.
 Work shall be constructed according to specifications on file in the office of the County Engineer and shall be prosecuted only in the presence of the County Engineer.
 Before work can be started, the contractor must obtain a permit to excavate in County streets from the L.A. County Road Dept., 108 W. 2nd St. and make a deposit with the County Engineer, 733 L.A. County Engineering Building, sufficient to cover the cost of construction inspection and record plans.
 Approval of this plan by the County of Los Angeles does not constitute a representation as to the accuracy of the location of or the existence or non-existence of any underground utility, pipe, or structure within the limits of this project. This note applies to all sheets.
 If work is to be done on a State Highway, a permit must be obtained from the State of California, Division of Highways, 120 South Spring Street.

COUNTY OF LOS ANGELES, CALIFORNIA
 Approved, William J. Fox, County Engineer Approved, A. M. Rawn
 CHAS. J. WILT
 CHAS. J. WILT
 Office of County Engineer, Box 6, P. O. No. 7860

P.C. 3634
 PAGE 1
 21,697

TRACT NO. 21492

P.C. 3634

P.C. 3634

checked 11-4-55 W. L. ...

Trim Line