


NOTE: BELLFLOWER BLDG. DIST. N° 4

- Provide stakes on the property lines or property lines produced at right angles to the sewer line at the center line of each manhole.
- No representative of the City Engineer will survey or layout any portion of the work.
- The owner or his authorized representative shall furnish the City Engineer with grade sheets and stations for all house laterals and Y branches and shall provide stakes for them at their proper locations with stationing plainly marked. Any change in location shall be requested in writing by the owner or his representative.
- No revisions shall be made in these plans without the approval of the City Engineer.
1. Use standard manhole frames and covers, S-a-117.
 2. Use standard strength pipe except as noted.
 3. Use cement mortar for all vitrified clay pipe joints.
 4. Resurface all trench within paved area to meet L.A. County Road Dept. or California State Highway Dept. requirements in accordance with permit.
 5. Encase four feet of sewer at points of interference with poles, S-a-119.
 6. House laterals to be constructed with $\frac{1}{8}$ " rise per foot to property line.
 7. All structures shall be brick sewer structures, S-a-104.
 8. For allowable leakage test, use Formula No. 1, Specs., Sec. 54.
 9. Manhole tops in unimproved Rights-Of-Way to be 6" above finish grade.
 10. The Private Engineer is to furnish the House Lateral depth at the property below the top of curb elevation for each lateral on the grade sheet.

B.M. 5793 El. 53.784
 Chis. is on Conc. headwall of
 N.E. cor. South 31st Paramount Blvd.

NO CHARGE FOR CONNECTIONS
 @ Lusk 11-19-56

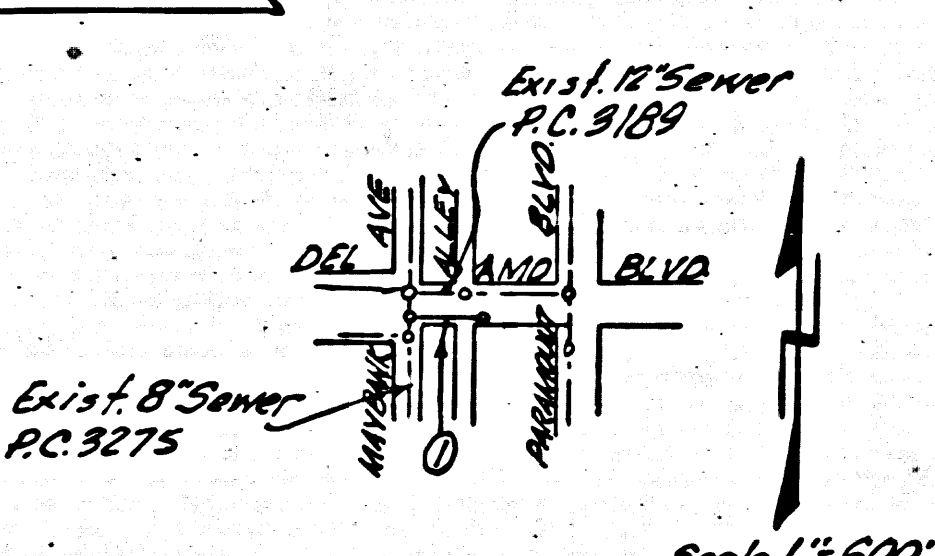

INDEX MAP
 P.C. 4203

dated 12-19-56 *W. L. ...*

PROFILE, ALIGNMENT AND GRADE OF
SANITARY SEWERS
 TO BE CONSTRUCTED IN
DEL AMO BLVD. 23,798

PRIVATE CONTRACT NO. 4203
 W. S. 30
 1 SHEET, 1 PAGE
 Scale: VERT. 1"=4'
 HORIZ. 1"=40' OCT., 1956
 PREPARED IN THE OFFICES OF
OLSON SURVEYING SERVICE

Edward A. Phillips
 Reg. C. E. No. 7820
 FOR LEGEND SEE PLAN NO. S-a-64

NOTE:
 Grades to which this improvement is to be constructed are shown on plans and profiles. Grade points for top of curbs, center line of streets, or center line of alleys are shown by circles on profiles. At all points between designated points the grade shall be established so as to conform to a straight line drawn between said designated points.
 Elevations are in feet above U.S.C. & G.S. Sea Level Datum of 1929.
 This drawing and the data hereon are hereby made a part of the specifications.
 Work shall be constructed according to specifications on file in the office of the City Engineer and shall be prosecuted only in the presence of the City Engineer.
 Before work can be started, the contractor must obtain a permit to excavate in County Streets from the L.A. County Road Dept., 181 W. 4th St., and make a deposit with the County Engineer, Room 324, Pan American Building 255 S. Broadway, sufficient to cover the cost of construction inspection fees.
 Approval of this plan by the City of Lakewood does not constitute a representation as to the accuracy of the location or the existence or non-existence of any underground utility, pipe, or structure within the limits of this project. This note applies to all sheets.
 If work is to be done in a State Highway, a permit must be obtained from the State of California, Division of Highways, 120 South Spring Street.

CITY OF LAKEWOOD, CALIFORNIA
 Approved, *John A. Lambie*, City Engineer
 Approved, *A. M. Rawm*
 CHIEF ENGINEER, SAN. DIST. NO. 3
 By *A. P. Collins*, Sanitation Engineer
 By *A. J. ...*, Office Engineer
 Checked by *P. E. ...* 11-19-56
 Office of City Engineer, Reg. C. E. No. 7860

P.C. 4203 DEL AMO BLVD.

Issue 80-0-23