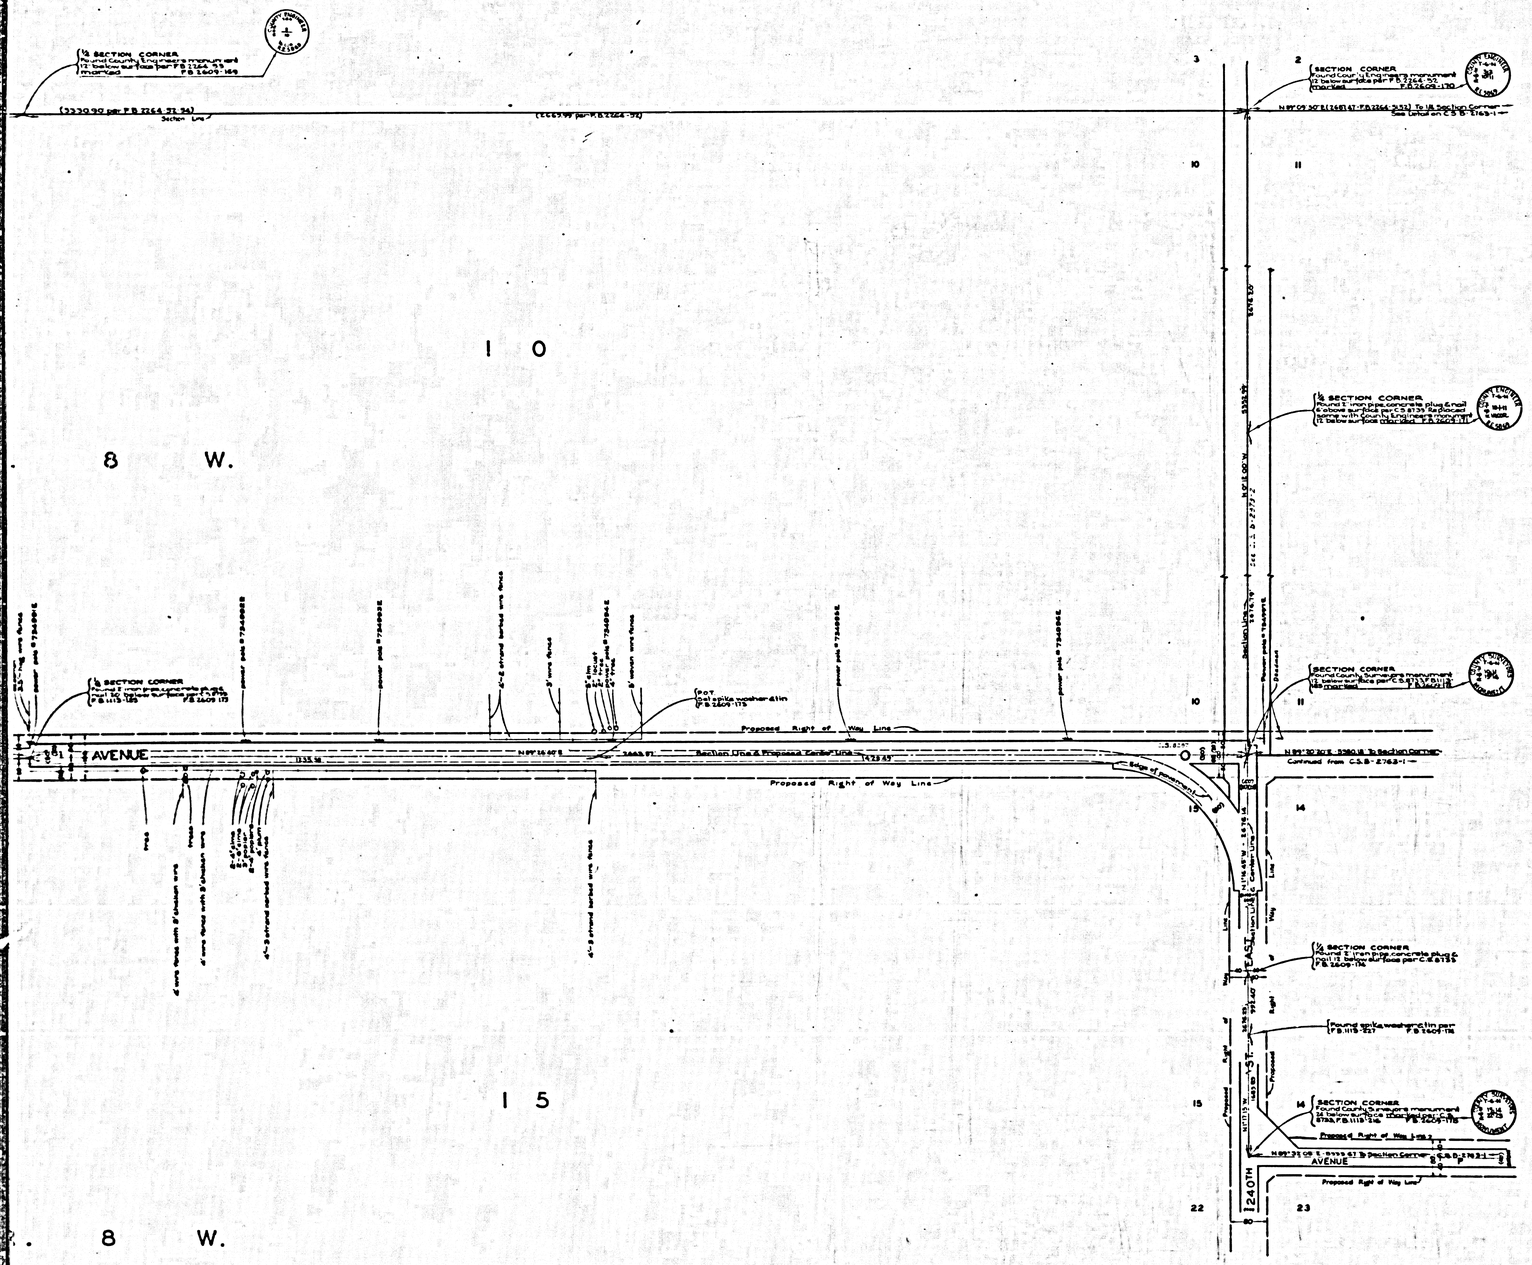
1 0

8 W.

1 5

8 W.


½ SECTION CORNER
Found County Engineer's monument
17 below surface per P.B. 2609-169
(2330.90 per P.B. 2764, 21, 24)
Section Line
(2662.99 per P.B. 2764-21)
SECTION CORNER
Found County Engineer's monument
17 below surface per P.B. 2609-169
Tie
N 89°09'30" E (1158.67 - P.B. 2764 - 21) To ½ Section Corner
Found Lariat on C.S.B.-2763-1
½ SECTION CORNER
Found 1" iron pipe concrete plug and
tack
P.B. 1115-169
POT
On cattle washer 41 in
P.B. 2609-175
Proposed Right of Way Line
AVENUE
1335.18
N 89° 55' 40" E
2668.71
Section Line & Proposed Center Line
1428.69
Edge of pavement
Proposed Right of Way Line
SECTION CORNER
Found County Engineer's monument
as shown on C.S.B.-2763-1
½ SECTION CORNER
Found 1" iron pipe concrete plug and
tack as per C.S.B. 2763-1
tack with ring and tag stamped
"L.S. 3936" as per C.S.B. 2763-1
17 below surface (Elev. = 2326.67)
3336.59
6648.80
N 89°-30' 30" E 3980.18 To Section Corner
Continued from C.S.B.-2763-1
SECTION CORNER
Found County Engineer's monument
as shown on C.S.B.-2763-1
½ SECTION CORNER
Found 1" iron pipe concrete plug and
tack
P.B. 1400-116
Found spike and washer in top of
curb per P.B. 1115-127
P.B. 1400-116
Proposed Right of Way Line
SECTION CORNER
Found County Engineer's monument
as shown on C.S.B.-2763-1
AVENUE
N 89° 35' 09" E 2999.43 To Section Corner
C.S.B. 2763-1
Proposed Right of Way Line
240TH
EAST
30
Section Line
Section Line
Proposed
Proposed
Proposed

SECTION

T. 6 N., R. 8 W.

CSB-2763-2
A2 OF A3

SECTION

T. 6 N.

R. 8

SECTION

16

T. 6 N., R. 8 W.

CSB-2763-2
A3 OF A3