

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS COLIMA ROAD

CITY OF WHITTIER BOUNDARY TO FULLERTON ROAD

TWO WEEKS PRIOR	DURING CONSTRUCTION	
ROAD WORK COLIMA	ROAD WORK AHEAD	SCREEN 1
X X / X X / X X T O X X / X X / X X	X X / X X / X X T O X X / X X / X X	SCREEN 2
E X P E C T D E L A Y S	E X P E C T D E L A Y S	SCREEN 3

LEGEND

- WORK AREA
- TYPE II/III BARRICADE WITH SIGN
- DELINEATOR WITH WHITE REFLECTIVE TAPE
- FLASHING ARROW BOARD
- SIGNALIZED INTERSECTION
- CHANGEABLE MESSAGE SIGN
- nts - NOT TO SCALE

SIGN LEGEND											

TRAFFIC CONTROL PLAN GENERAL NOTES


1. ALL SIGNS, DELINEATORS, BARRICADES, ETC. SHALL CONFORM TO THE STATE OF CALIFORNIA STANDARD SPECIFICATIONS (2023) AND STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION MUTCD 2014 REV 7.
2. STRIPING SHALL BE PER THE LATEST EDITION OF CALTRANS STANDARD PLANS.
3. THE CONTRACTOR SHALL REMOVE ALL CONFLICTING STRIPING, PAVEMENT MARKINGS, LEGENDS, AND ALL CONFLICTING RAISED PAVEMENT MARKERS.
4. THE AGENCY RESERVES THE RIGHT TO OBSERVE THESE TRAFFIC CONTROL PLANS IN USE AND TO MAKE THE NECESSARY CHANGES AS FIELD CONDITIONS WARRANT. ANY CHANGES SHALL SUPERCEDE THESE PLANS.
5. THE CONTRACTOR SHALL PROVIDE FLAGGERS AS DEEMED NECESSARY BY THE ENGINEER.
6. THE CONTRACTOR SHALL NOTIFY ANY AFFECTED TRANSIT SERVICES, FIRE, AND POLICE SERVING THE AREA AT LEAST 14 DAYS PRIOR TO EACH CONSTRUCTION PHASE.
7. THE CONTRACTOR SHALL NOTIFY THE DETOUR ENGINEER AT (626) 300-4855, 14 DAYS IN ADVANCE OF THE START OF EACH PHASE OF TRAFFIC CONTROL.
8. THE CONTRACTOR SHALL PROVIDE ALL CONSTRUCTION SIGNING, BARRICADING, DELINEATORS CHANGEABLE MESSAGE SIGN AND FLASHING ARROW SIGNS AS SHOWN ON THE PLANS.
9. EXISTING SIGNS THAT ARE IN CONFLICT WITH THESE PLANS WILL BE REMOVED OR COVERED BY THE CONTRACTOR.
10. THE CONTRACTOR IS RESPONSIBLE IN MAINTAINING THE TRAFFIC CONTROL SYSTEM SHOWN ON THESE PLANS.
11. THE CONTRACTOR SHALL MAINTAIN DRIVEWAY AND PEDESTRIAN ACCESS AT ALL TIMES.

STAGE I. (CASINO DR TO HALLIBURTON RD)
MEDIAN WORK, BUS PADS.

STAGE II. (HALLIBURTON RD TO AZUSA AVE)
MEDIAN WORK.

STAGE III. (AZUSA AVE TO WALNUT HALL RD)
MEDIAN WORK.

STAGE IV. (WALNUT HALL RD TO FULLERTON RD)
MEDIAN WORK.

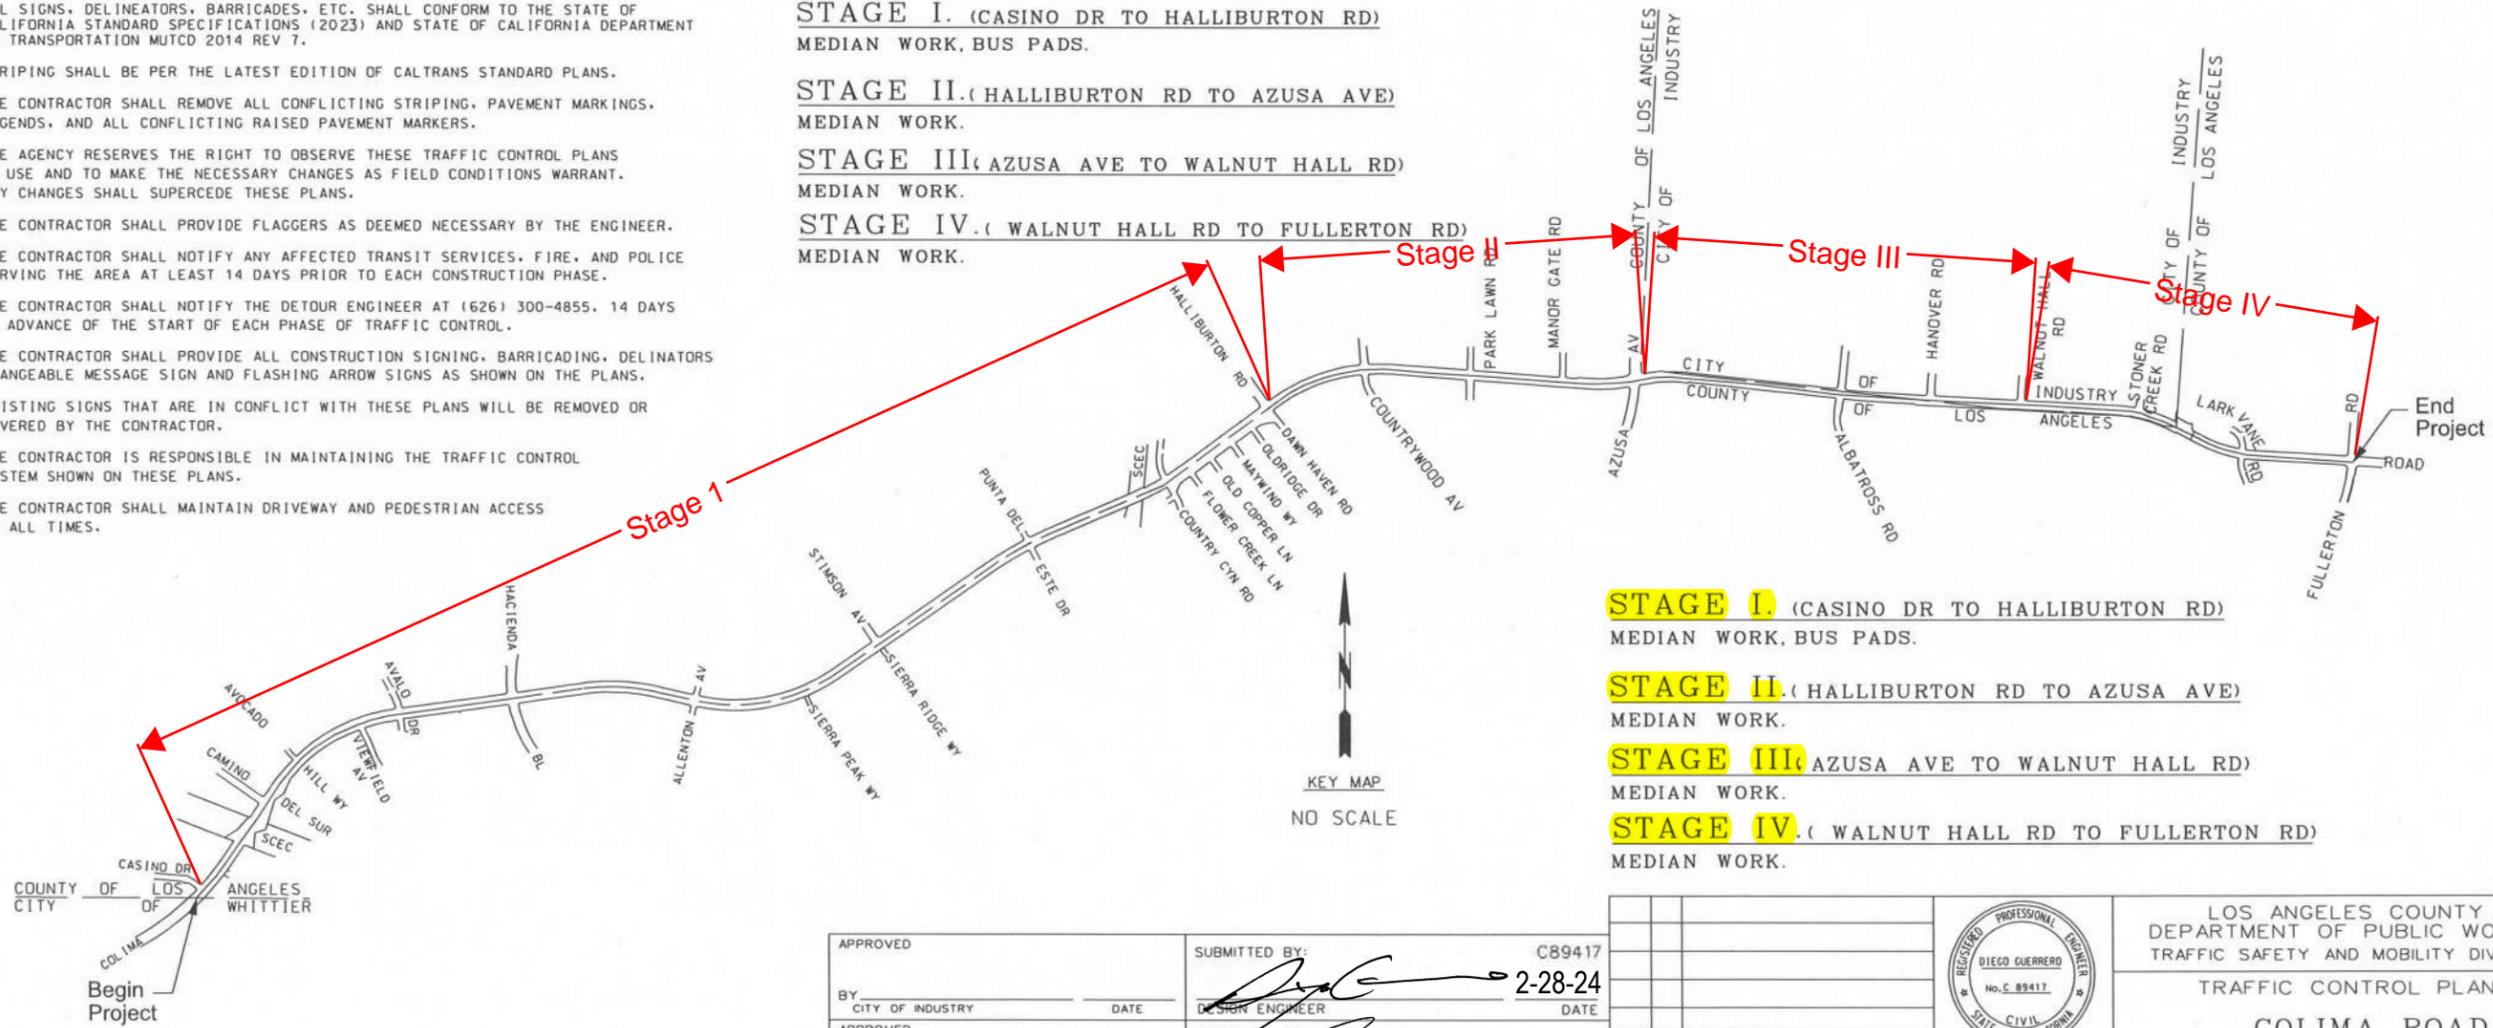

STAGE I. (CASINO DR TO HALLIBURTON RD)
MEDIAN WORK, BUS PADS.

STAGE II. (HALLIBURTON RD TO AZUSA AVE)
MEDIAN WORK.


STAGE III. (AZUSA AVE TO WALNUT HALL RD)
MEDIAN WORK.

STAGE IV. (WALNUT HALL RD TO FULLERTON RD)
MEDIAN WORK.

KEY MAP
NO SCALE

DRAWN BY: A.HASAN

APPROVED	SUBMITTED BY: C89417		
BY: CITY OF INDUSTRY		2-28-24	DATE
APPROVED	DESIGN ENGINEER		
BY: CITY OF WHITTIER	APPROVED BY:	3-13-24	DATE
		DATE	DESCRIPTION
			REVISIONS



LOS ANGELES COUNTY
DEPARTMENT OF PUBLIC WORKS
TRAFFIC SAFETY AND MOBILITY DIVISION
TRAFFIC CONTROL PLAN
COLIMA ROAD
PROJECT ID NO. RCD0014911

PROJECT ENGINEER: PCA X7101082 SCALE: NTS SHT. 1 OF 32

PLAN TC