M.B. 21-155

(60') PROSPECT AVE

(60') STEVENS AVE

EMERSON — S.89°-59'-35"E. — (1322.24' Per Road Dept. F.B. Pc. 94-6) — AVE.

GARVEY

M.R.

ANDOVER

WILDWOOD

WHITMORE ST.

M.B. 46-6

Center Line

1322.97'

S.89°-59'-30"E.

Row of Walnut Trees

PROSPECT AVE.

CF 1569

LOT

M.R. 52-43

D.A.R. 6256-26

D.A.R. 5496-69

D.A.R. 5672-299

D: 4541-28
D: 7408-142

2

BLOCK

GARVEY

LOT A

CS 8864

A1 OF A2

NEW — N.00°-05'-45"W. 880.13' — AVE.

439.94'

(35') (7.0)

(20') (20)

(20') (40')

(60') (60')

(35') (35') (70')

(35') (7.0)

(45') PROSPECT AVE

(45') DOROTHY AVE.

(45') DEGUINE AVE.

NO. 63-90

M.B.

TRACT

GARVEY — S.89°-59'-30"E. — 1323.92' — AVE.

TRACT — NO. 1874 — M.B. 21-41

TRACT — NO. 3511 — M.B. 38-39

Found Spike Tin and Washer per Road Dept. F.B. Pc. 94-6 F.B. 132-1

Found Spike and Washer F.B. 132-4

Found Lead and Tack per Road Dept. F.B. Pc. 94-453 F.B. 132-1

Found Lead and Tack 0.70' Above Ground Per F.B. 132-2

Found Lead and Tack on Center Line Per F.B. 132-2

Found Lead and Tack per F.B. 132-2

Found Lead and Tack per F.B. 132-2

Found Lead and Tack

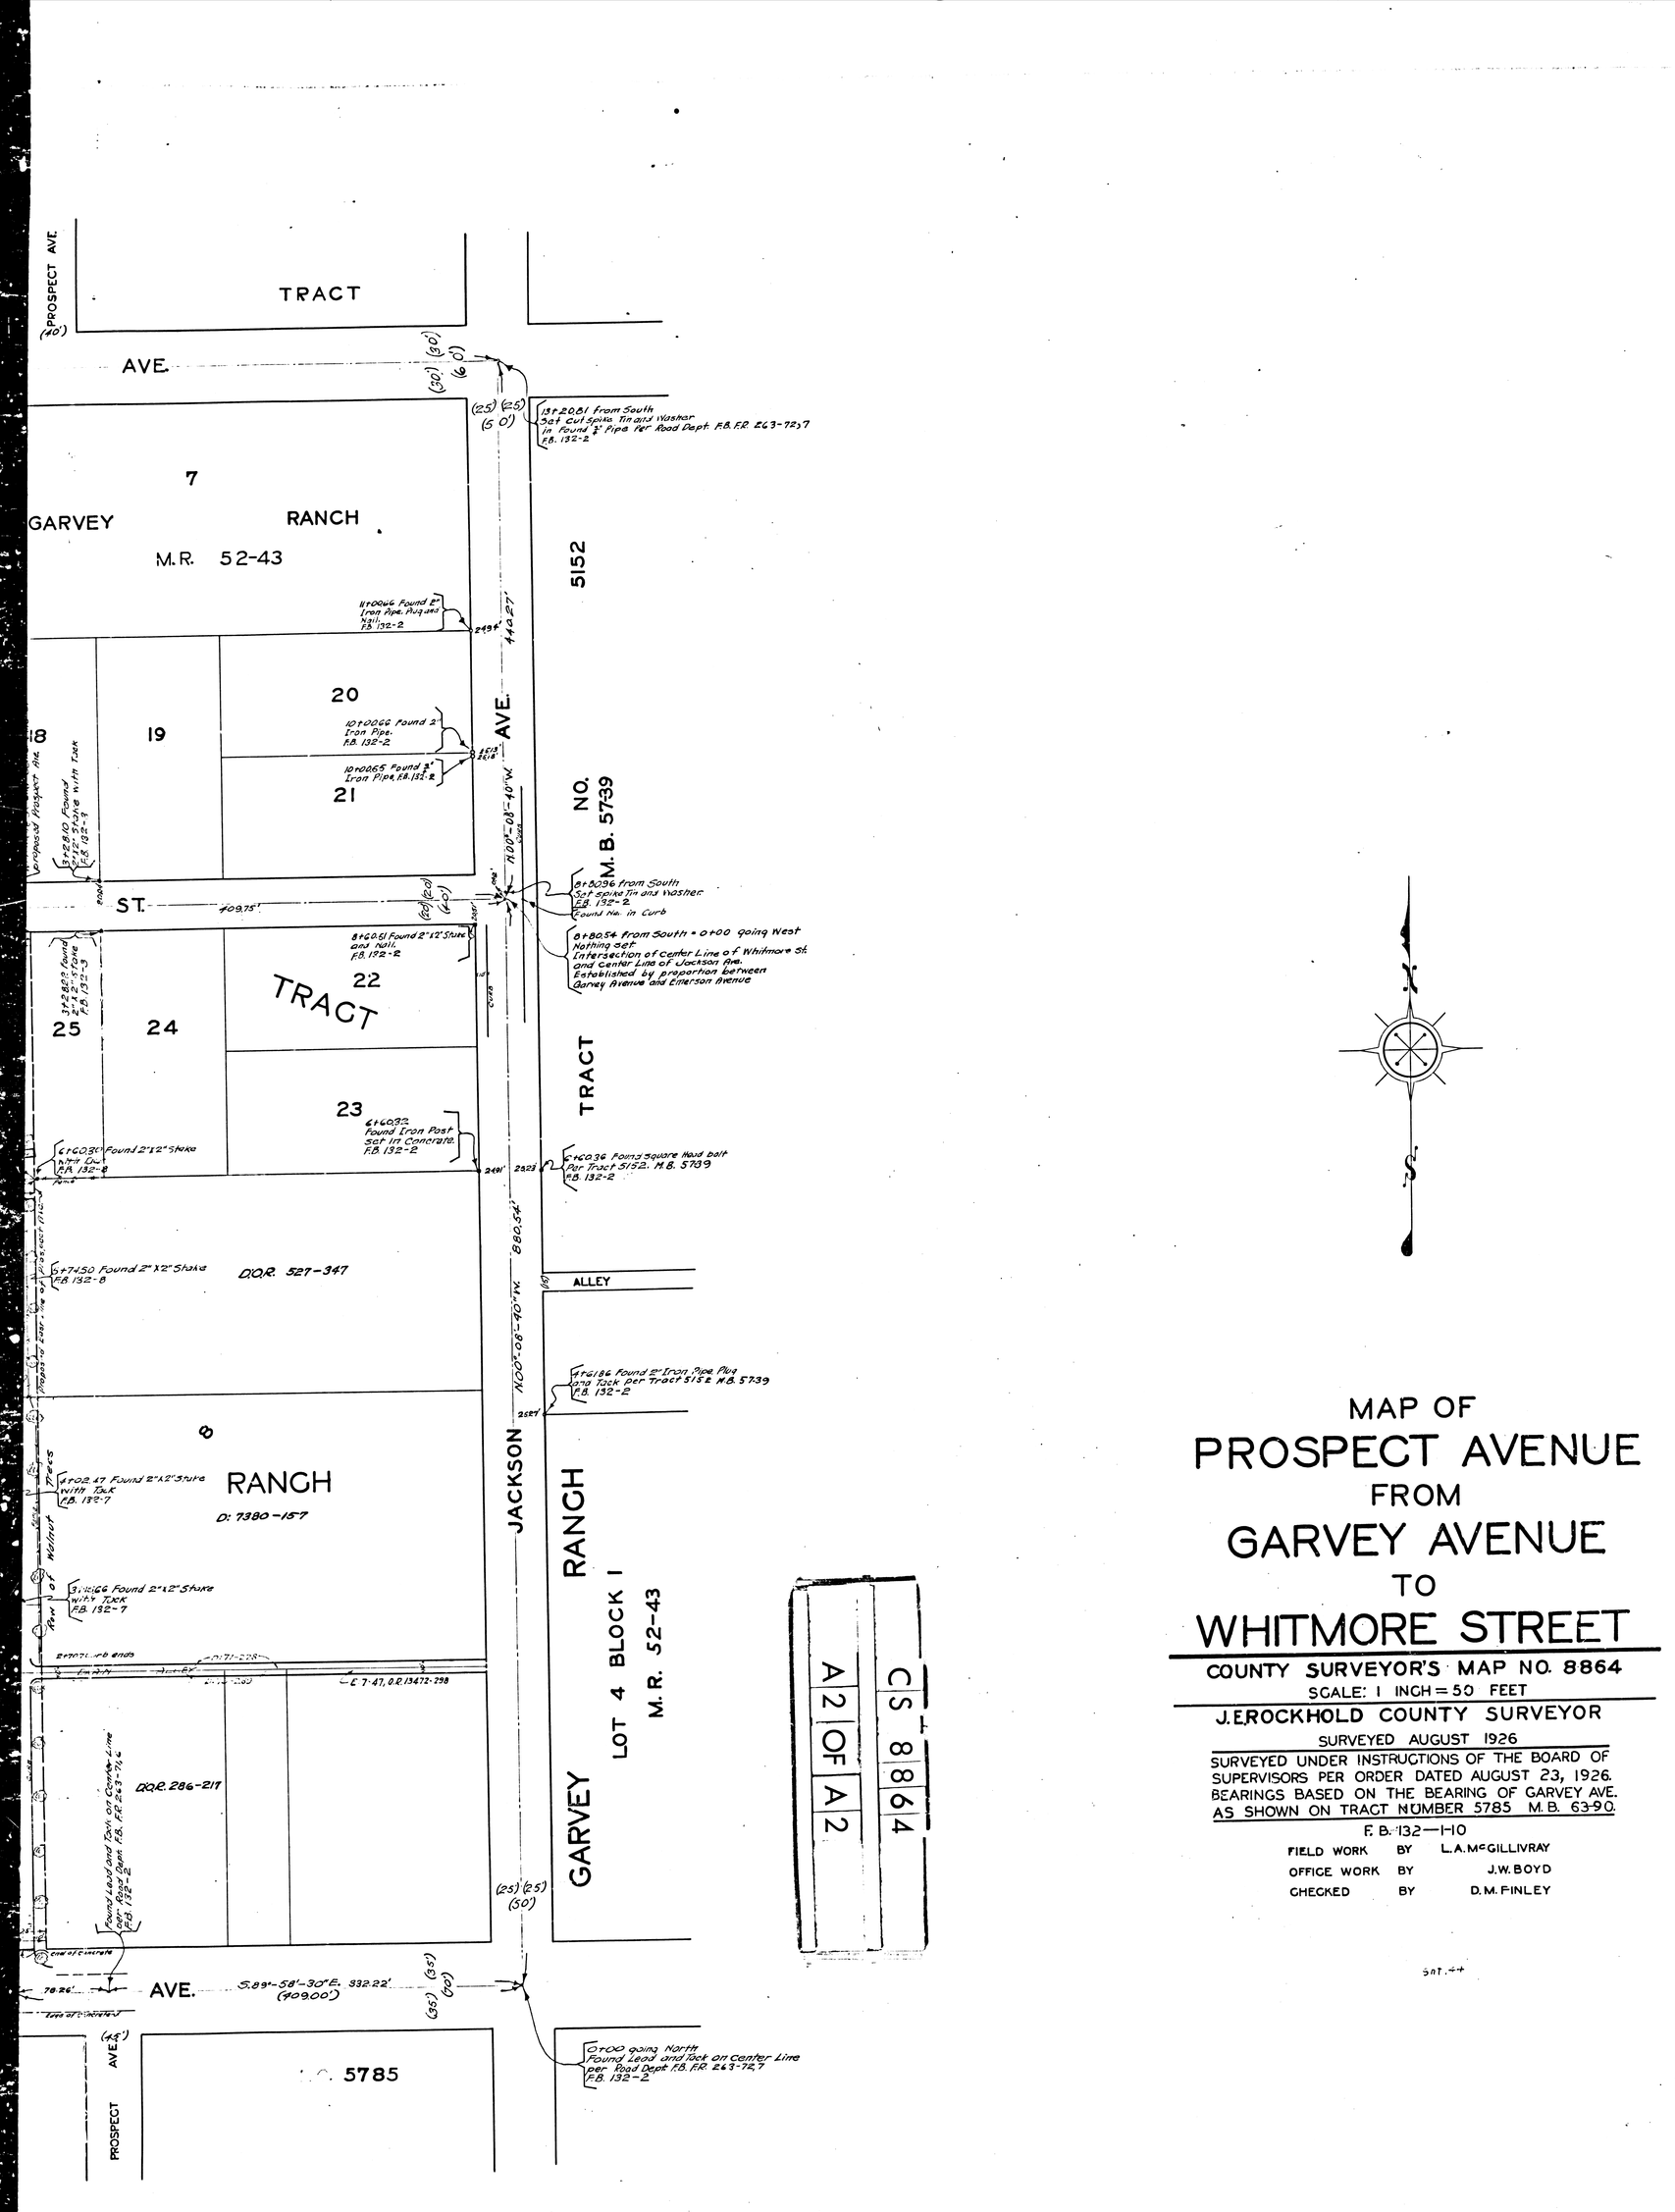

MAP OF PROSPECT AVENUE FROM GARVEY AVENUE TO WHITMORE STREET

COUNTY SURVEYOR'S MAP NO. 8864

SCALE: 1 INCH = 50 FEET

J.E. ROCKHOLD COUNTY SURVEYOR

SURVEYED AUGUST 1926

SURVEYED UNDER INSTRUCTIONS OF THE BOARD OF SUPERVISORS PER ORDER DATED AUGUST 23, 1926. BEARINGS BASED ON THE BEARING OF GARVEY AVE. AS SHOWN ON TRACT NUMBER 5785 M.B. 63-90.

F.B. 132—1-10

FIELD WORK	BY	L.A. McGILLIVRAY
OFFICE WORK	BY	J.W. BOYD
CHECKED	BY	D.M. FINLEY

SAT. 44