


Copied from Photographic Copies
 Furnished by
 U. S. General Land Office
 Washington D. C.

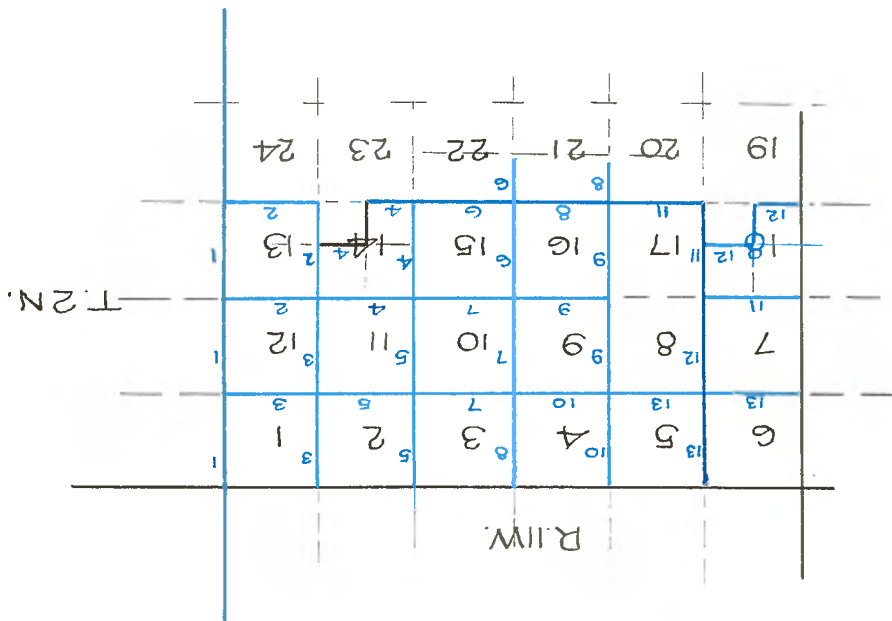

T. 2 N. R. 11 W. San Bernardino

The line between Rs. 10 and 11 can only be run a short

distance I therefore run

South on East boundary of Sec. 1.

Va. 14-1/4 E.

Ascending.

Summit of a spur course S. E. and N. W.

The ground from this point being too rough to measure directly south I offset east 5.00 chs. thence south 19.00 chs. thence west 5.00 chs.

Set line post 3 x 3 in. 6 feet long in rock mound as per inst. for 1/4 sec. cor. on east boundary of sec. 1.

Thence south

Counting distance from cor. of Tps. 2 and 3 N. Rs. 10 and 11 W. cross deep gulch 30 lks. wide co. S. E.

Ascend.

Summit of spur course N. W. and S. E.

Descend.

Set line post 4 x 4 in. 3-1/2 feet long in rock mound for cor. to secs. 1-2-6-7 from which bears a N 1/2 E dia. S. 19-1/2° W. 29 lks. dist.

Land rough with good pine in canadas.

21.00

40.00

53.50

77.50

80.00

South on east boundary of sec. 12.

Va. 14-1/4 E.

Ascend.

Set line post 3 x 3 in. 3-1/2 feet long in rock mound as per instructions for 1/4 sec. cor. whence bears a pitch

line 1 foot dia. N. 18-3/4° W. 1.05 chs.

77.50

Set line post 4 x 4 in. 3-1/2 feet long in rock mound as per instructions for corner to secs. 12-13-7-18.

Land over high mts. good pine and fir timber in canadas. Soil 3rd rate.

80.00

South on east boundary of sec. 13.

Va. 14-1/4 E.

Descending.

Set post 3 x 3 in. 3 feet long in rock mound for 1/4 sec. cor. from which bears a cottonwood 12 ins. dia. S. 10° W.

2.40 chs.

line 2-1/2 feet dia. N. 18-1/4° E. 60 lks.

cross gulch in canada main branch of San Gabriel creek course E.

42.50

Ascend.

Set post 4 x 4 in. 3-1/2 feet long in rock mound on side hill facing W. as per inst. for cor. to secs. 13-24-18-19.

80.00

This is all the land in this direction valuable for timber or otherwise. I therefore do not run this line further south. Sept. 25th 1875.

East on random line between secs. 12 and 13
 Va. 14-1/4 E.
 40.00 Set temporary 1/4 sec. cor.
 43.50 Cross gulch course S. E.
 Ascend.
 80.18 Intersect east boundary of Tp. 10 lks. south of corner to sections 12 and 13.
 Thence,
 S. 89°56' W. on true line between secs. 12 and 13
 Va. 14-1/4 E.
 40.09 Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a pine 3 feet dia. N. 22° E. 60 lks. dist.
 The corner to secs. 11-12-13 and 14.
 Land rolling mountains.
 Soil and rate.
 Pine and Oak timber.

North between secs. 13 and 14.
 Va. 14-1/4 E.
 Descending.
 20.00 Enter Canada, the west fork of San Gabriel course E.
 22.00 Cross creek 6 lks. wide course E.
 23.50 Leave Canada and ascend on ridge.
 40.00 Set pine post 3 x 3 ins. in rock mound as per instructions on side hill facing south for 1/4 sec. cor. from which bears a pitch pine 2 feet dia. N. 18-1/2° W. 60 lks. dist.
 Set post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions on summit of ridge corner to secs. 11-12-13 and 14 from which bears a N. pine 3 feet dia. S. 29° W.
 19 lks. dist.
 P. pine 1 foot dia. N. 80° E. 27 lks. dist.
 Land rolling.
 Timber, pine, low Oak and cottonwood, some grazing in Canada.

As only the northern portion of this Tp. can be subdivided I begin the survey from the corner to Secs. 13-24 on the east boundary of the Tp. I run on true line. West on true line between secs. 13 and 24
 Va. 14-1/4 E.
 40.00 Along on north slope of high mountain range.
 Set sand rock 6 x 10 x 24 ins. in rock mound on hill side facing north as per instructions for 1/4 sec. cor.
 49.50 Cross dry gulch 50 lks. wide course N. E.
 Set post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for cor. to secs. 13-14-23 and 24.
 Land on north slope of high mountain range covered with low brush the ravines to the south are worthless hills, no timber some scattering timber on line.

T. 2 N. R. 11 W. San Bernardino

Sept 27th 1875.

79.45
 39.45
 79.45
 74.00
 44.00
 40.00
 2.50

Summit of high ridge main divide between the waters of the Tadjunga and those flowing in the San Gabriel course S. W. and N. E. Descend.
 Set temporary 1/4 section corner.
 Cross near head of Tadjunga creek course N. W. Ascend.
 Summit of high ridge course N. W. and S. E. Interest north boundary of Tp. 24 lks. west of corner to sections 1 and 2 from this corner I run S. 10° W. on true line between sections 1 and 2 Va. 14-1/4 E.

Set spruce post 3 x 3 ins. 3 feet long in large rock mound as per instructions for 1/4 section corner from which bears white pine 3 feet dia. N. 80° W. 1.05 obs. dist. The corner to sections 1-2-11 and 12. Land rough mostly 1st rate. pine and spruce.

80.26
 40.13
 80.26
 50.00
 40.00

Descending
 Set temporary 1/4 sec. cor.
 Cross dry gulch course S. E. ascend along south slope of mountains.
 Interest east boundary of Tp. 21 lks. north of cor. to secs. 1 and 12
 Thence, N. 89° 51' W. on true line between secs. 1 and 12 Va. 14-1/4 E.

Set pine post 3 x 3 ins. 3 feet in rock mound for 1/4 section corner as per instructions from which bears a pitch pine 12 in. dia. N. 22° W. 17 lks. dist. The corner to secs. 1-2-11 and 12. Land very rough with good pine timber in canyons.

80.00
 51.50
 40.00

Ascending.
 Set pine post 3 x 3 in. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears live oak 1 foot dia. N. 16° W. 62 lks. dist. Descend.
 Cross gulch 51 lks. wide course S. E. Ascend.
 Set pine post 3 x 3 in. 3-1/2 feet long in large wide mound on south hill facing south over summit as per instructions for cor. to secs. 1-2-11-12 from which bears a pitch 20 ins. dia. S. 10° W. 20 lks. dist. N. pine 24 ins. dia. N. 13-1/2° W. 25 lks. dist. Land over rough mountains 2nd rate. pine and fir timber.

North between secs. 11 and 12 Va. 14-1/4 E.

 T. 2 N. R. 11 W. San Bernardino

From the true corner I run East on random line between sections 11 and 14, Va. 14-1/4 E. Leave gulch and ascend. Summit of spur course N. W. and S. E. Set temporary 1/4 section post. Cross gulch 1.02 chs. wide course S. W. Ascend. Intersect N. and S. line 21 lks. south of corner to sections 11-12-13 and 14 from which corner I run S. 89°51' W. on true line between sections 14 and 11 Va. 14-1/4 E.

79.78
50.50
40.00
22.00
1.50

North between sections 14 and 15. Va. 14-1/4 E. Descending. Cross dry gulch 50 lks. wide. Cross creek .06 chs. wide the west fork of the San Gabriel course east. Ascend. Set mound post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner. Center of deep gulch course S. E. not a suitable place to build a monument I set an oak post 3 x 3 ins. 3 feet long in rock mound 2.50 chs. W. as per instructions for witness to corner to sections 10-11-14 and 15. Land very rough, timber scattering pine, fir and oak.

80.00
40.00
29.00
8.50

The line between sections 14 and 23 is very rough I therefore begin at the 1/4 section corner between sections 13 and 14 and run West on true line through section 14. Va. 14-1/4 E. Set spruce post 3 x 3 ins. 3 feet long in earth mound and pits on east side of deep canada as per instructions for center of section 14. Thence, South, on 1/4 section line through center of section 14. Va. 14-1/4 E. Cross gulch 50 lks. wide course S. E. Cross west fork of San Gabriel River 6 lks. wide course E. Ascend. Set pine post 3 x 3 ins. 3 feet long on high abrupt bluff in rock mound as per instructions on west side of deep canada for 1/4 section corner between sections 14 and 23 from which bears a fir 20 ins. dia. N. 60° W. 29 lks. dist. West between sections 14 and 23. Va. 14-1/4 E. Along north slope of mountains. Set oak post 4 x 4 ins. 3-1/2 feet long in rock mound near foot of high abrupt mountains as per instructions for corner to sections 14-15-22 and 23 from which bears a live oak 14 ins. dia. N. 27-1/2° E. 29 lks. dist. Land very rough mountains with good pine timber in canadas and scattered over the mountains.

40.00
40.00
21.50
11.00
40.00

Descending. 6.00
 Cross branch of Arroyo Tajunga 25 lks. wide course S. W. 6.50
 Cross an old trail course N. E. and S. W. Ascend. 40.00
 Set temporary 1/4 section corner. 57.50
 Summit of high bald mountain covered with 1st rate pine. 77.25
 Small spring 1.00 ch. E. of line. 79.75
 Intersect north boundary at the post corner to sections 2 and 3 from this corner I run

North on random line between sections 2 and 3. Va. 14-1/4 E. 80.00
 Land very rough 1st rate. pine. 40.00
 The corner to sections 2-3-10 and 11. 80.00
 N. pine 24 in. dia. S. 27-3/4 W. 1.06 chs. dist. 40.00
 Pine 12 ins. dia. N. 17-1/2 W. 27 lks. dist. 80.00
 Instructions for 1/4 section corner from which bears pitch Set pine post 3 x 3 ins. 3 feet long in rock mound as per Va 14-1/4 E. 40.00
 N. 89°56' W. on true line between sections 2 and 11 80.00
 1-2-11 and 12 from this corner I run 80.00
 Intersect N. and S. line 10 lks. north of corner to sections Gabriel River course S. W. and N. E. 75.50
 Summit of divide between waters of the Tajunga and the San Set temporary 1/4 section corner. 40.00
 Along north boundary of timbered mountains. 40.00
 Va. 14-1/4 E. 80.00
 East on random line between sections 2 and 11

Land high mountains, mostly 1st rate. pine timber. 80.00
 N. pine 2 feet dia. N. 55° E. 25 chs. dist. 53.50
 From which bears a N. pine 4 feet dia. N. 20° W. 1.06 chs. dist. 40.00
 Set pine post 4 x 4 ins. 3-1/2 feet long in earth mound and pits as per instructions for corner to sections 2-3-10-11 Descend timbered hills. 40.00
 Between the water of the Tajunga and San Gabriel creeks Summit of high timbered ridge course N. E. and S. W. divide 14 ins. dia. S. 80-1/2° W. 96 lks. dist. 2.50
 Instructions for 1/4 section corner from which bears a fir Set fir post 3 x 3 ins. 3 feet long in rock mound as per Witness post and ascend. 40.00
 Va. 14-1/4 E. 80.00
 North between sections 10 and 11. 40.00

Land very rough, scattering pine and fir, low brush, Redwood and Chemical. 79.78
 The corner to sections 10-11-14-15. 39.89
 N. pine 4 feet dia. N. 21° E. 1.05 chs. dist. 79.78
 per instructions for 1/4 section corner from which bears a Set pine post 3 x 3 ins. 3 feet long in rock mound as

 T. 2 N. R. 11 W. San Bernardino

Being unable to proceed further on this line I return
 West between sections 15-16-21 and 22.
 Va. 14-1/4 E.
 Descending.
 Cross creek .06 cbs. wide branch of the San Gabriel course S. E.
 Ascend.
 Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per
 instructions for 1/4 section corner on summit of spur course
 E. and W.
 Descend.
 Cross gulch 1.00 cbs. wide course S. E.
 Ascend.
 Set pine post 4 x 4 ins. 3-1/2 feet in large rock mound as
 per instructions for corner to sections 9-10-15 and 16.
 Land very rough. Timber scattering pine and fir.

80.00
 64.50
 40.00
 7.50

South between sections 21 and 22.
 Va. 14-1/4 E.
 Set pine post 3 x 3 ins. 3-1/2 feet long in earth mound and
 pits as per instructions on steep side hill facing N. E. for
 1/4 section corner.
 Timber 2nd and 3rd rate.

40.00

From corner to sections 14-15-22 and 23 I run
 West on true line between sections 15 and 22
 Va. 14-1/4 W.
 Cross gulch 50 lbs. wide course N. E.
 Set post 3 x 3 in. 3-1/2 feet long in rock mound as per
 instructions for 1/4 section corner from which bears a
 N. line 3 feet dia. N. 49° W. 27 lbs. dist.
 Set pine post 4 x 4 ins. 3-1/2 feet long in rock mound for
 corner to sections 15-16-21 and 22.
 Land along north slope of mountains 2nd rate. Timber.

80.00
 40.00
 12.00

Sept. 28th 1875.
 South on true line between sections 2 and 3.
 Va. 14-1/4 E.
 Set Oak post 3 x 3 ins. 3-1/2 feet long in rock mound as per
 instructions for 1/4 section corner on side hill facing S.
 The corner to sections 2-3-10 and 11.
 Land over high mountains N. 1/2 1st rate.
 Pine S. 1/2 worthless covered with low brush.

79.75
 39.75

I. 2 N. R. 11 W. San Bernardino.

20.00 Enter canada thence up canada.
 21.00 Cross old trail nearly E. - N. W. thence along W. side
 of trail on W. edge of canada.
 40.00 Set post for temporary 1/4 section corner.
 66.00 Cross trail course N. E. and S. W.
 68.50 Cross Gulch course S. W. in canada 5 lks. wide.
 80.06 Intersect N. and S. line 21 lks. south of corner to
 sections 2-3-10 and 11 from this corner I run
 S. 89° 51' W. on true line between sections 3 and 10
 Va. 14-1/4 E.
 40.03 Set Oak post 3 x 3 ins. 3 feet long in rock mound for 1/4
 section corner as per instructions.
 80.06 The corner to sections 3-4-9 and 10.
 Land along canada good grazing.
 Pine.
 Soil 2nd rate.

East on random line between sections 3 and 10 Va. 14-1/4 E.

26.50 Summit of divide between the water of the Tajunga and the
 ascending.
 40.00 San Gabriel River course N. E. and S. W.
 Descend.
 40.00 Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per
 instructions for 1/4 section corner from which bears white
 pine 2 feet dia. S. 27° W. 50 lks. dist.
 80.00 White pine 3 feet dia. S. 48° E. 70 lks. dist.
 Set Oak post 4 x 4 ins. 3 feet long in rock mound as per
 instructions for corner to sections 3-4-9 and 10 from
 which bears a fir 24 in. dia. N. 82° W. 29 lks. dist.
 Land rough 2nd rate. Pine scattering.

North between sections 9 and 10. Va. 14-1/4 E.

40.00 Set temporary 1/4 section corner.
 80.20 Intersect N. and S. line at true corner to sections 10-11-14
 and 15 from this corner I run west on true line between
 sections 10 and 15
 Va. 14-1/4 E.
 40.10 Set Oak post 3 x 3 ins. 3-1/2 feet long in rock mound as per
 instructions for 1/4 section corner from which bears a fir
 24 ins. dia. N. 70° W. 22 lks. dist.
 80.20 The corner to sections 9-10-15 and 16.
 Land rough, broken Good pine in places very scattering.

East on random line between sections 10 and 15 Va. 14-1/4 E.

T. 2 N. R. 11 W. San Bernardino

L. 2 N. R. 11 W. San Bernardino

North on random line between sections 3 and 4
Va. 14-1/4 E.

20.00

Descending.

21.00

Enter canada course W. and S. E.

22.50

Cross old trail course W. and S. E.

23.50

Cross boundary gulch 50 lks. wide course W.

40.00

Set post temporary 1/4 section corner.

56.50

Summit of spur course E. and W.

80.00

Descending.

Intersect north boundary of Tp. 18 lks. E. of corner to

sections 3 and 4 from which corner I run

S. 08° E. on true line between sections 3 and 4

40.00

Set post 3 x 3 ins. 3-1/2 feet long in rock mound as per

instructions for 1/4 section corner.

80.00

The corner to sections 3-4-9 and 10.

Land rough.

Good scattering pine, grazing in canadas.

Sept. 29th 1875.

From corner to sections 15-16-21 and 22 I run,
West on true line between sections 16 and 21

Va. 14-1/4 E.

40.00

Along on North slope of hills.

The point for 1/4 section falling in deep gulch course N. E.

not a suitable place to build a monument. I set Oak post

3 x 3 ins. 3-1/2 feet long in rock mound as per instructions

1.50 ons. west for witness to 1/4 section corner from which

bears a fir 2 feet in dia. W. 18° E. 60 lks. distance.

79.00

Enter canada.

Set Alder post 4 x 4 ins. 3-1/2 feet long in earth mound

and pits as per instructions for corner to sections 16-17-20

and 21 from which bears an Alder 6 ins. in dia. N. 18-1/2° W.

60 lks. dist.

Land along foot of high mountain scattering timber pine, fir

and Oak.

40.00

Ascending.

Set Redwood post 3 x 3 in. 3-1/2 feet long in earth mound in

S. E. slope of hills as per instruction for 1/4 section corner.

This is as far as the line can be run South as the country

is too rough and worthless to survey.

Land very rough and rate.

Pine scattering.

North between sections 8 and 9 Va. 14-1/4 E.

18.50 Cross gulch course S. W. and ascend.
 40.00 Set temporary 1/4 section corner.
 45.00 Summit of high ridge course N. and S.
 47.50 Descend.
 71.00 Cross dry gulch near head 5 lks. wide course N. E.
 80.50 sections 9-10-15 and 16 from this corner I run
 S. 89°47' W. on true line between sections 9 and 16
 Va. 14-1/4 E.
 40.25 Set pine post 3 x 3 ins. 3 feet long in large rock mound as
 per instructions for 1/4 section corner on side hill facing
 west from which bears a Norway pine 3 feet dia. N. 60° W.
 71 lks. dist.
 The corner to sections 8-9-16 and 17.
 Land very rough with good scattering pine in canadas.

East on random line between sections 9 and 16 Va. 14-1/4 E.

2.50 Cross creek 6 lks. wide course E.
 6.50 Leave canada and ascend over foot of hills.
 30.00 Cross dry gulch 50 lks. wide course S. E.
 40.00 Ascend.
 40.00 Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as
 per instructions for 1/4 section corner from which bears a
 Norway pine 3 feet in dia. N. 14° W. 70 lks. dist.
 The line here causes a deep canada too rough to measure this
 line further north therefore run West on 1/4 line through
 section 17.
 Va. 14-1/4 E.
 15.50 Cross dry gulch 50 lks. wide course S. E.
 40.00 Set pine post 3 x 3 ins. 3-1/2 feet long for center of
 section 17.
 North on 1/4 section line through section 17.
 19.50 Edge of dry gulch course S. E.
 20.00 Over same and ascend.
 40.00 To the line between sections 8 and 17.
 Set oak post 3 x 3 ins. 3-1/2 feet long as per instructions
 in rock mound for 1/4 section corner from which bears a fir
 2 feet in dia. N. 71° W. 45 lks. dist.
 From this corner I run,
 East between sections 8 and 17.
 Va. 14-1/4 E.
 40.00 Along side hill sloping S.
 Set pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per
 instructions on side hill facing S. E. for corner to sections
 8-9-16 and 17 from which bears a pitch pine 1 1/4 ins. dia.
 S. 28° W. 14 lks. dist.
 Pitch pine 12 ins. in dia. N. 22° E. 30 lks. dist.
 Land very rough with good scattering pine in canadas.

<p>Ascending. Summit of high spur between water of the Tajunga and San Gabriel. 24.00 Descend. 40.00 Set spruce post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner from which bears a pit 24 in. dia. N. 70° W. 62 lks. dist. P. pine 12 ins. dia. S. 64-1/2° E. 29 lks. dist. Set pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 4-5-8 and 9. Land high rolling mountains. Let rate pine in places very scattering. Sept. 30th 1875.</p>	

<p>Descending. Summit of high spur between water of the Tajunga and San Gabriel. 21.00 24.00 Descend. 40.00 Set spruce post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions for 1/4 section corner. Pit 24 in. dia. N. 70° W. 62 lks. dist. P. pine 12 ins. dia. S. 64-1/2° E. 29 lks. dist. Set pine post 4 x 4 ins. 3-1/2 feet long in rock mound as per instructions for corner to sections 4-5-8 and 9. Land rolling with good pine scattering. The corner to sections 4-5-8 and 9. 80.32</p>	

<p>East on random line between sections 4-9. Va. 14-1/4° E. Along side hill facing N. Summit of a spur course N. and S. Descend. 22.50 Set post for temporary 1/4 section corner. Cross gulch 50 lks. wide course W. Intersect N. and S. line 10 lks. south of corner to sections 3-4-9 and 10 from this corner I run S. 89°56' W. on true line between sections 4 and 9 Va. 14-1/4° E. Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as per instructions on side hill facing N. E. for 1/4 section corner. 40.16 80.32</p>	

<p>North on random line between sections 4 and 5. Va. 14-1/4° E. Descending. Cross dry gulch 50 lks. wide course N. E. 40.00 Set temporary 1/4 section corner. Cross old trail in edge of canada course N. W. and S. E. 48.50 Cross gulch 50 lks. wide course N. W. 53.50 Leave valley. Ascend. 55.00 Intersect north boundary of Tp. 19 lks. west of corner to sections 4 and 5. Thence S. 08° W. on true line between sections 4 and 5. Va. 14-1/4° E. Set alder post 3 x 3 ins. in earth mound and pits as per instructions for 1/4 section corner. 40.12 The corner to sections 4-5-8 and 9. 80.12 Land rolling good scattering pine in places and rate, grazing in canades.</p>	

The line between sections 8 and 17 crosses deep
 Canada too rough to survey I run
 West on random line between sections 7 and 18
 Va. 14-1/4 E.
 Along N. E. slope of ridge.
 Summit of high spur course N. W. and S. E.
 Descend.
 Set temporary 1/4 section corner.
 Cross trail course N. W. and S. E.
 Intersect west boundary of Tp. 21 lks. north of corner
 to sections 7 and 18. Hence
 N. 89°51' E. on true line between sections 7 and 18
 Va. 14-1/4 E.
 Set pine post 3 x 3 ins. 3-1/2 feet long in rock mound as
 per instructions for 1/4 section corner from which bears a
 pitch line 12 ins. dia. N. 12° W. 21 lks. distance.
 The corner to sections 7-8-17 and 18.
 Land very rough, timber pine and fir scattering.

50.20
 40.20
 80.20
 53.00
 40.00
 38.00

from corner to sections 16-17-20 and 21 I run
 West on true line between sections 17 and 20
 Va. 14-1/4 E.
 Enter gulch course N. 80° E. up gulch about 1.00 ch. wide.
 Point for 1/4 section corner falling in center of gulch
 I set oak post 3 x 3 ins. 3 feet long in rock mound as per
 instructions 1.50 dist. north for witness to 1/4 section
 corner from which bears an alder 10 in. dia. S. 20° W.
 1.10 ch. dist.
 Leave gulch along on N. side of same.
 Cross old trail course N. W. and S. E.
 Cross dry gulch 50 lks. wide course S. E.
 Ascend.
 Set oak post 4 x 4 ins. 3-1/2 feet long in rock mound as
 per instructions for corner to sections 17-18-19 and 20.
 Land along Canada good grazing and rate timber pine, alder
 and fir.
 The land S. is too rough and worthless to measure also the
 line between sections 18 and 19 I run
 North between sections 17 and 18.
 Va. 14-1/4 E.
 Cross old trail in Canada course N. W. and S. E.
 Cross gulch 50 lks. wide in ravine.
 Ascend.
 Set post 3 x 3 ins. 3 feet long in rock mound as per
 instructions for 1/4 section corner.
 Hedwood 6 ins. dia. N. 18° W. 21 lks. dist.
 Summit of spur course N. W. and S. E.
 Descend.
 Set pine post 4 x 4 ins. 3-1/2 feet long in rock mound as
 per instructions for corner to sections 7-8-17 and 18.
 Land rough, and rate pine and fir.

80.00
 44.00
 40.00
 9.00
 5.00
 80.00
 72.75
 72.00
 44.50
 40.00
 10.00

L. 2 N. R. 11 W. San Bernardino