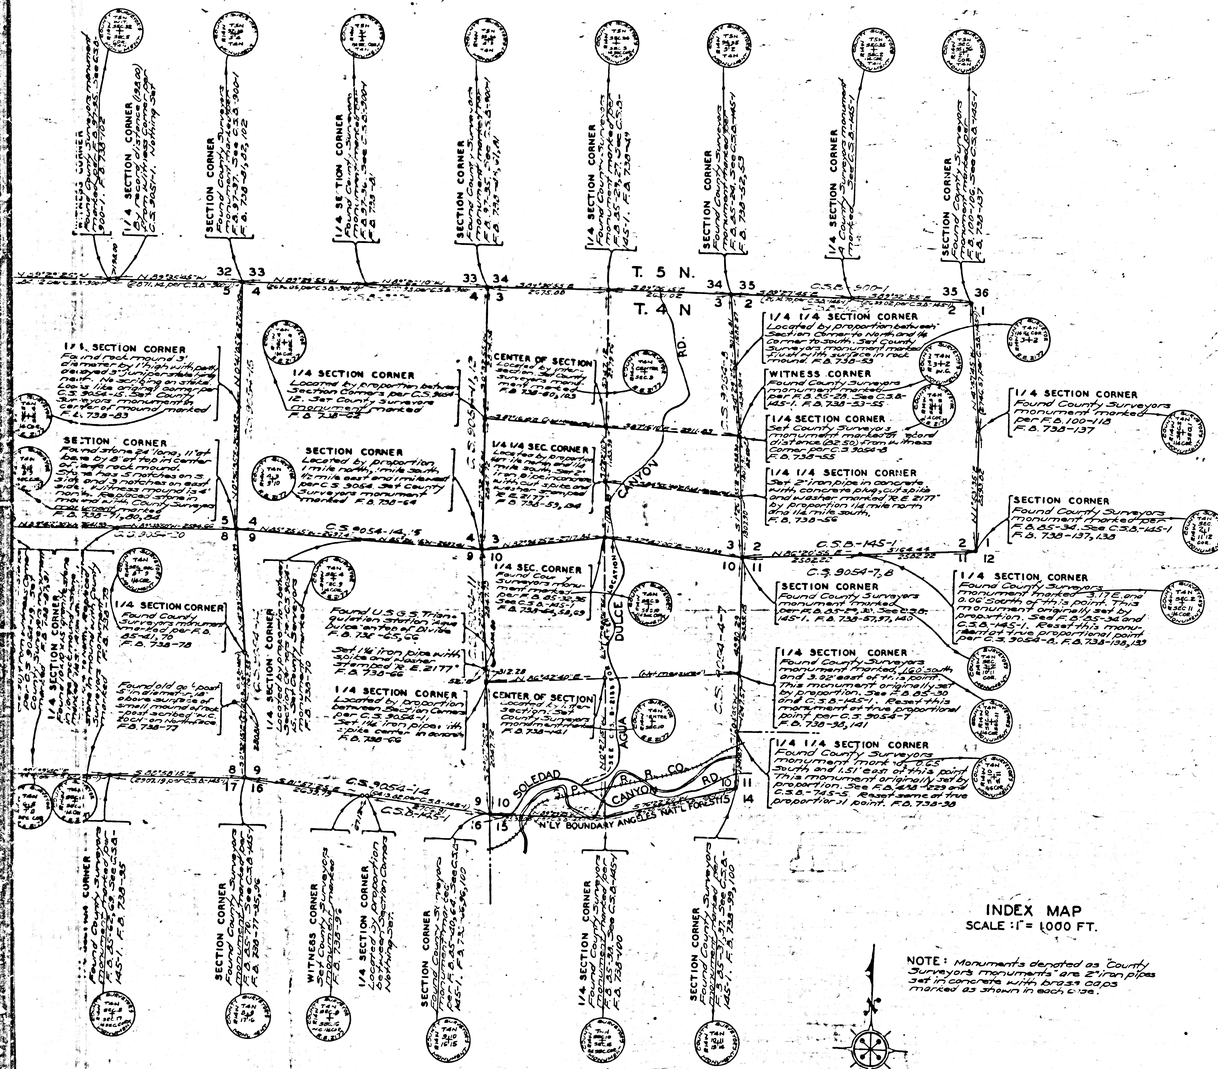


INDEX MAP
SCALE: 1" = 1000 FT.

NOTE: *Monuments denoted as "County Surveyor's monuments" are 2" iron pipes set in concrete with brass caps marked as shown in each case.*

COUNTY OF LOS ANGELES
MAP OF

AGUA DULCE CANYON ROAD

FROM
NORTH LINE SECTION 3-T.4N.-R.14W.
TO
SOLEDAD CANYON ROAD

COUNTY SURVEYORS MAP Nº B-1983
SCALE: 1 INCH = 100 FT.

JOB NUMBER 8167

ALFRED JONES – COUNTY SURVEYOR
SURVEYED – MAR. – OCT. 1946

SURVEYED ON REQUEST OF THE ROAD COMMISSIONER UNDER SEC. 79, ORD. 4099 FEB. 15, 1946

BEARINGS ARE BASED ON TRUE BEARINGS FOR A MERIDIAN THROUGH U.S.G.S. TRIANGULATION STATION "AGUA DULCE"

F. B. 736-47-142

FIELD WORK BY . . . . . F. G. HOWARD
K. R. McPHERSON
OFFICE WORK BY . . . . . C.W. COX
CHECKED BY . . . . . K. R. McPHERSON

INDEX Nº M 79

CSB-1983
A1 OF A5

1/4 1/4 SECTION CORNER
Located by proportion between the North and East corner to the South, Found 3" iron pipe with brass cap marked "ERS R.14W. 1953" and C.S.B. 765-S, 1 ACS. down and 1.5' East of this point. Removed stone and found concrete crossmine, proportional point R.D. 738-94

BOUNDARY OF ANGELES NATIONAL FOREST

SECTION CORNER
Found 2" iron pipe set in concrete with brass cap marked per R.S. 85-31, 37 See C.S.B.-145-1, F.B. 738-99, 100

T. 4 N. R. 14 W.

SECTION 10

C. S. B- 2133

OF SECTION 10 T. 4 N. R. 14 W.

RAILROAD

PACIFIC

SOUTHERN

SOLEDAD CANYON RD.

NORTHERLY BOUNDARY OF ANGELES NATIONAL FOREST

1/4 SECTION CORNER
Found 2" iron pipe with brass cap flush with ground, R.S. 738-34, F.B. 738-101

P.I. N. 32A = P.O.T. of Soledad Canyon Rd. Set spike nail and tin flush with pavement, recorded distance 36.71' N'ly from P.I. N. 32A per C.S.B.-145-2 F.B. 738-130

Set spike nail and tin flush with surface F.B. 738-130

Set nail and tin F.B. 738-130

Set spike nail and tin F.B. 738-130

P.I. N. 31 of Soledad Canyon Road per C.S.B.-145-5 Found 1" iron pin per F.B. 738-130

See Drainage Easement C.S.B.-145-5

R.O.S.T.-Set spike nail and tin 12" below surface, F.B. 738-126

Nothing Set

N 89°27'15" W (Field measured) 1/4 Section Line

S 89°27'15" E 455.90

S 0°32'45" W 355.45

Set spike nail and tin F.B. 738-130, 131

Found 3/4" iron pipe with brass cap flush with ground, R.S. 738-34, F.B. 738-101

THIS ALIGNMENT ABANDONED BY COUNTY SURVEYOR SEPT. 1948 — FOR ADOPTED ALIGNMENT SEE C. S. B- 2133

SECTION CORNER
Found 2" iron pipe set in concrete with brass cap marked per R.A. 85-29,38 case C.S.B.-1857 & S. 7398-87, 37, 140

1/4 SECTION CORNER
Located by proportion 1/2 mile North and 1/2 mile South per C.S. 3052-7. Found 2" iron pipe with brass cap marked per R.A. 85-30 and C.S.B.-1857 1.60' South and 3.32' East of this point. Raising same and reset in concrete at the true proportional point. R.A. 738-39, 141

1/4 1/4 SECTION CORNER
Located by proportion between 1/4 corner to the North and Section Corner to the South. Found 2" iron pipe with brass cap marked per R.A. 85-28 and C.S.B. 755-57 - 4.65 South and 1.51' East of this point. Removed same and reset in concrete at the true proportional point. R.A. 738-39

BOUNDARY OF ANGELES NATIONAL FOREST

SECTION CORNER
Found 2" iron pipe set in concrete with brass cap stamped per R.A. 85-31, 37 case C.S.B.-1857, R.A. 738-39, 140

S 31°08'05" W — 2425.16 Section Line

S 31°08'05" W — 1247.57

R. 14 W.

T. 4 N.

SECTION 10

SECTION 10 T. 4 N. R. 14 W.

S. W. 1/4 OF SECTION 10 T. 4 N. R. 14 W.

N. E. 1/4

S. E. 1/4

AGUA

DULCE

CANYON

RD.

RAILROAD

1/4 Section Line

N 0°27' 15" W

1/4 SECTION CORNER
West 1/4 Corner of Section 10 T. 4 N. R. 14 W. Located by proportion. See Index sheet Right. Set 1/2" iron pipe center with spike in concrete. R.A. 738-66, 142

CENTER SECTION 10 T. 4 N. R. 14 W.

CSB-1983
A3 OF A5

WITNESS CORNER
Found 2" iron pipe set in concrete with brass cap marked "pk" for C.S. 85-28
See C.S.B.-1851
F.B. 738-53-55

1/4 SECTION CORNER
Located at record distance from witness corner per C.S. 30-54-6
Set 2" iron pipe in concrete with brass cap marked
F.B. 738-55, 104

1/4 1/4 SECTION CORNER
Located by proportion between 1/4 corners the North, and Section corner to the South. Set 2" iron pipe in concrete, centered with cement plug, cut spikes and washer stamped R.E. 2177
F.B. 738-56

SECTION CORNER
Found 2" iron pipe set in concrete with brass cap marked "pk" per C.S. 85-29, 55. See C.S.B.-1851
F.B. 738-53, 97, 140

1307.20 Section Line

S 1°26'35" E — 1307.20

R. 14 W.

T. 4 N.

NORTH 1/2 OF S.E. 1/4 OF SECTION 3 T. 4 N. R. 14 W.

SOUTH 1/2 OF S.E. 1/4 OF SECTION 3 T. 4 N. R. 14 W.

SECTION 10

BRIGGS RD.

DULCE

CANYON

AGUA

RD.

Proposed Right of Way Line

Proposed Right of Way Line

CENTER OF SECTION 3
T. 4 N. R. 14 W.
Set 2" iron pipe in concrete with brass cap marked "pk" by intersection
F.B. 738-60, 103

1/4 1/4 SECTION CORNER
Located by proportion between 1/4 corners on the North, and Section corner to the South. Set 2" iron pipe in concrete, centered with cement plug, cut spikes and washer stamped R.E. 2177
F.B. 738-53, 134

1/4 SECTION CORNER
West 1/4 Corner of Section 3 T. 4 N. R. 14 W. Located by proportion. See Index Map for Right. Set 2" iron pipe in concrete with brass cap marked
F.B. 738-62

See Index Map at Right

1/4 SECTION CORNER
Concrete monument with brass cap
F.B. 738-53, 83, 111

See Index Map at Right

CSB-1983
A4 OF A5

T. 5 N. R. 14 W.

T. 4 N. R 14 W.

T. 4 N. R. 14 W.

N. E. 1/4 OF SECTION 3

SECTION CORNER
Found 2" iron pipe set in concrete with brass cap marked per R.A.S. 25-24, P.A. 738-52,53

1/4 1/4 SECTION CORNER
Located by triangulation between Section corners to the North and Section corners to the South. Set 2" iron pipe in concrete with brass cap marked "LS 4176" flush with the surface in rock mound P.A. 738-53

WITNESS CORNER
Found 2" iron pipe set in concrete with brass cap marked "LS 4176" flush with the surface in rock mound P.A. 738-53-55

1/4 SECTION CORNER
Found 2" iron pipe set in concrete with brass cap marked per R.A.S. 25-23, P.A. 738-50

CENTER OF SECTION 3
T. 4 N. R. 14 W.
Set 2" iron pipe in concrete with brass cap marked by intersection
P.A. 738-60, 103

SCHAEFER RD.

BRIGGS RD.

DULCE

LAGUNA

PINTADO

Proposed Right of Way Lines

Proposed Right of Way Center Line

1/4 Section Line

Section Line

CSB-1983
A5 OF A5