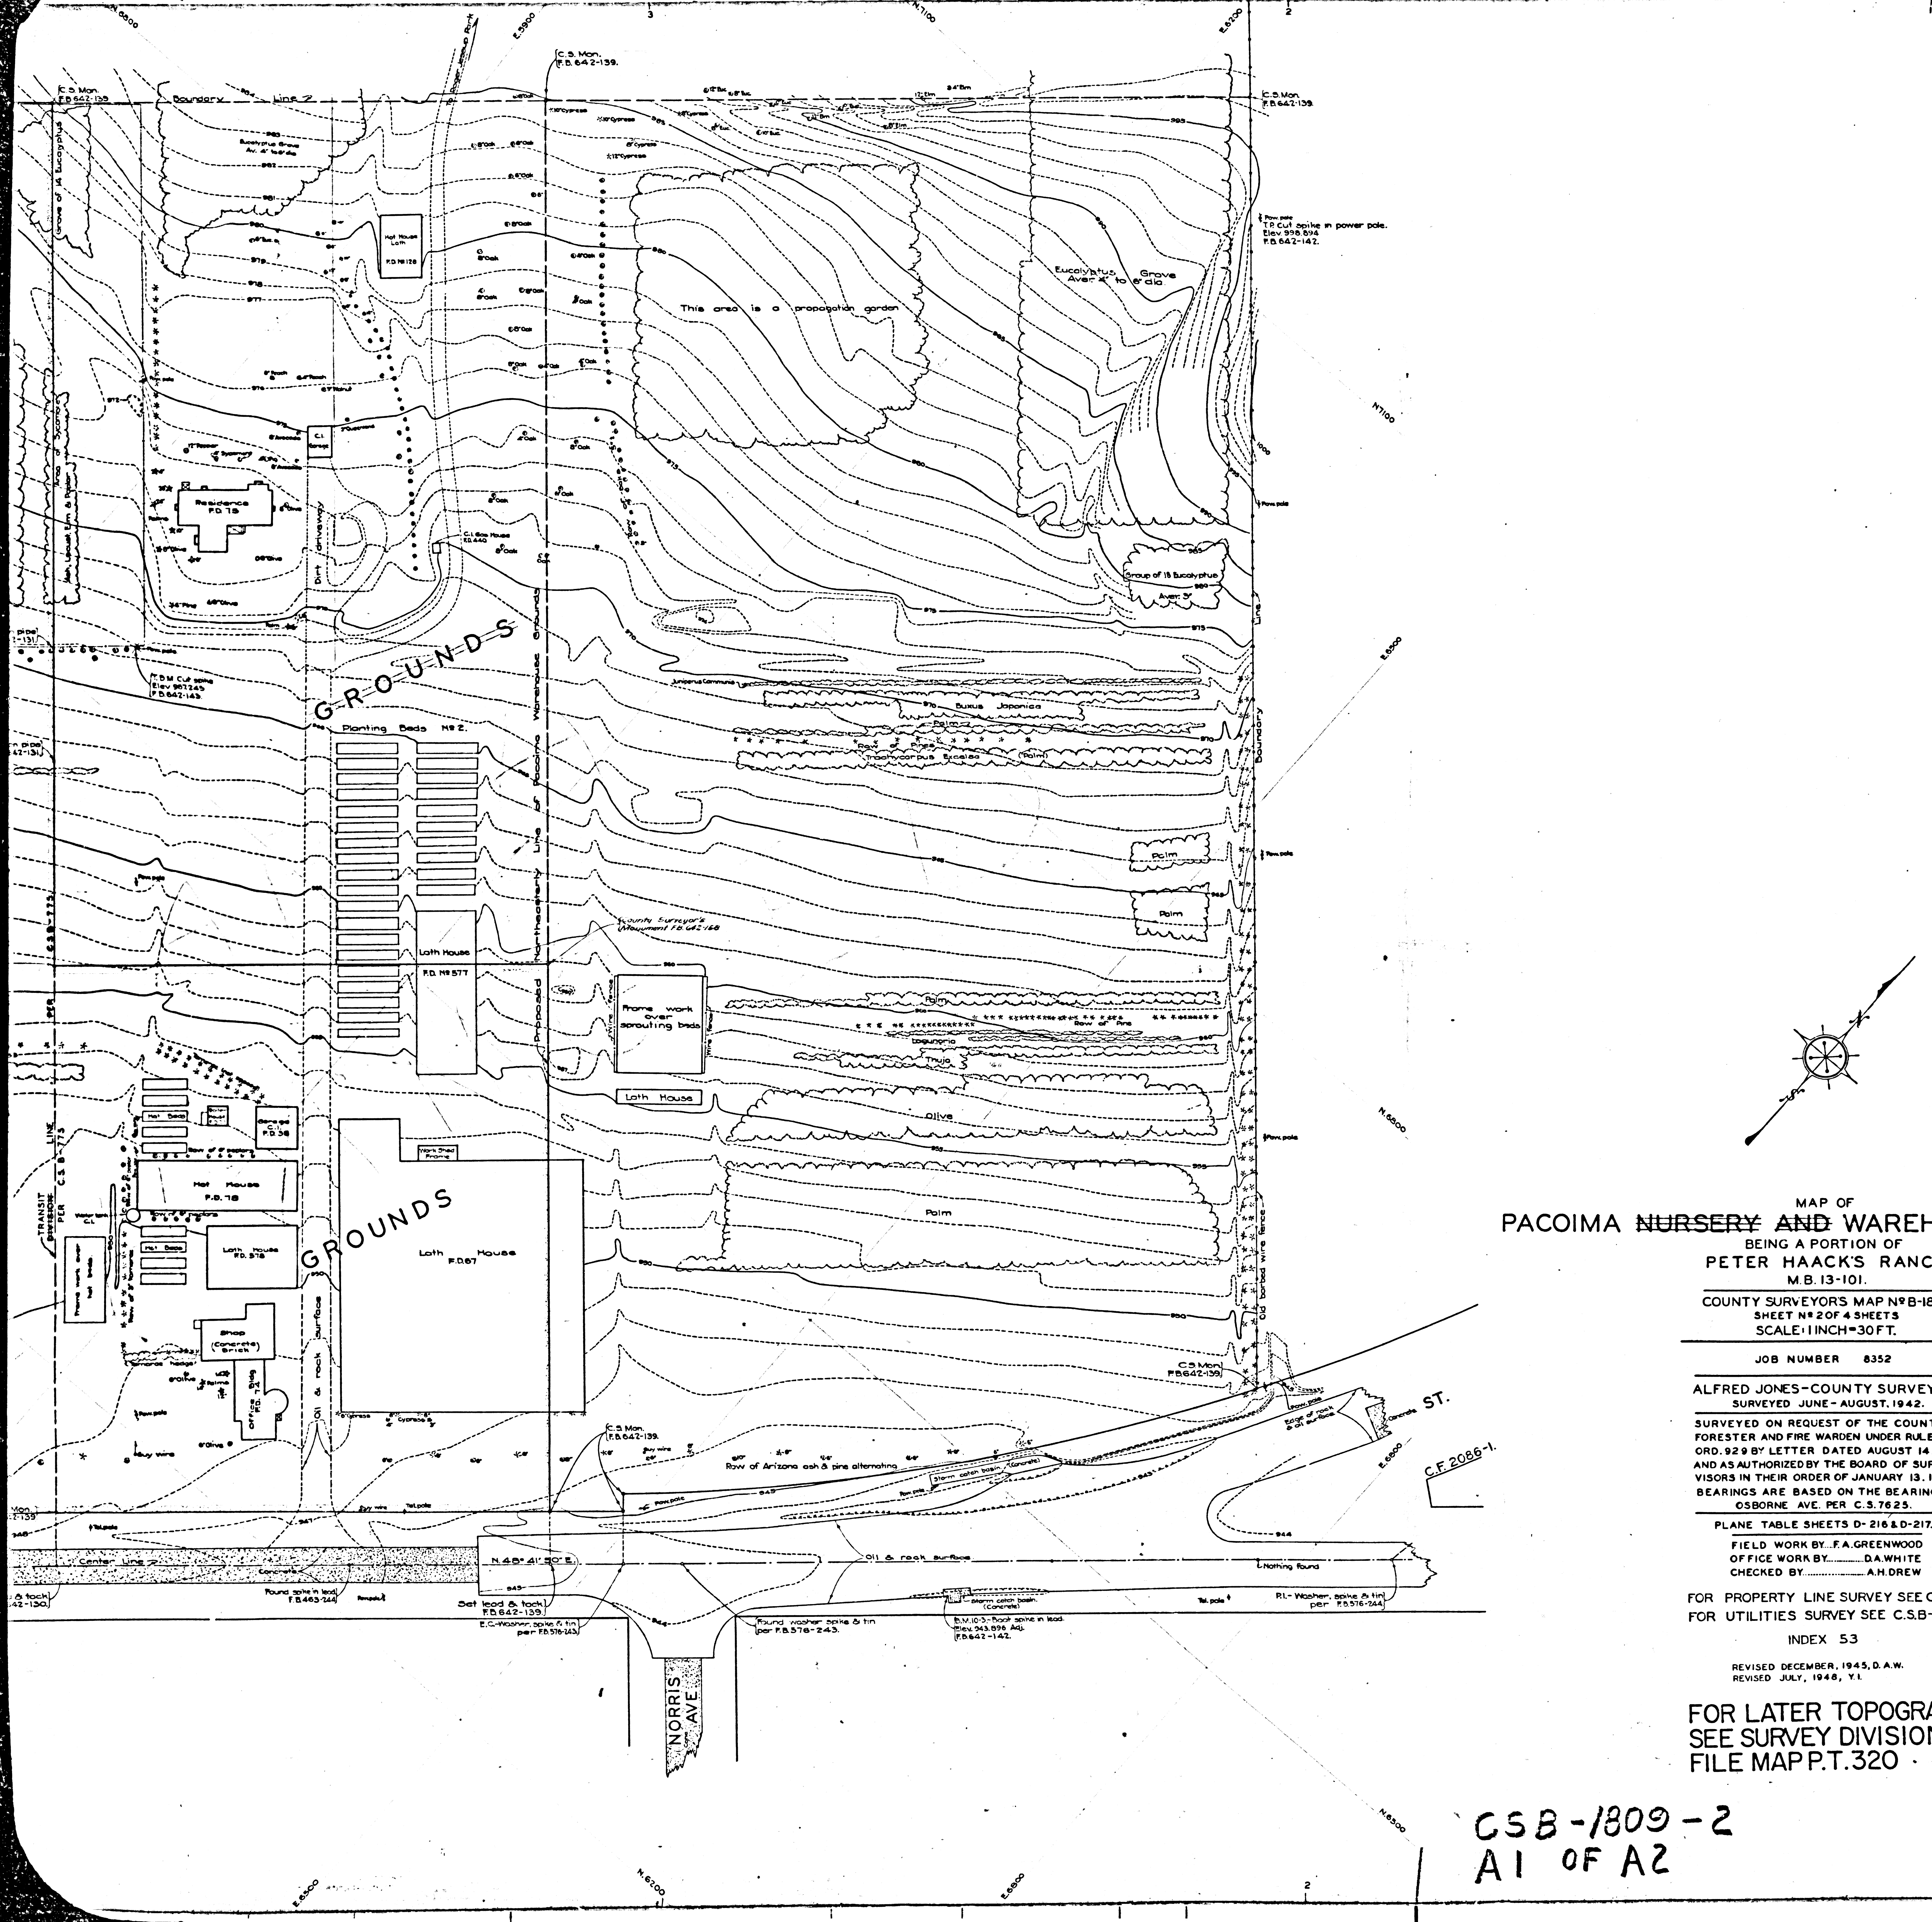
C.S. Mon. F.B. 642-139.
Boundary Line 2
To Roger Jessup Park
Eucalyptus Grove Av. 4" to 6" dia.
Grove of 14 Eucalyptus
Hot House Lath F.D. Nº 128
This area is a propagation garden
Eucalyptus Grove Aver. 4" to 6" dia.
T.P. Cut spike in power pole. Elev. 998.894 F.B. 642-142.
Pow. pole
N.7100
N.6800
E.5900
E.6200
E.6500
E.6800
N.6200
N.6500
Area of Sycamore
Ash, Locust, Elm & Poplar
C.I. Garage
Residence F.D. 75
Dirt driveway
C.I. Gas House F.D. 440
Group of 15 Eucalyptus Aver. 3"
Line
T.B.M. Cut spike Elev. 967.245 F.B. 642-143.
GROUNDS
Planting Beds Nº 2.
Proposed Northeasterly Line of Pacoima Warehouse Grounds
Juniperus Communis
Buxus Japonica
Palm
Row of Pines
Trachycarpus Excelsa (Palm)
Boundary
County Surveyor's Monument F.B. 642-168
Lath House F.D. Nº 577
Frame work over sprouting beds
Wire fence
Row of Pine
Laguneria
Thuja
Olive
Lath House
C.S.B-775 LINE
PER C.S.B-775
TRANSIT TRAVERSE
Hot Beds
Boiler House
Garage C.I. F.D. 38
Row of 8" poplars
Hot House F.D. 78
Water tank C.I.
Frame work over hot beds
Laith House F.D. 578
Row of 2" Tamarix
Shop (Concrete) Brick
Tamarix hedge
Office Bldg F.D. 74
Oil & rock surface
Work Shed Frame
GROUNDS
Lath House F.D. 87
Old barbed wire fence
C.S. Mon. F.B. 642-139.
Row of Arizona ash & pine alternating
Storm catch basin (Concrete)
Edge of rock & oil surface
Concrete
ST.
C.F. 2086-1.
Center Line
Concrete
N. 48° 41' 50" E.
Oil & rock surface
Nothing found
Found spike in lead F.B. 463-244
Set lead & tack F.B. 642-139.
E.C.-Washer, spike & tin per F.B. 576-243.
Found washer spike & tin per F.B. 576-243.
Storm catch basin (Concrete)
B.M. 10-3.-Boat spike in lead. Elev. 943.896 Adj. F.B. 642-142.
P.I.-Washer, spike & tin per F.B. 576-244.
Tel. pole
NORRIS AVE.
2
3

MAP OF

PACOIMA ~~NURSERY AND~~ WAREHOUSE GROUNDS

BEING A PORTION OF
PETER HAACK'S RANCH
M.B. 13-101.

COUNTY SURVEYOR'S MAP Nº B-1809
SHEET Nº 2 OF 4 SHEETS
SCALE: 1 INCH=30 FT.

JOB NUMBER 8352

ALFRED JONES-COUNTY SURVEYOR
SURVEYED JUNE-AUGUST, 1942.

SURVEYED ON REQUEST OF THE COUNTY FORESTER AND FIRE WARDEN UNDER RULE 21 ORD. 929 BY LETTER DATED AUGUST 14, 1941 AND AS AUTHORIZED BY THE BOARD OF SUPERVISORS IN THEIR ORDER OF JANUARY 13, 1930. BEARINGS ARE BASED ON THE BEARING OF OSBORNE AVE. PER C.S. 7625.

PLANE TABLE SHEETS D-216 & D-217.

FIELD WORK BY....F.A. GREENWOOD
OFFICE WORK BY..........D.A. WHITE
CHECKED BY..................A.H. DREW

FOR PROPERTY LINE SURVEY SEE C.S.B-775.
FOR UTILITIES SURVEY SEE C.S.B-1809-3,4.

INDEX 53

REVISED DECEMBER, 1945, D.A.W.
REVISED JULY, 1948, Y.I.

FOR LATER TOPOGRAPHY
SEE SURVEY DIVISION FILE
FILE MAP P.T.320

CSB-1809-2
A1 OF A2

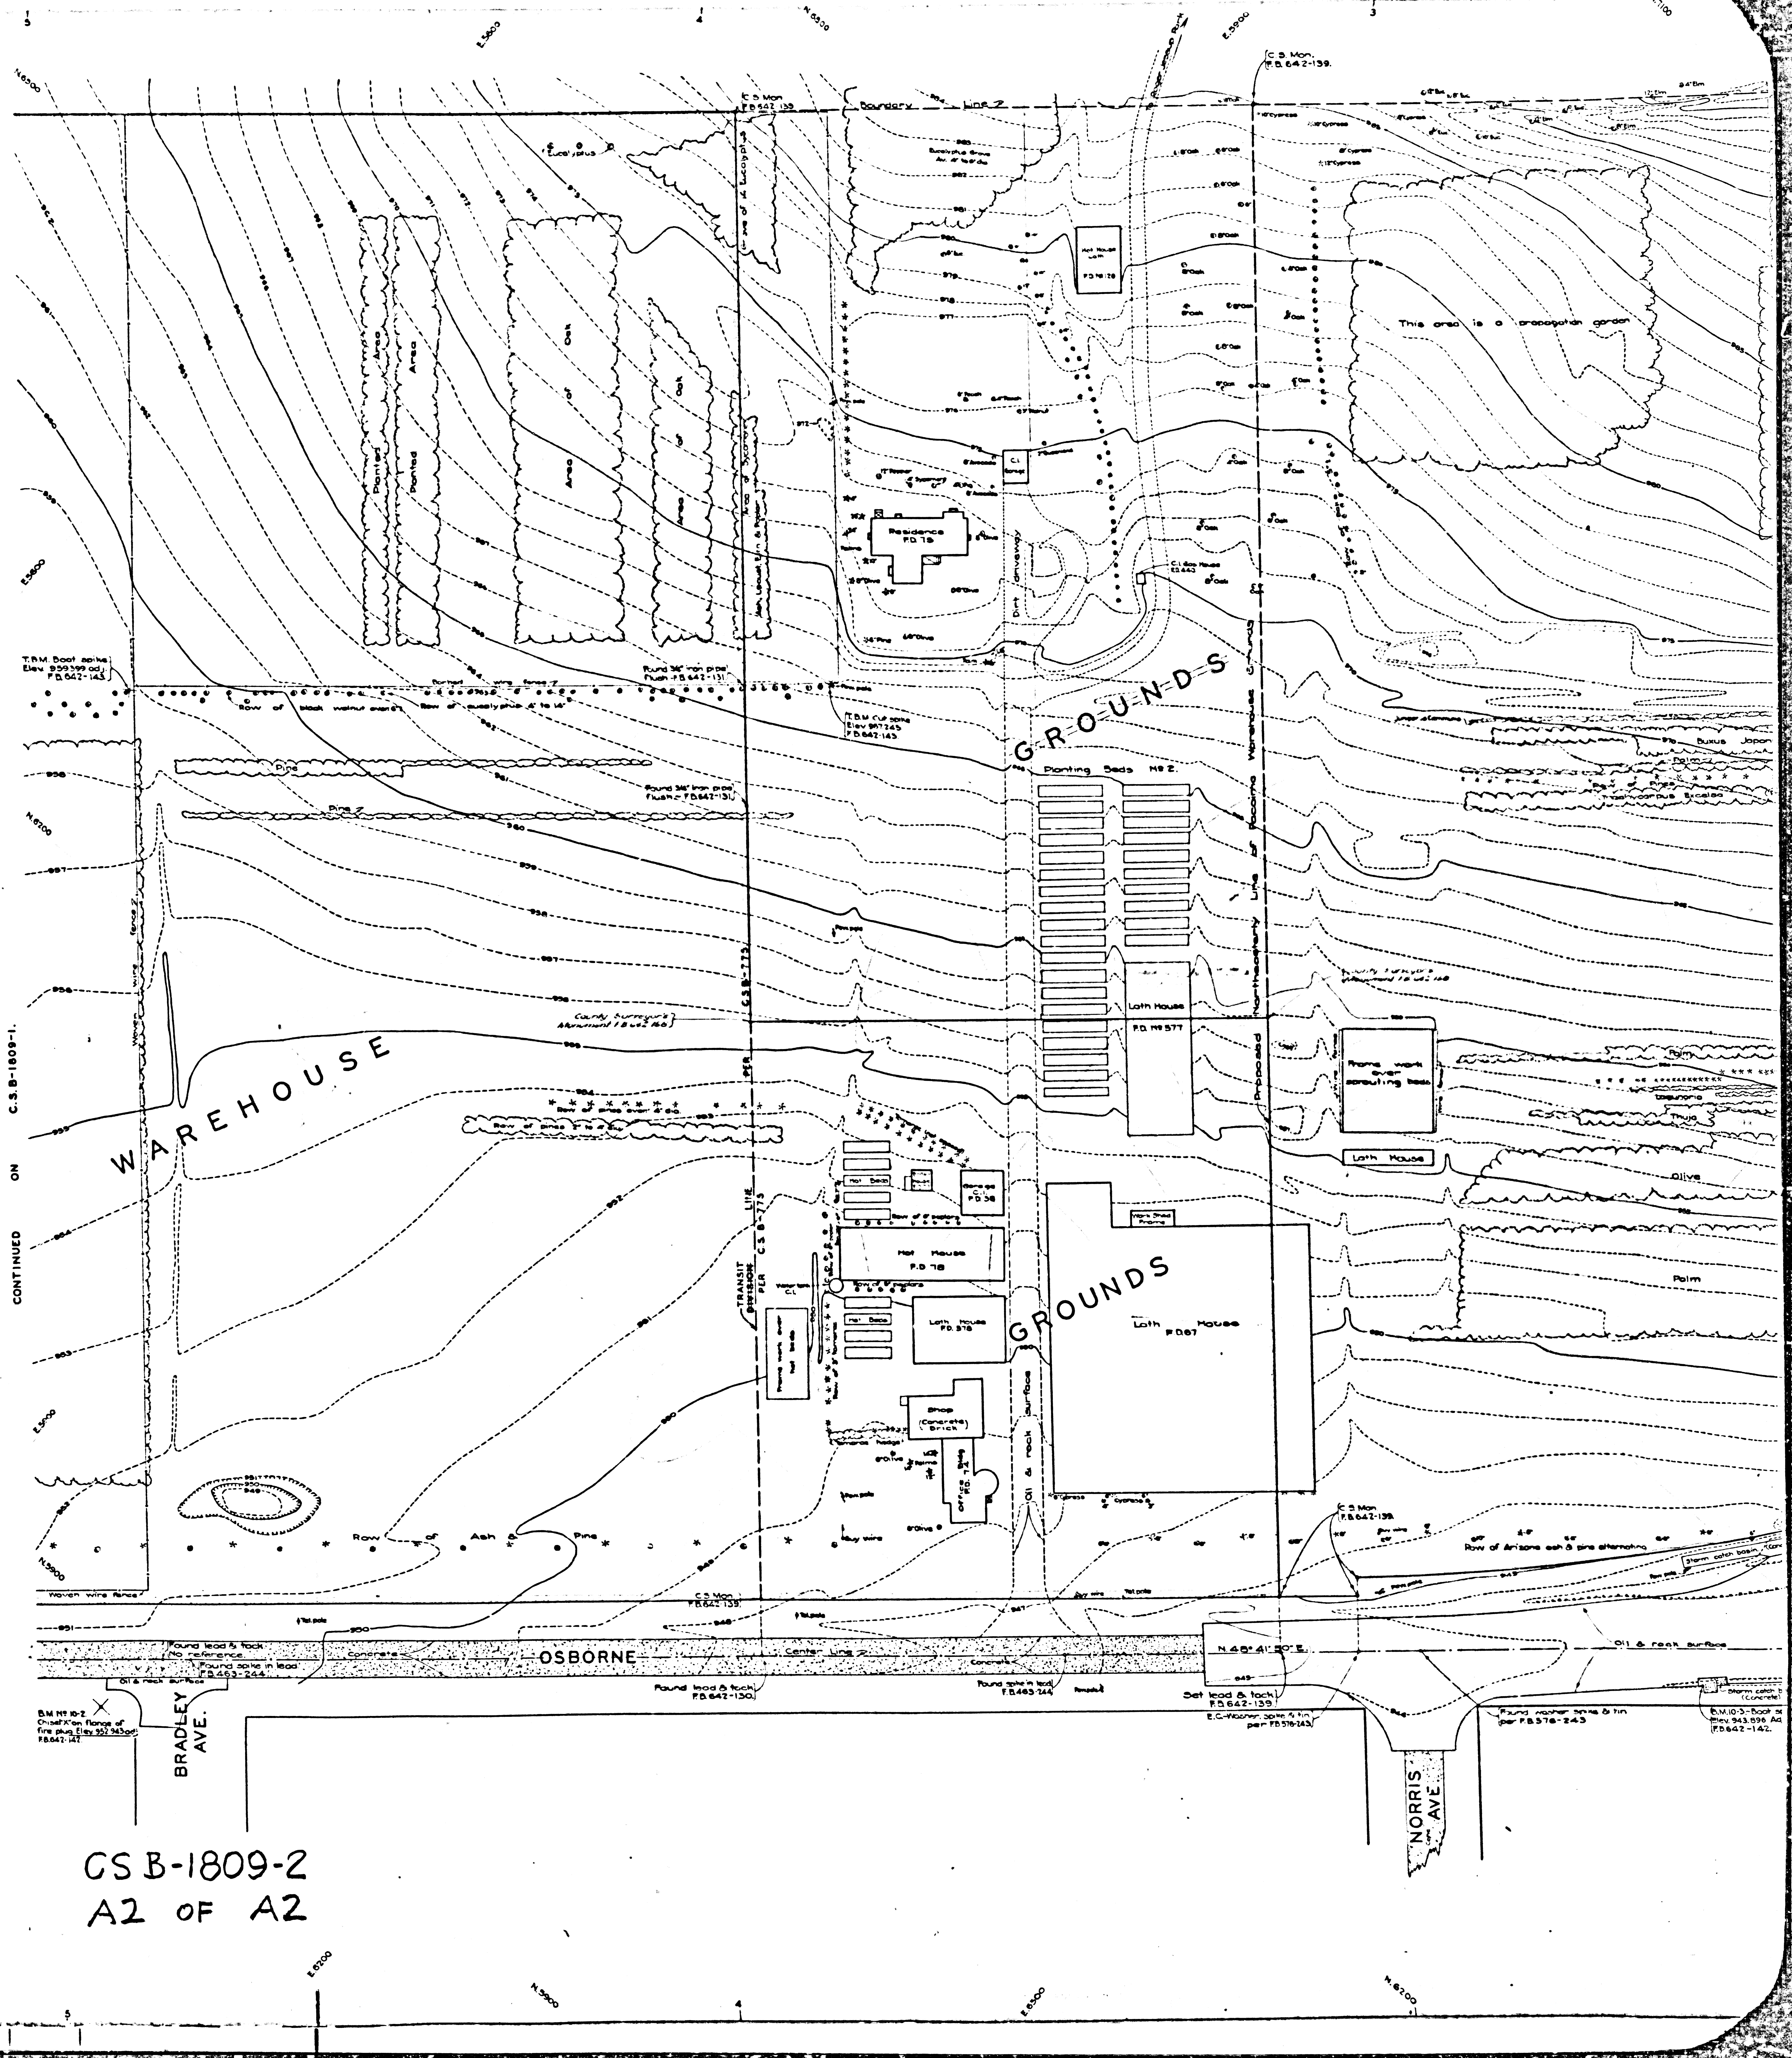
N.6300
E.5800
N.6900
E.5900
C.S. Mon. F.B. 642-139.
N.7100
Boundary Line
Eucalyptus
Eucalyptus Grove Av. 4" to 6" dia.
Row of 14 Eucalyptus
Planted Area
Planted Area
Area of Oak
Area of Oak
Area of Sycamore
Ash, Locust, Elm & Poplar
Hot House Lath F.D. № 120
This area is a propagation garden
Residence F.D. 75
C.I. Garage
C.I. Gas House F.D. 443
Dirt driveway
T.B.M. Boot spike Elev. 959.399 adj. F.B. 642-143.
Barbed wire fence
Row of black walnut over 6"
Row of eucalyptus 4" to 14"
Found 3/4" iron pipe flush F.B. 642-131
T.B.M. Cut spike Elev. 967.245 F.B. 642-143.
GROUNDS
Planting Beds № 2.
Pine
Pine
Found 3/4" iron pipe flush F.B. 642-131
Woven wire fence
County Surveyor's Monument 1 B 642 166
C.S.B.-773
Lath House F.D. № 577
Proposed Northeasterly Line of Pacoima Warehouse Grounds
Buxus Japonica
Palm
Row of Pines
Trachycarpus Excelsa
Frame work over sprouting beds
Casuarina
Thuja
Lath House
Olive
Palm
WAREHOUSE
C.S.B.-1809-1.
CONTINUED ON C.S.B.-1809-1.
Row of pines over 4" dia.
Row of pines 2" to 4" dia.
TRANSIT DIVISION PLR C.S.B.-775 LINE
Hot Beds
Garage C.I. F.D. 38
Row of 8" poplars
Hot House F.D. 78
Water tank C.I.
Row of 8" poplars
Frame work over hot beds
Row of 8" tamarisk
Lath House F.D. 378
Shop (Concrete) Brick
Tamarisk hedge
Office Bldg. F.D. 71
Work Shed Frame
Lath House F.D. 67
Oil & rock surface
GROUNDS
Row of Ash & Pine
E.5900
N.5900
Woven wire fence
C.S. Mon. F.B. 642-139.
C.S. Mon. F.B. 642-139.
Row of Arizona ash & pine alternating
Storm catch basin (Concrete)
Found lead & tack No reference.
Found spike in lead F.B. 463-244
Concrete
OSBORNE
Center Line
Found lead & tack F.B. 642-130.
Found spike in lead F.B. 463-244
N. 48° 41' 30" E.
Oil & rock surface
Set lead & tack F.B. 642-139.
E.C.-Washer, spike & tin per F.B. 576-243.
Found washer spike & tin per F.B. 576-243
B.M. 10-3.-Boot spike Elev. 943.896 Adj. F.B. 642-142.
Oil & rock surface
B.M. № 10-2. Chisel X on flange of fire plug Elev. 952.943 adj. F.B. 642-147.
BRADLEY AVE.
NORRIS AVE.
E.6200
N.5900
E.6300
N.6200
3
4
5

CS B-1809-2
A2 OF A2